





CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD


REV.	DESCRIPTION	ECN No.	APPROVED	DATE

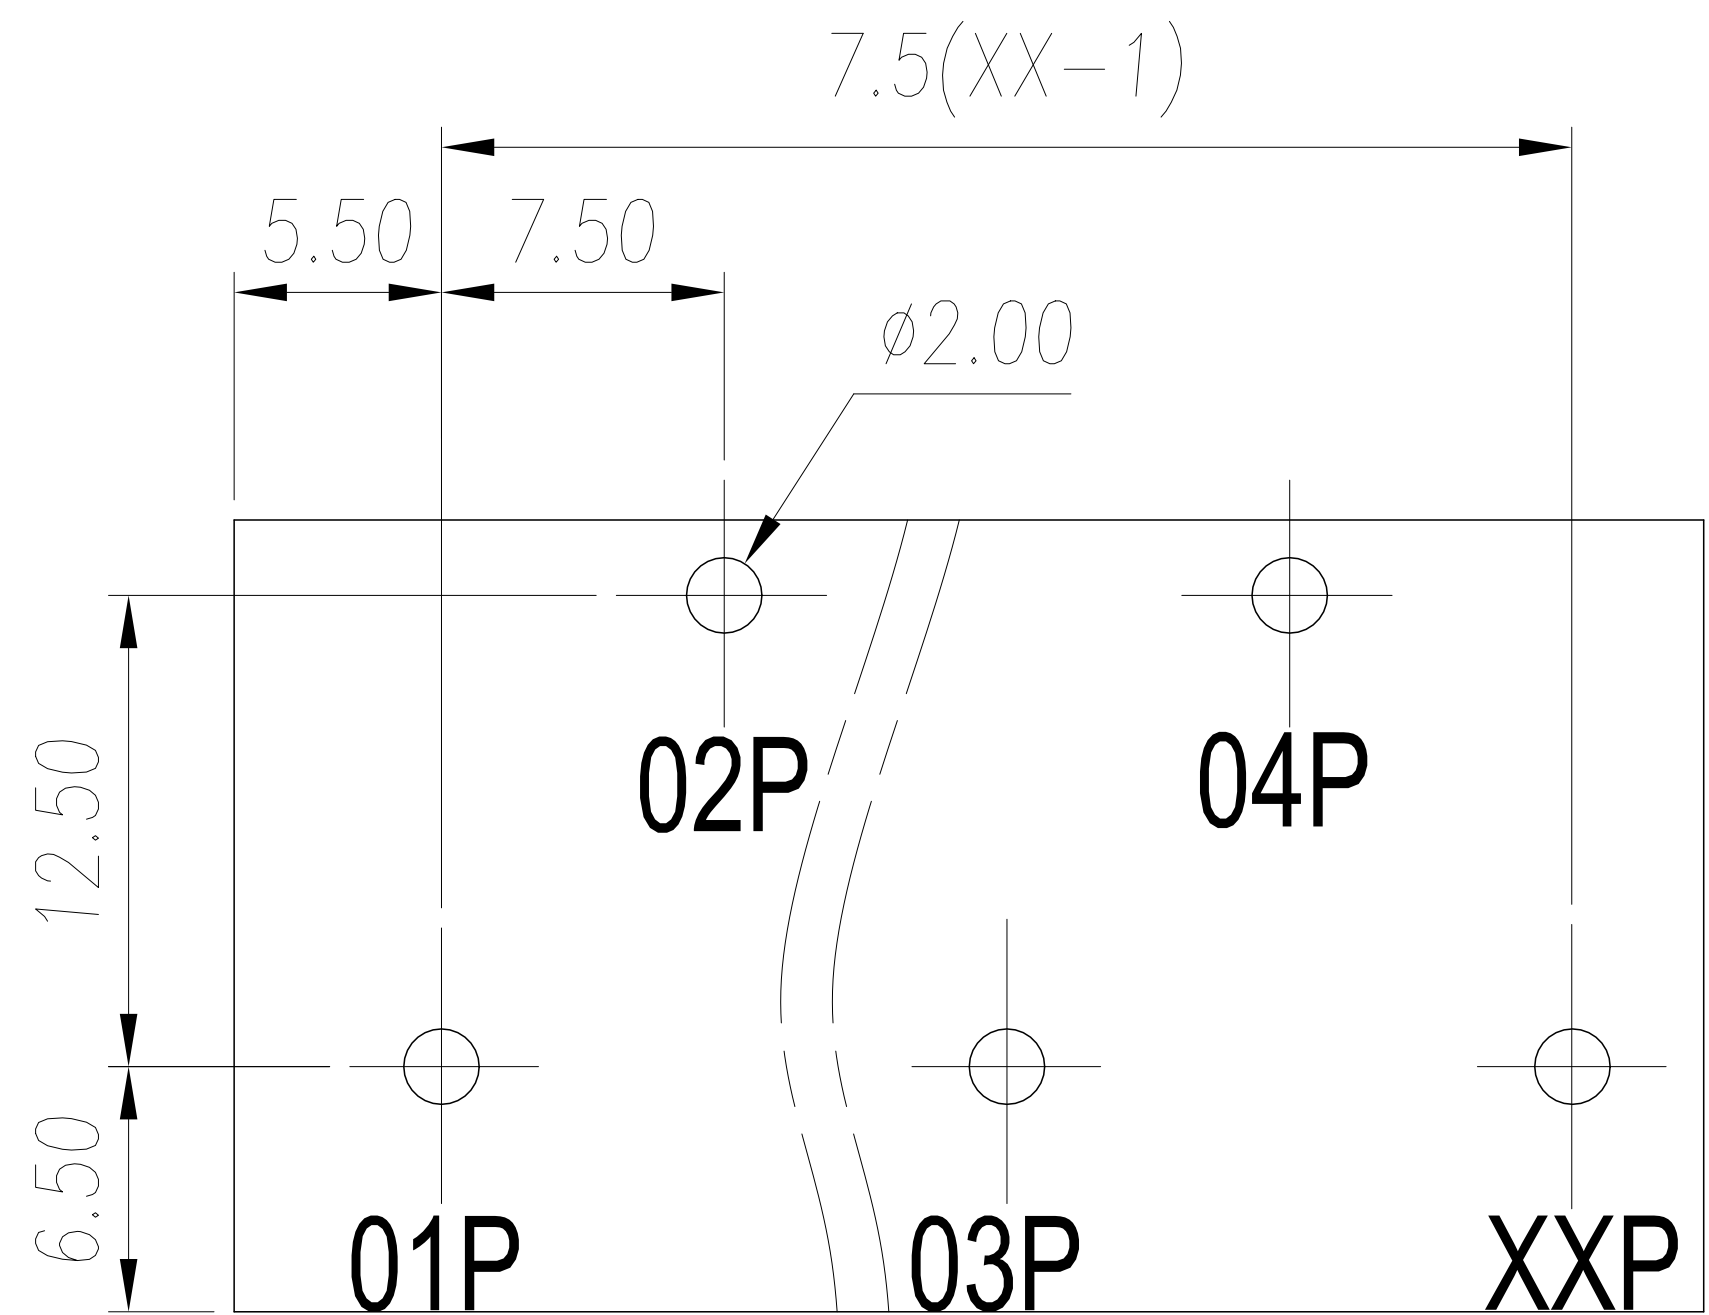


P.C.B. LAYOUT

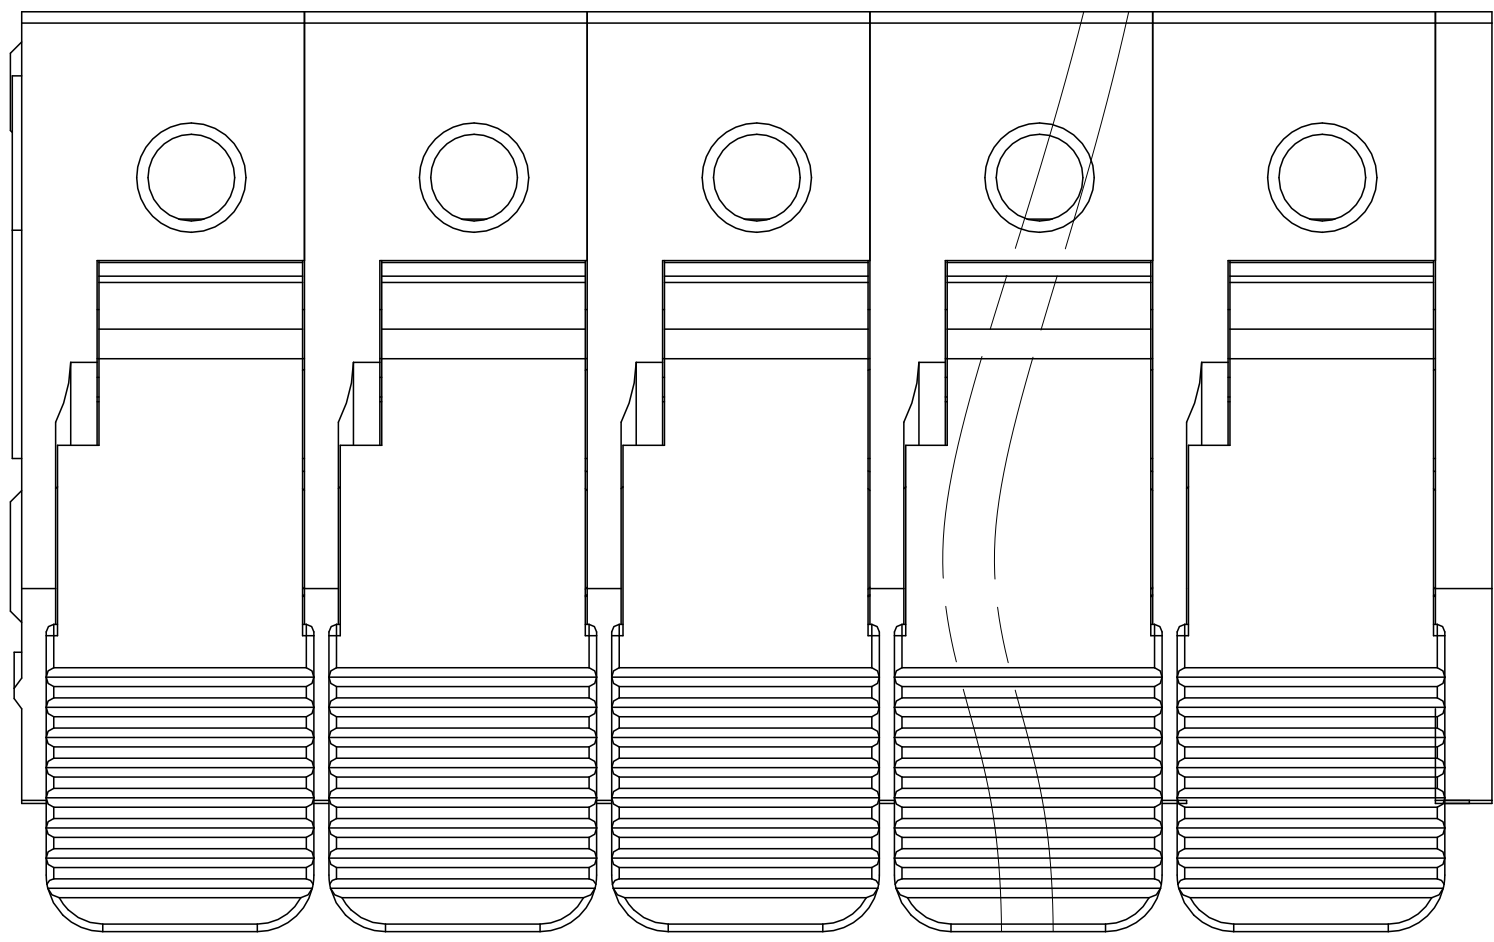

01P 02P 03P ... XXP

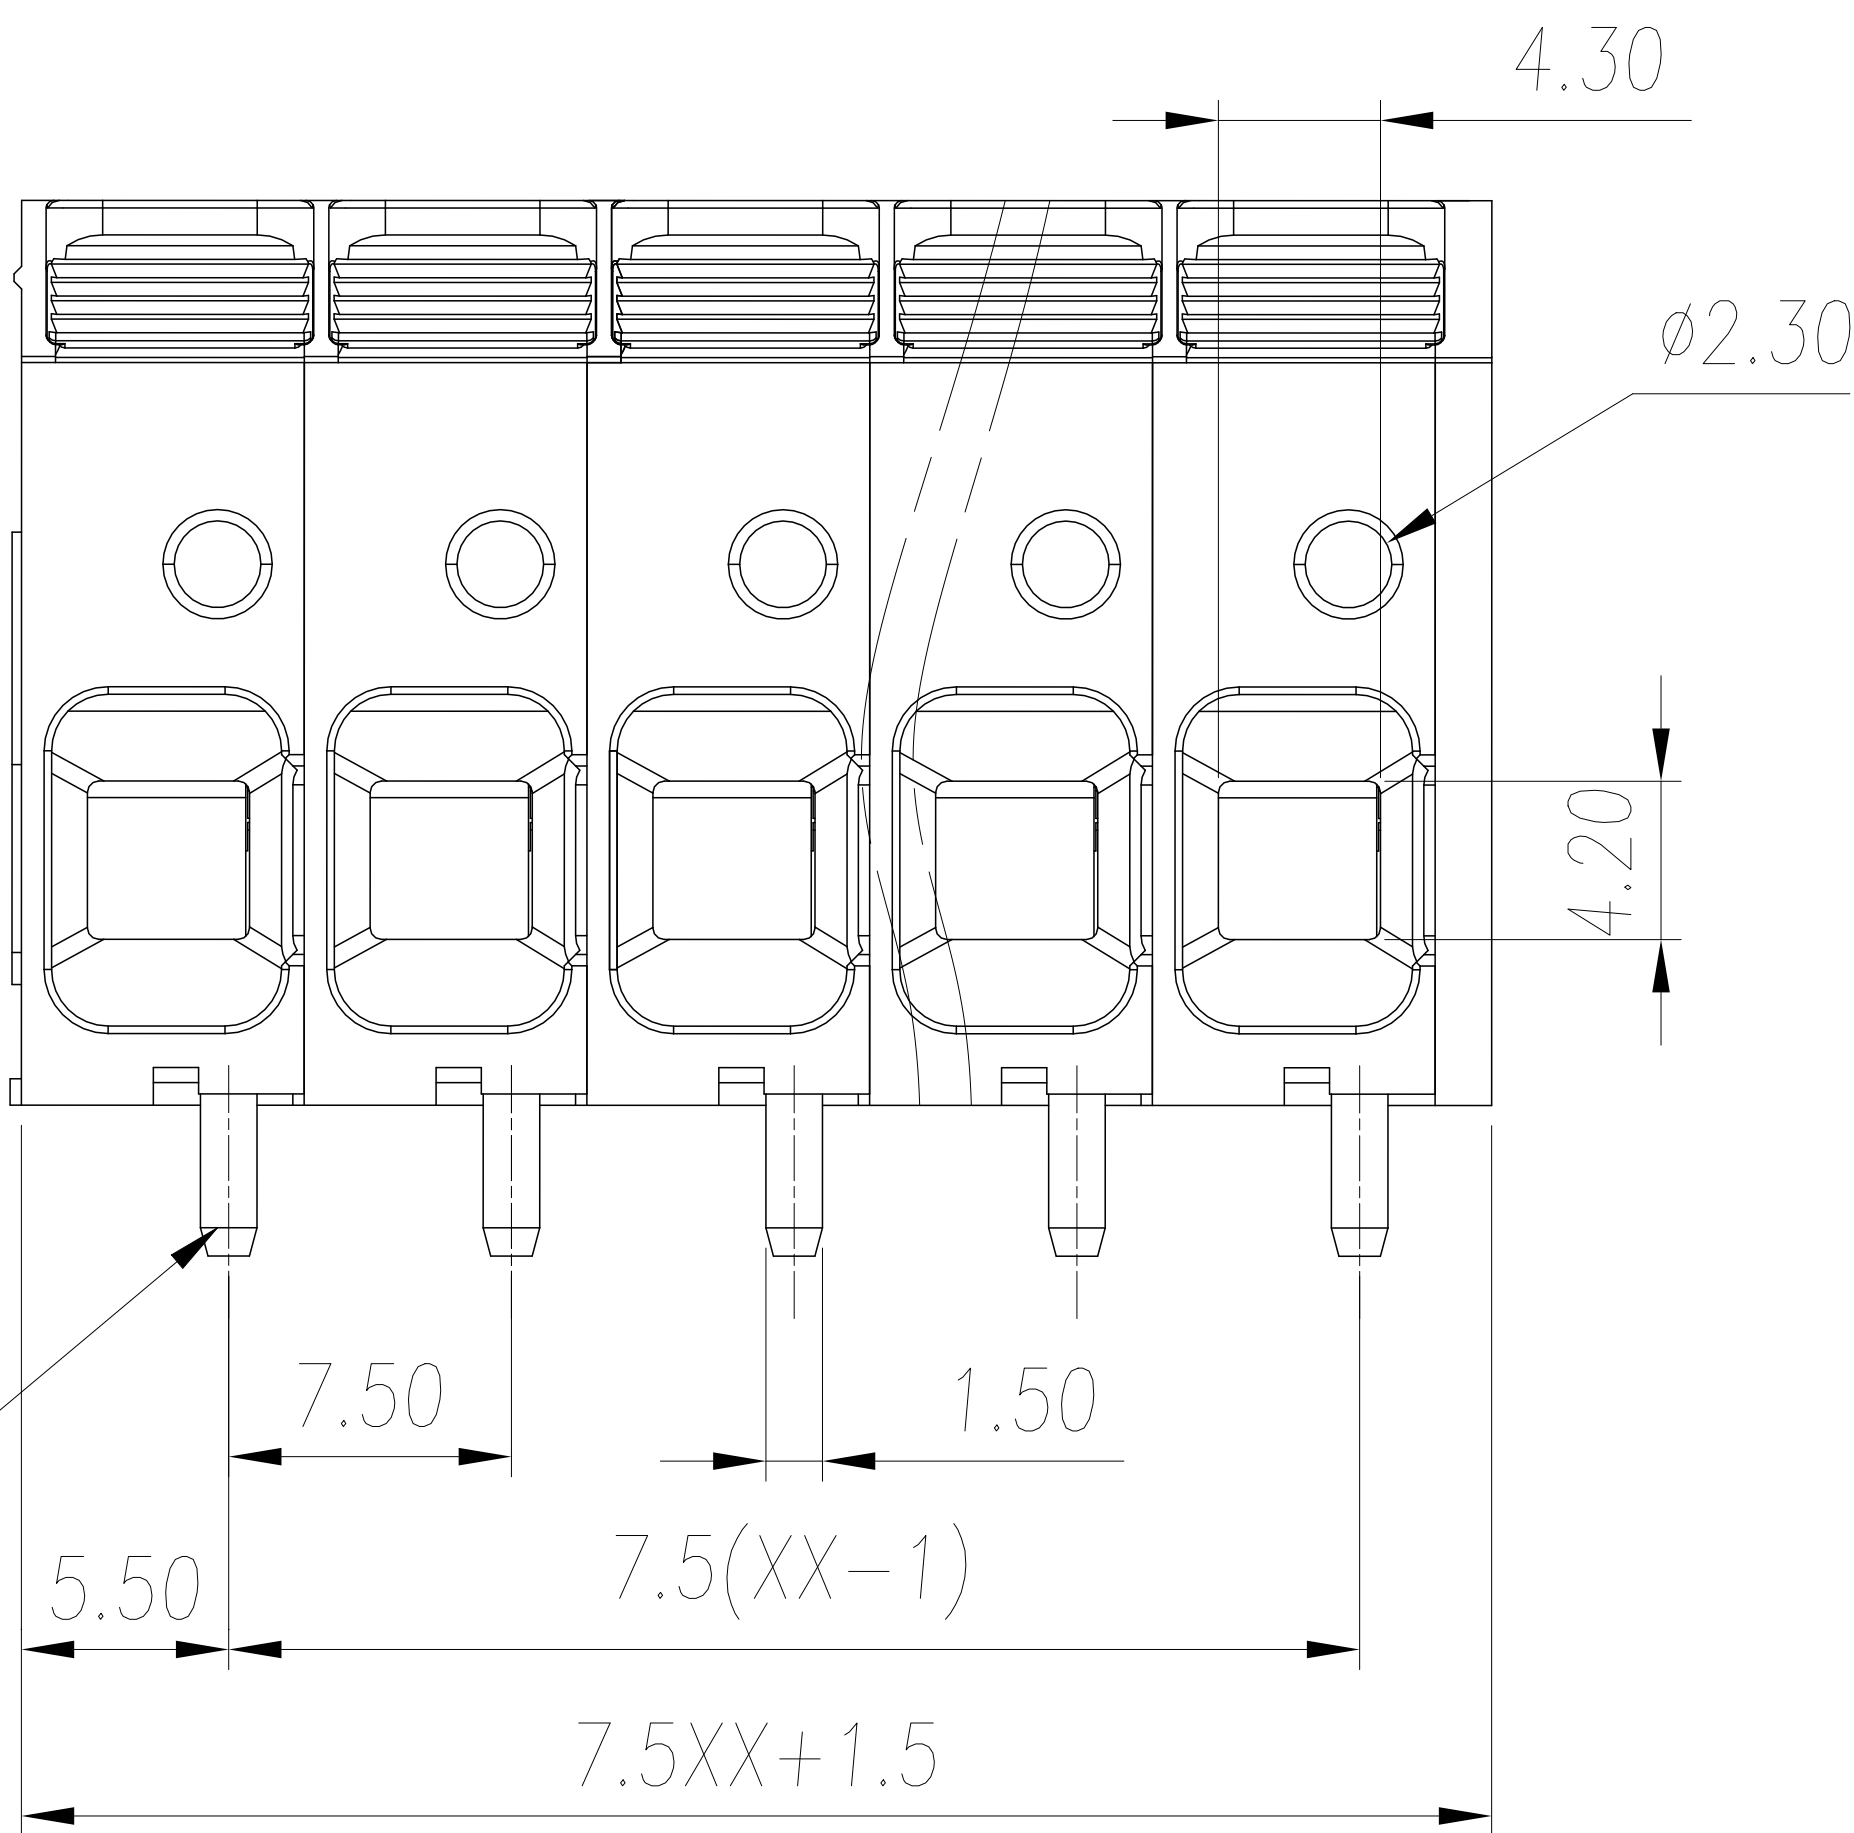

The first foot from the left side is front

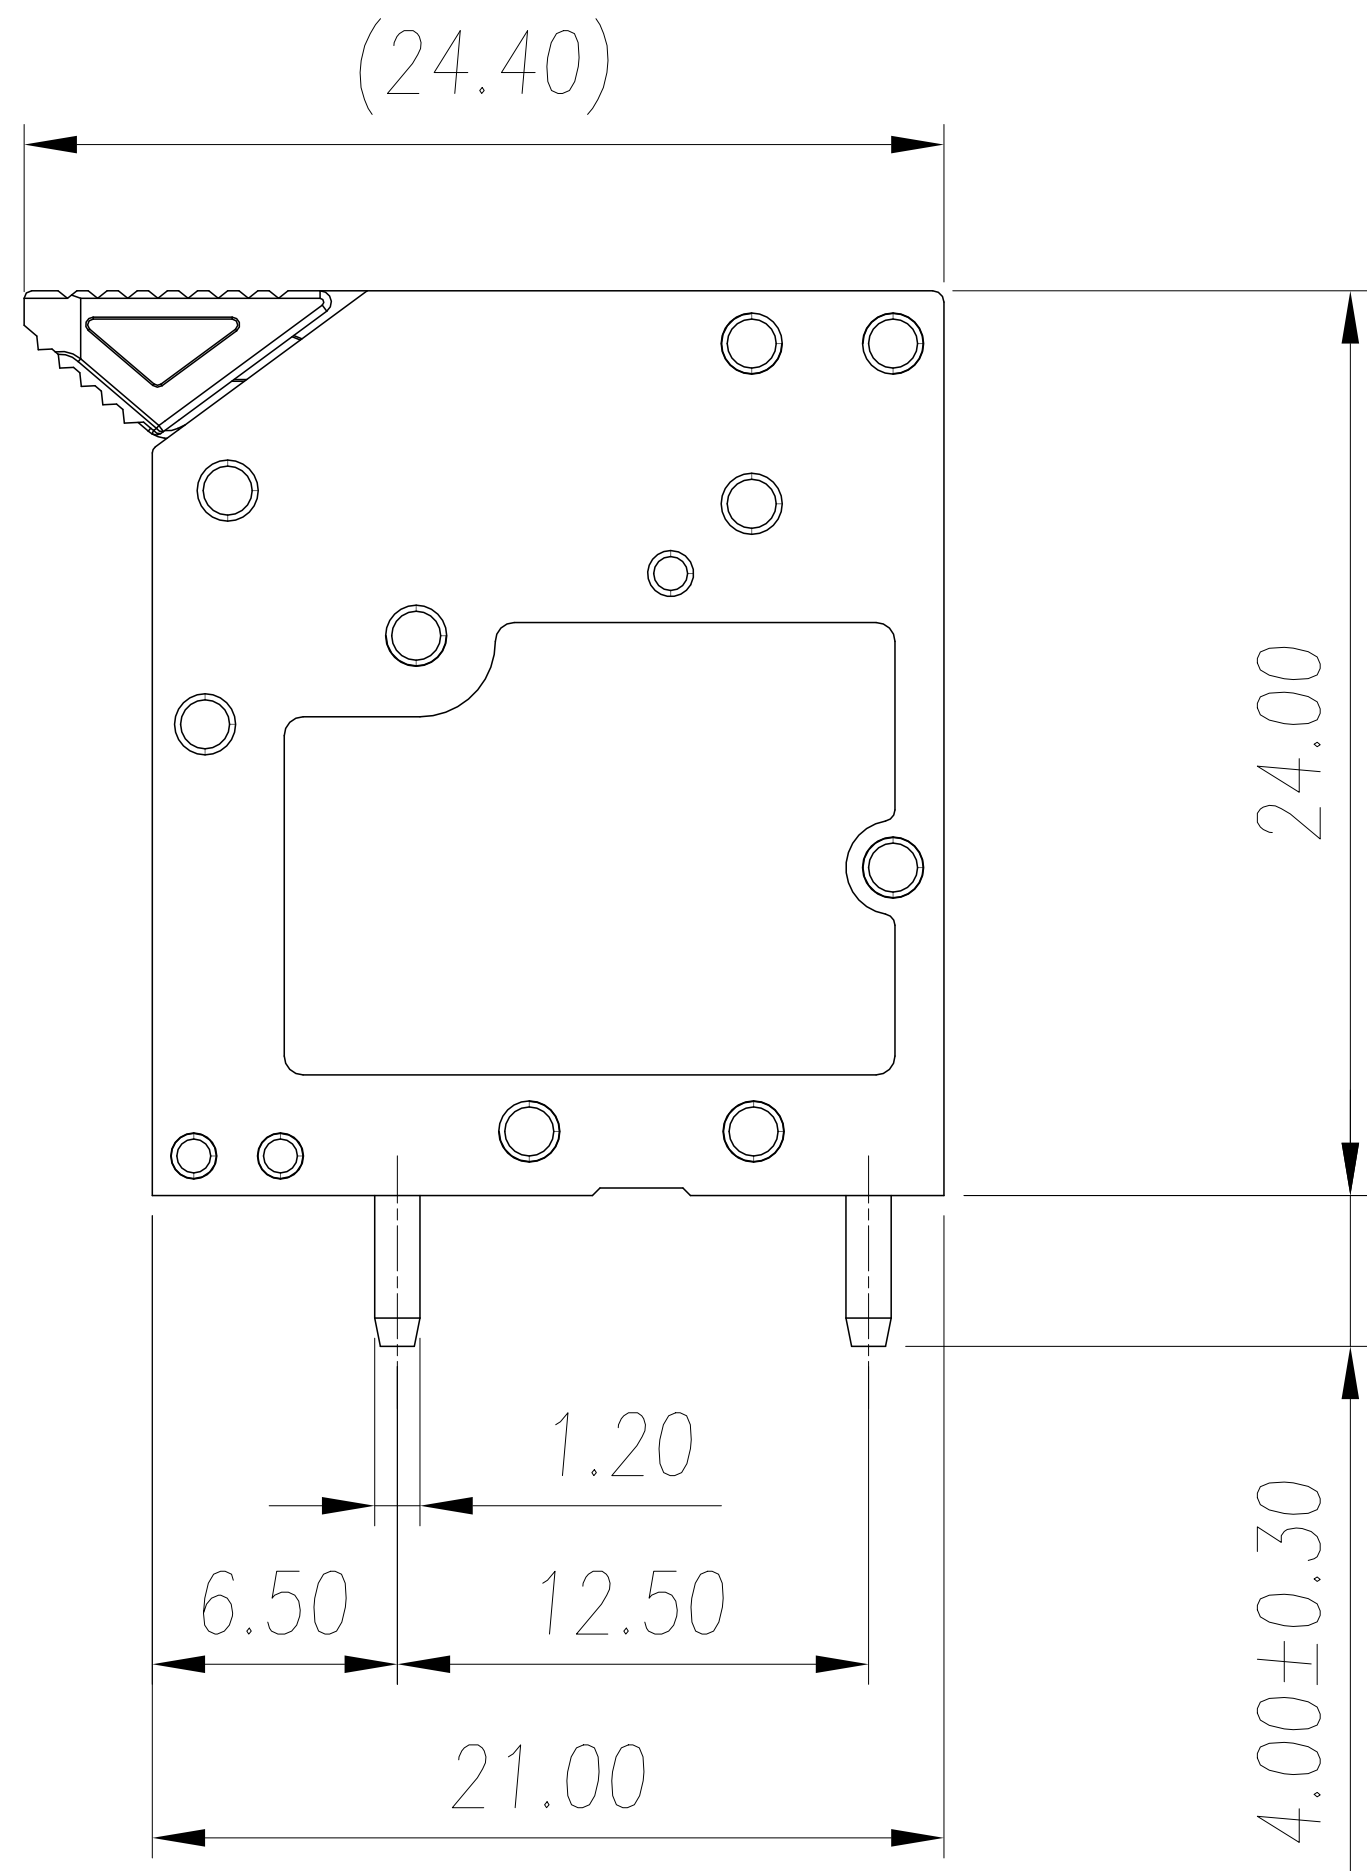

UL/CUL		Technical Data			c  us		
		Use Group	B	C	D		
		Rated Voltage [V]	600	600	600		
		Rated Current [A]	41	41	5		
		Wire Range Solid/Stranded [AWG]	8-24				
		Withstanding Voltage	2200V/1Min				
IEC			IEC60947-7-4				
IEC Technical Data							
		Overvoltage Category	III	III	II		
		Contamination Class	3	2	2		
		Rated Voltage [V]	800	1000	1000		
		Rated Current [A]	41	41	41		
		Impulse withstand voltagea [KV]	8.0	8.0	8.0		
		Conductor cross section Solid/ flexible [mm²]	0.2-10				
Material							
		Insulation Material	PA				
		Imflammability	UL94V-0				
		Contact Material	铜合金 Copper alloy				
		Contactive Coating	镀锡 Sn Plated				
Other Data							
		Pitch [mm]	7.5				
		Poles [P]	02~24				
		Stripping Length [mm]	11~13				
		Screw	-				
		Torque(Max) [N.m]	-				
		Operating temperature [°C]	-40~105				
		Pin Dimensions [m.m]	1.2*1.5				
		PCB Hole Diameter [m.m]	Ø2.0				

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

/ UNITS	mm	/ SIZE	A4	/ SCALE	2.5:1	/ THIRD ANGLE PROJECTION		/ REV	V0
CIXI WANJIE ELECTRONIC CO., LTD						TITLE		WJ2406R-7.5-XXP-1Y-00A	