








CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
△1	更新极数信息		胡航天	22.04.11

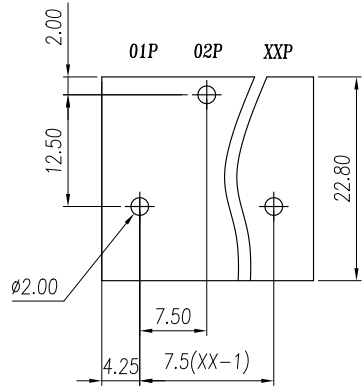

P.C.B. LAYOUT

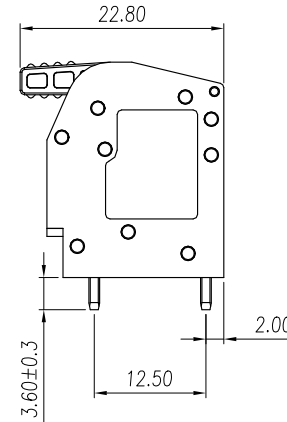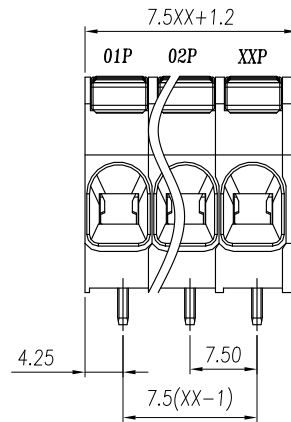

UL/CUL Technical Data				UL1059			
Use Group				B	C	D	
Rated Voltage [V]				600	600	600	
Rated Current [A]				27	27	5	
Wire Range				10-24			
Solid/Stranded [AWG]							
Withstanding Voltage				2200V/1Min			
IEC Technical Data				IEC60947-7-4			
Overvoltage Category				III	III	II	
Contamination Class				3	2	2	
Rated Voltage [V]				1000	1000	1000	
Rated Current [A]				41	41	41	
Impulse withstand voltagea [KV]				6.0	6.0	6.0	
Conductor cross section				0.2-6			
Solid/ flexible [mm ²]							
Material							
Insulation Material				PA			
Inflammability				UL94V-0			
Contactor Material				Copper alloy			
Contactive Coating				Sn Plated			
Other Data							
Pitch [mm]				7.5			
Poles [P]				02~24			
Stripping Length [mm]				15~16			
Screw				-			
Torque(Max) [N.m]				-			
Operating temperature [°C]				-40~105			
Pin Dimensions [m.m]				1.2*1.2			
PCB Hole Diameter [m.m]				Ø2.0			

linear dimension(Tolerances Standard GB/T 14486-2008)




variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS mm

SIZE A4

SCALE 2.5:1

/THIRD ANGLE PROJECTION



REV V1



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJ240R-7.5-XXP-1YY-00A