

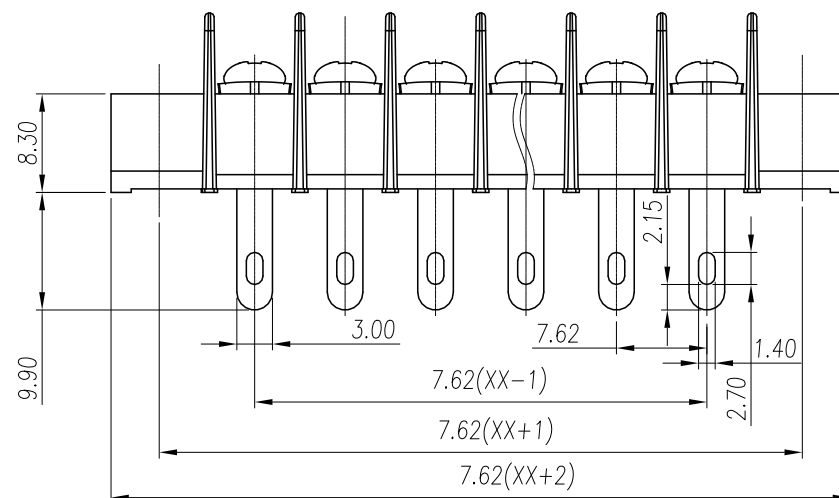


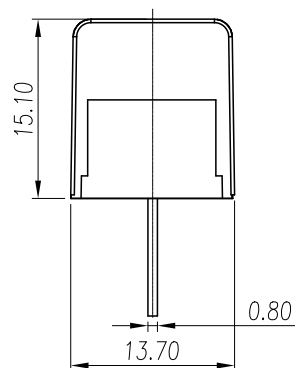

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

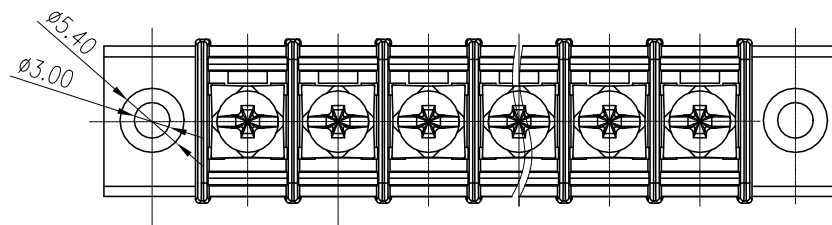

Rated voltage	300V
Rated current	20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wire range	22~14AWG
Wrth standing voltage	AC 1600V/1 Min

Torque	0.5Nm(4.5Lb.in)
Temp.Range	-40°C~+105°C
MAX Soldering	+260°C, for 5 Sec

Pitch	7.62mm
/Poles	2~24p

Housing	PA66, UL94V-0
Screws	M3.0 Steel Ni plated
Pin header	Copper alloy Sn plated

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS	mm	SIZE	A4	SCALE	1:1	THIRD ANGLE PROJECTION		REV	VO
 CIXI WANJIE ELECTRONIC CO., LTD									
						TITLE	WJ25HM-XXP-1YY-00A		