




THE SPEC SHEET

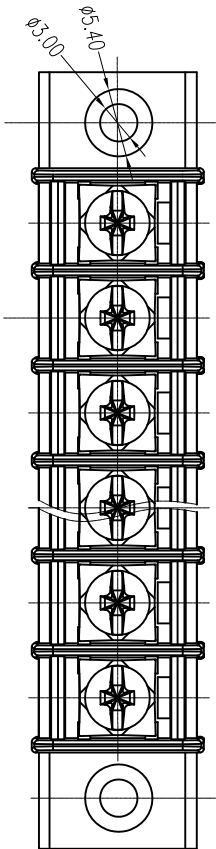

Standard

ל

Rated voltage

300V

Rated current

15A

Contact resistance

 $20\text{m}\Omega$

Insulation resistance

500M Ω /DC500V

Wire range

22~14AWG 1.5mm²

With standing voltage

AC 2000V/1 Min

Mechanical

Torque

0.5Nm(4.5lb.in)

Temp.Range

-40°C~+105°C

MAX Soldering

+250°C, for 5 Sec

Dimensions

Pitch

7.62mm

Poles

2~24p

Material


Housing

PA66, UL94V-0

Screws
M3.0 Steel Ni plated

Pin header

Brass 0.8t Tin plated

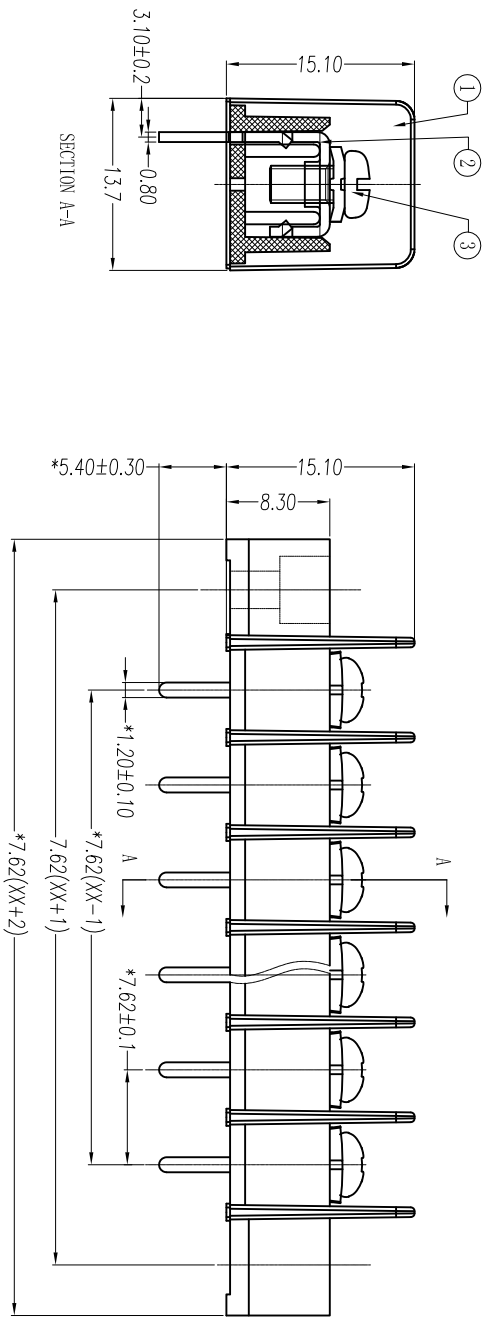

 CIXI WANJIE ELECTRONIC CO., LTD	UNITS	mm	SIZE	A4	SCALE	5:3
	THIRD ANGLE PROJECTION 					
	TITLE					
	WJ25SM-XXP-1YY-00A					