

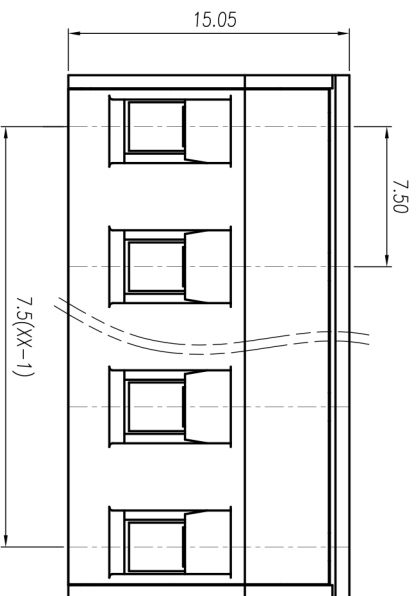


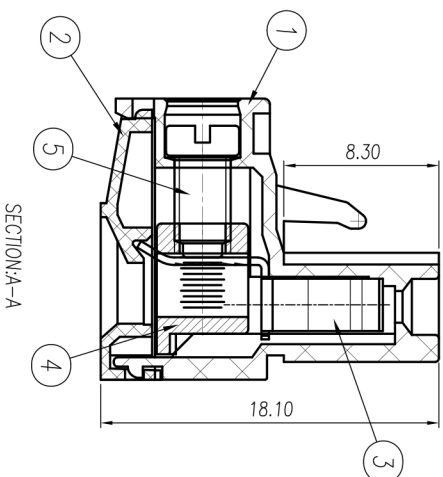

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

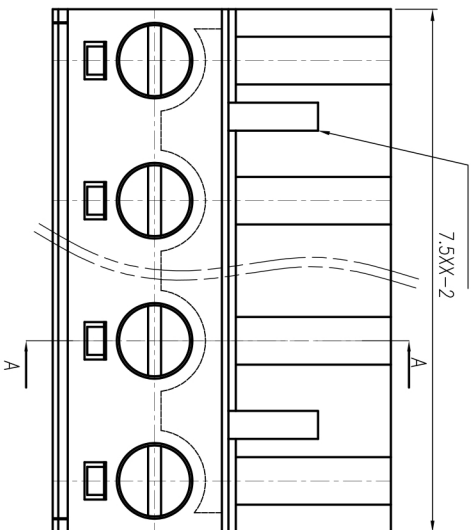

linear dimension (Tolerances Standard GB/T 14486-2008)															
variable range	6 to	over 6 to	10 to	over 10 to	18 to	over 18 to	30 to	over 30 to	50 to	over 50 to	80 to	over 80 to	120 to	over 120 to	160 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ / DC500V	
Wire range	28~14AWG	1.5mm ²
With standing voltage	AC 2000V/1 Min	

Mechanical

Torque	0.5Nm (4.5Lb.in)
Steip Length	7-8mm
Temp. Range	-40°C~+105°C

Dimensions

Pitch	7.5mm
Poles	2~24p

Material

Housing	PA66, UL94V-0
Screws	M3 Steel, Zn plated
Clamp	Phosphor bronze, Ni plated
Cage	Brass, Ni plated

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION	
							TITLE
CIXI WANJIE ELECTRONIC CO., LTD							
						WJ2EDGK-7.5-XXP-1Y-00A	