



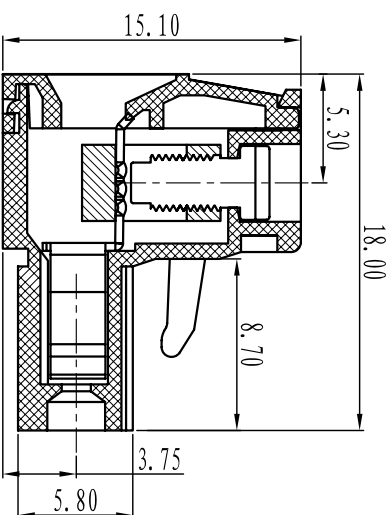

CIXI WANJIE ELECTRONIC CO., LTD

product specification

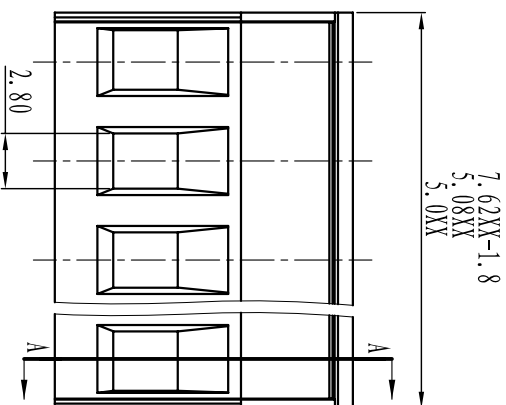

SECTION A-A

Electrical

Standard: UL IEC
Rated voltage: 250V 320V
Rated current: 10A 20A
Contact resistance: 20mΩ
Wire range: 28-12AWG 2.5mm²
Withstanding voltage: AC2000V/DC1000V
Insulation resistance: 5000MΩ/DC1000V

Mechanical


Temp.Range: -40°C~+105°C
Torque: 0.4Nm(3.6lb`in)
Strip length: 7-8mm

Dimensions

Pitch: 5.00mm,5.08mm,7.62mm
Poles: 2P-24P

Material

Housing: PA66, UL94V-0
Screws: M2.5, steel Zinc plated
Wire guard: Brass, Ni plated
Clamp: Phosphor bronze, Ni plated

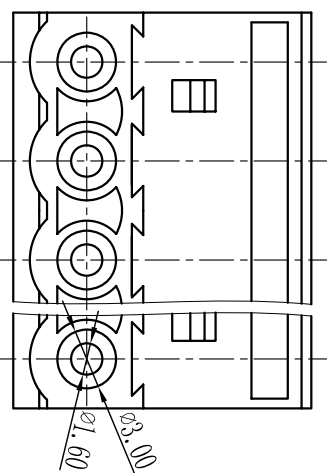

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid				
variable range	over 6 to 6	over 30 to 30	over 120 to 120	over 480 to 480	all to 6	over 6 to 6	over 10 to 10	over 50 to 50	over 120 to 120	all to 5	over 5 to 5
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'

HOW TO ORDER

Model: - P -

Pin Pitch:

Customer Request:

UNITS	mm	SIZE	A4	SCALE
-------	----	------	----	-------



CIXI WANJIE ELECTRONIC CO., LTD

NAME WJ2EDCK-XP-1YY-00A