

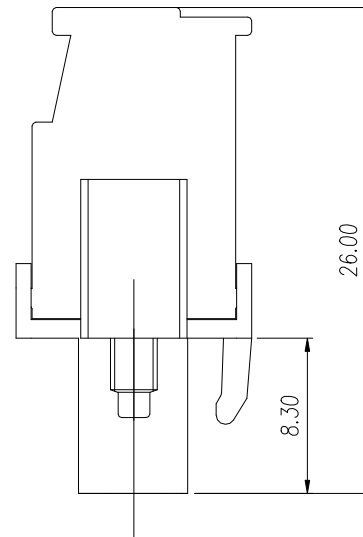
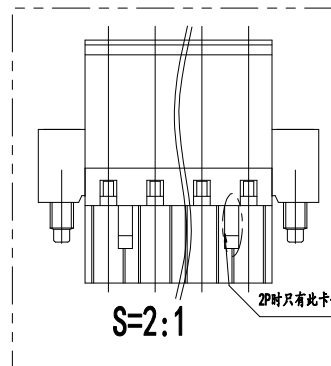


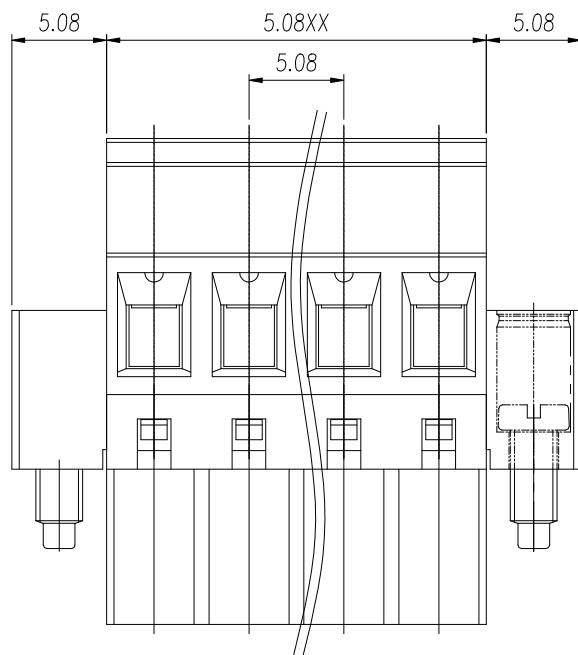

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

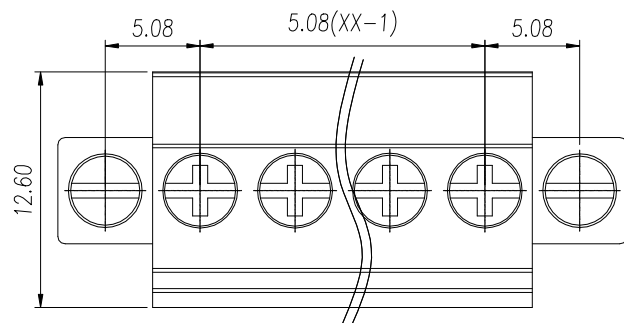

UL/CUL		UL/CUL Technical Data					
Use Group				B	C	D	
Rated Voltage		[V]	300	-	300		
Rated Current		[A]	15	-	10		
Wire Range			28-12				
Solid/Stranded		[AWG]					
Withstanding Voltage			1600V/1Min				
IEC			IEC61984				
IEC Technical Data							
Overvoltage Category			III	III	II		
Contamination Class			3	2	2		
Rated Voltage		[V]	250	320	630		
Rated Current		[A]	12	12	12		
Impulse withstand voltage		[KV]	4.0	4.0	4.0		
Conductor cross section			0.2-2.5				
Solid/ flexible			[mm²]				
Material							
Insulation Material			PA66				
Imflamability			UL94V-0				
Contactor Material			Copper alloy				
Contactive Coating			Sn Plated				
Other Data							
Pitch /	Poles	[mm] / [P]	5.08 / 02~24				
Stripping Length		[mm]	7~8				
Screw/	Torque(Max)	[N.m]	M3/0.5				
Operating temperature		[°C]	-40~105				
Soldering temperature			-				
Pin Dimensions		[mm]	-				
PCB Hole Diameter		[mm]	-				

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to		to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

UNITS mm

SIZE A4

SCALE 5:2

THIRD ANGLE PROJECTION



REV V0



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJ2EDGKBM-5.08-XXP-1YY-01A