




CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

Electrical

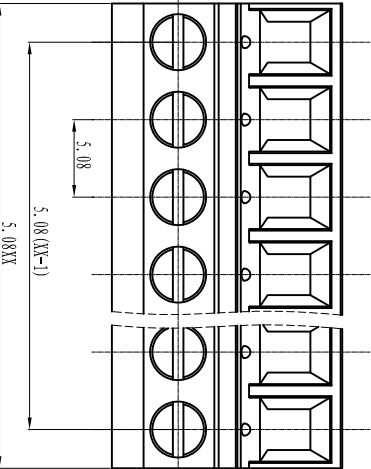

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ /DC500V	
Wire range	28~14AWG	1.5mm²
With standing voltage	AC 2000V/1 Min	

Mechanical


Torque	0.4Nm(3.6Lb.in)
Steip Length	7.8mm
Temp. Range	-40°C~+105°C

Dimensions


Pitch	5.08mm
Poles	2-24p

Material

Housing	PA66, UL94V-0
Screws	M2.5 Steel, Zn plated
Clamp	Phosphor bronze, Ni plated
Cage	Steel, Zn plated
Slide block	Steel, Zn plated

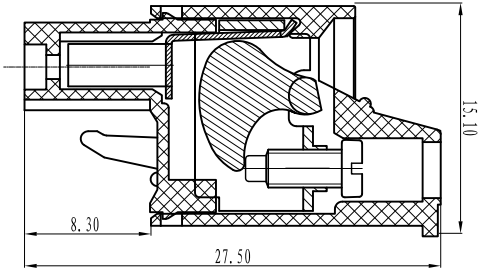

SECTION A-A

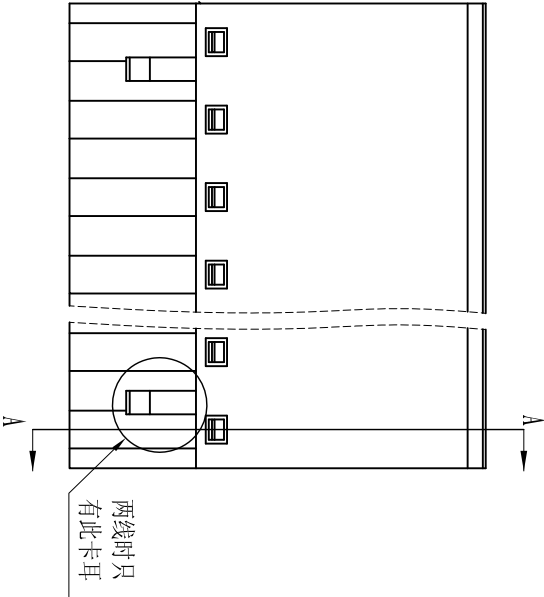

linear dimension(Tolerances Standard GB/T 14486-2008)													
	over	over	over	over	over	over	over	over	over	over	over	over	over
variable	6	10	18	30	50	80	120	160	200	250	all	5	30
range	to	to	to	to	to	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025

UNITS	mm	SIZE	A4	SCALE	2:1	THIRD ANGLE PROJECTION	
						TITLE	WJ2EDGKC-5.08-XX-1Y-00A
CIXI WANJIE ELECTRONIC CO., LTD							