
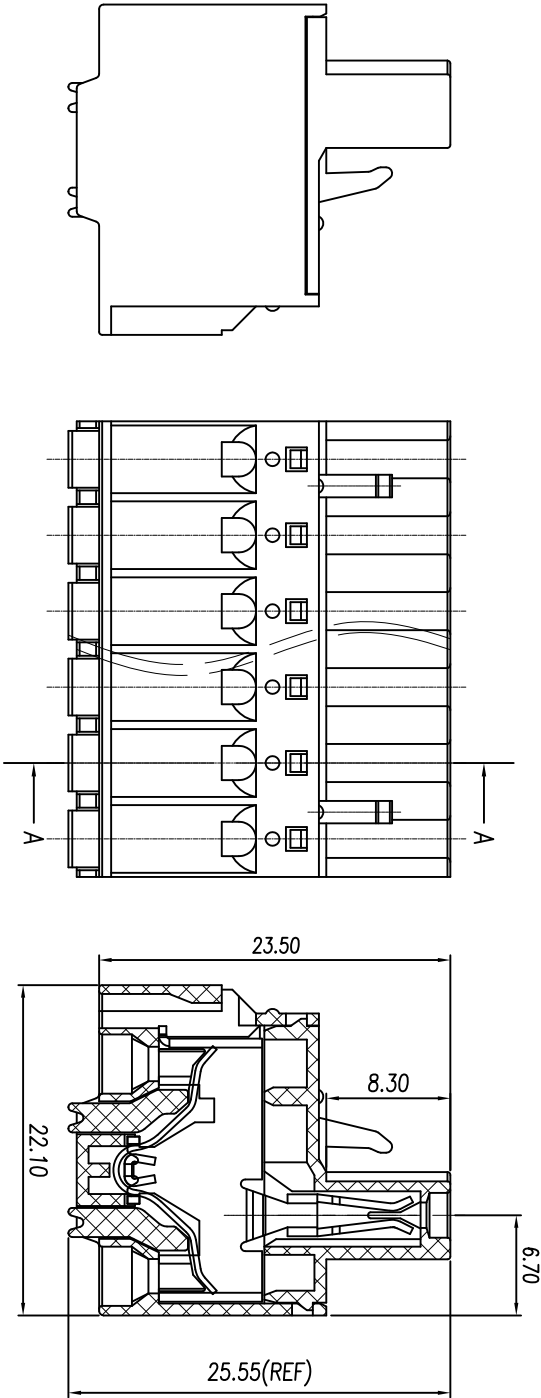


CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

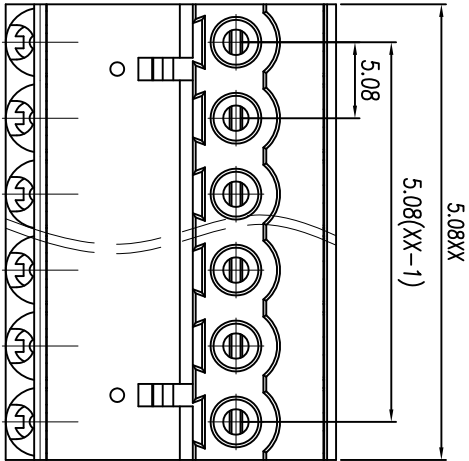

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ /DC500V	
Wire range	26~12AWG	2.5mm²
With standing voltage	AC 2000V/1 Min	

Mechanical

Steip Length	7~8mm
Temp. Range	-40℃~+105℃

Dimensions

Pitch	5.08mm
Poles	02~24P

Material

Housing	PA66, UL94V-0
Wire guard	Stainless steel
Clamp	Copper alloy, Sn plated

SECTION:A-A

linear dimension(Tolerances Standard GB/T 14486--2008)											
	over	over	over	over	over	over	over	over	over	over	over
variable	6	10	18	30	50	80	120	160	200	250	all
range	to	to	to	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJZEDKCH-5.08-XXP-1Y-00A

