



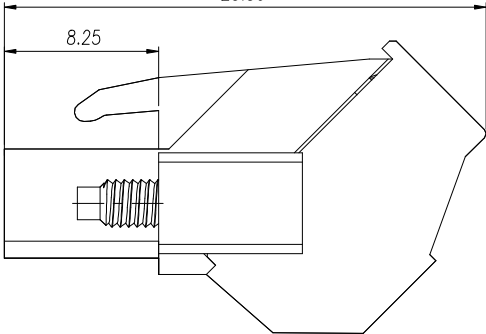

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

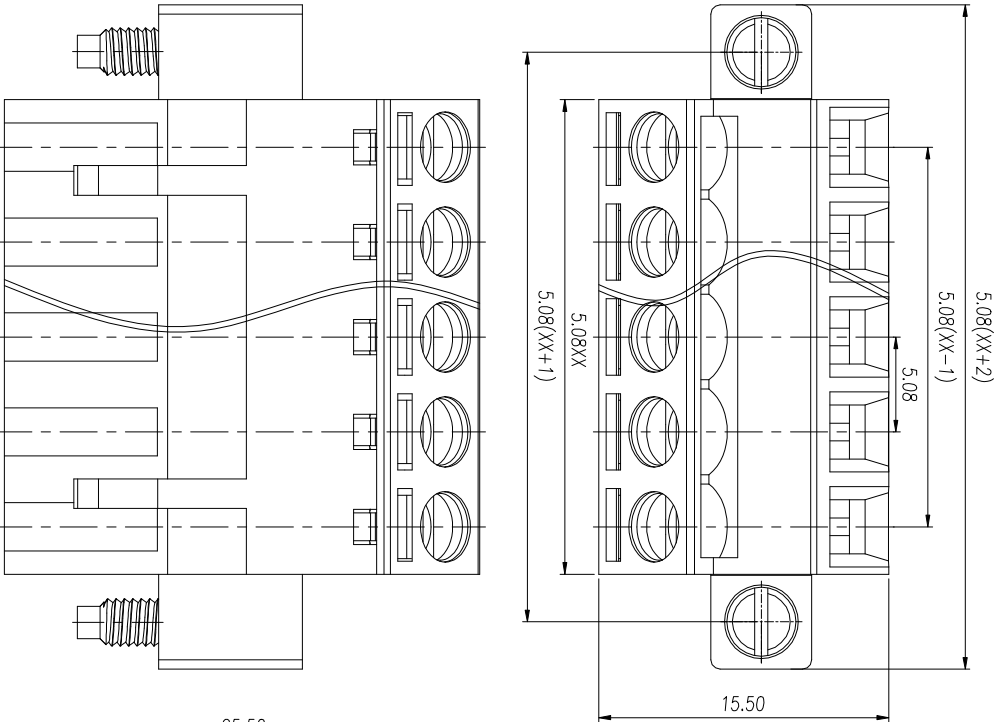

UL/CUL		cFAL [®] US			
Technical Data					
Use Group		B	C	D	
Rated Voltage	[V]	300	-	300	
Rated Current	[A]	15	-	10	
Wire Range		28-12			
Solid/Stranded	[AWG]				
Withstanding Voltage		1600V/1Min			
IEC		IEC61984			
IEC Technical Data					
Overvoltage Category		III	III	II	
Contamination Class		3	2	2	
Rated Voltage	[V]	250	320	630	
Rated Current	[A]	15	15	15	
Impulse withstand voltage	[kV]	4.0	4.0	4.0	
Conductor cross section		0.2-2.5			
Solid/ flexible	[mm ²]				
Material					
Insulation Material		PA66			
Inflammability		UL94V-0			
Contact Material		Copper alloy			
Conductive Coating		Sn Plated			
Other Data					
Pitch / Poles	[mm] / [P]	5.08 / 02-24			
Shipping Length	[mm]	7-8			
Screw/ 扭矩 Torque(Max)	[N.m]	M3/0.5			
Operating temperature	[°C]	-40~105			
Soldering temperature		-			
	[mm]	-			
PCB板孔径 PCB Hole Diameter	[mm]	-			

linear dimension(Tolerances Standard GB/T 14486-2008)											
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

UNITS		mm	SIZE	A4	SCALE	5:2	
							
CIXI WANJIE ELECTRONIC CO., LTD							
THIRD ANGLE PROJECTION						REV	V0
							
TITLE						W&EEDGKLM-5.08-XXP-1YY-00A	