



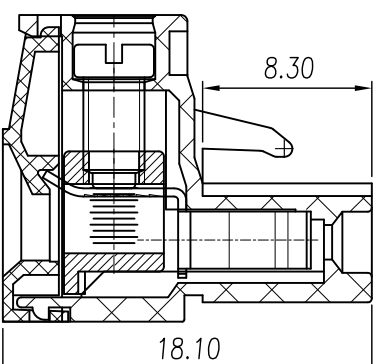

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

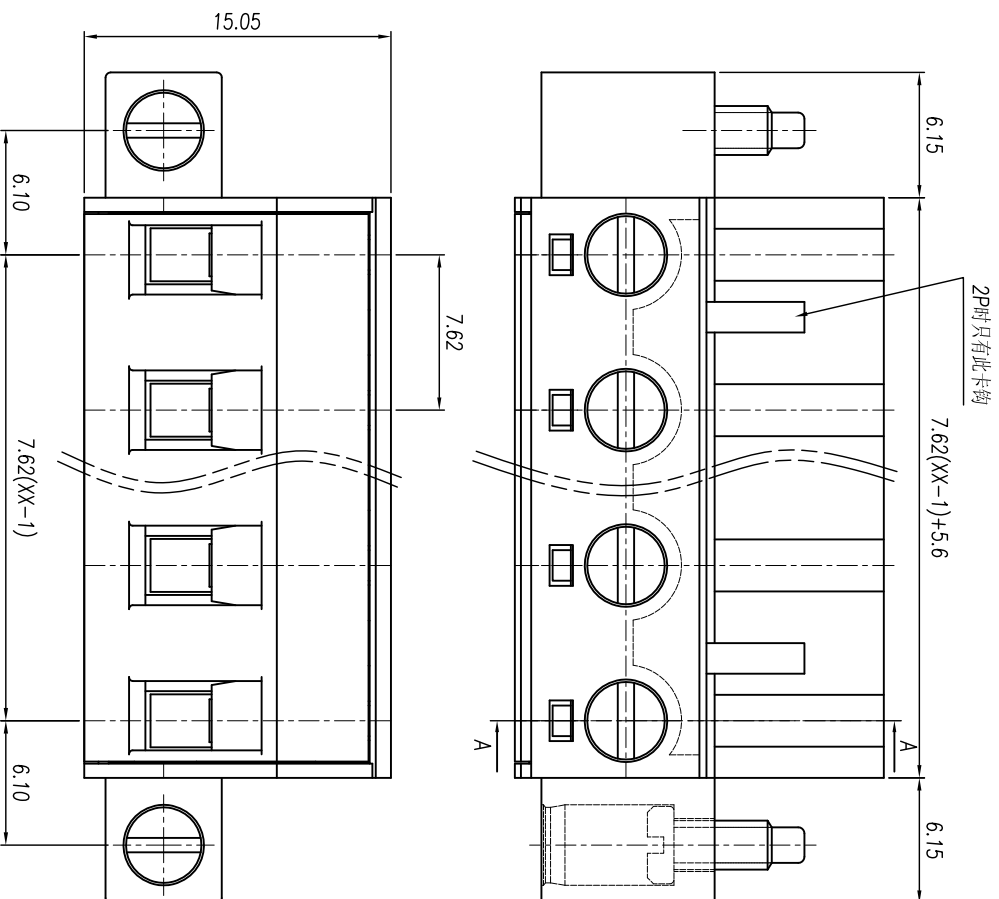

SECTION:A-A

Electrical	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 17.5A
Contact resistance	20mΩ
Insulation resistance	500MΩ /DC500V
Wire range	28~14AWG 1.5mm²
With standing voltage	AC 2000V/1 Min
Mechanical	
Torque	0.5Nm(4.5Lb.in)
Temp.Range	-40°C~+105°C
Steip Length	7-8mm
Dimensions	
Pitch	7.62mm
Poles	2~24p
Material	
Housing	PA66, UL94V-0
Screws	M3.0 Steel Zn plated
Clamp	Phosphor bronze,Ni plated
Wire guard	Brass, Ni plated
Fixing Screws	M2.5 Steel Zn plated

		linear dimension (Tolerances Standard GB/T 14486-2008)										$\equiv$	$\square$	$\parallel$	$\perp$		
		over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250		over 5 to 30	over 30 to 120	over 120 to tolerance			
variable range		6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	all to 5	5 to 30	30 to 120	120 to tolerance			
tolerance		± 0.1	± 0.14	± 0.19	± 0.25	± 0.32	± 0.43	± 0.57	± 0.72	± 0.88	± 1.05	± 1.25	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	3:1
					
					
					
TITLE					
WJ2EDGM-7.62-XXP-1YV-00A					