




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD


REV.	DESCRIPTION	ECN No.	APPROVED	DATE

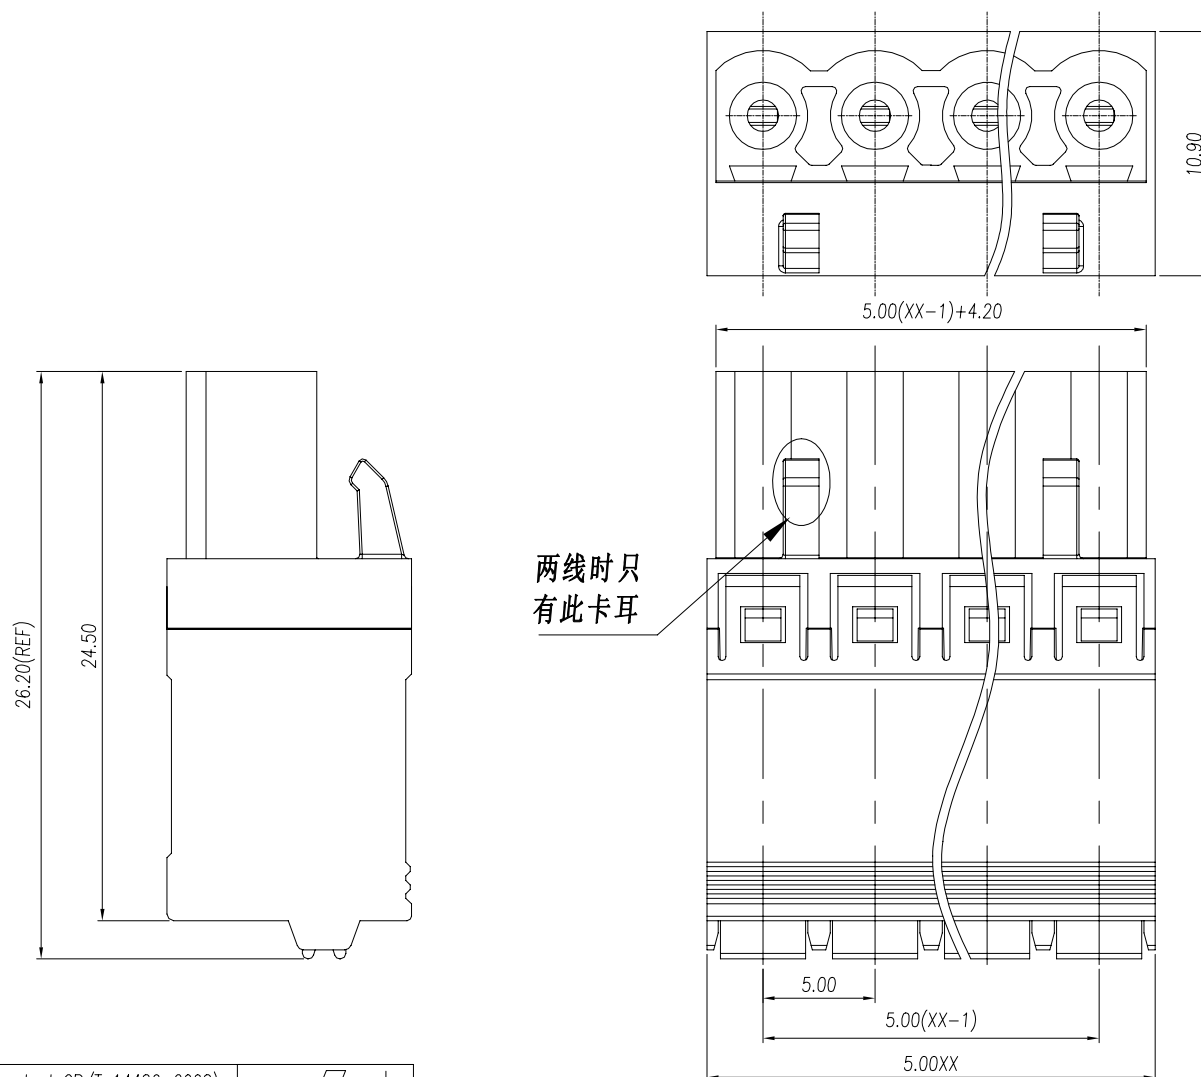

两线时只
有此卡耳

UL/CUL				
UL/CUL Technical Data				
Use Group		B	C	D
Rated Voltage	[V]	300	-	300
Rated Current	[A]	12	-	10
Wire Range		24-16		
Solid/Stranded	[AWG]			
Withstanding Voltage		1600V/1Min		
IEC		IEC61984		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压		4.0	4.0	4.0
Impulse withstand voltage	[KV]			
导线截面积	Conductor cross section	0.2-1.5/0.2-2.5		
硬质/柔性导线	Solid/ flexible [mm²]			
材 料				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数				
Other Data				
间距 Pitch /极数 Poles	[mm] / [P]	5.0 / 02-24		
剥线长度	Stripping Length [mm]	11~12		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-		
工作温度	Operating temperature [°C]	-40~105		
焊锡温度	Soldering temperature	-		
引针尺寸	Pin Dimensions [mm]	-		
PCB板孔径	PCB Hole Diameter [mm]	-		

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	WJ2EDGKN-5.0-XXP-1YY-00A	