

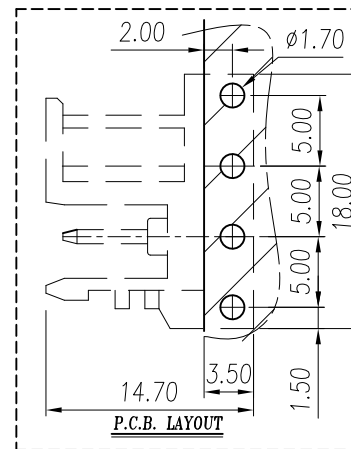


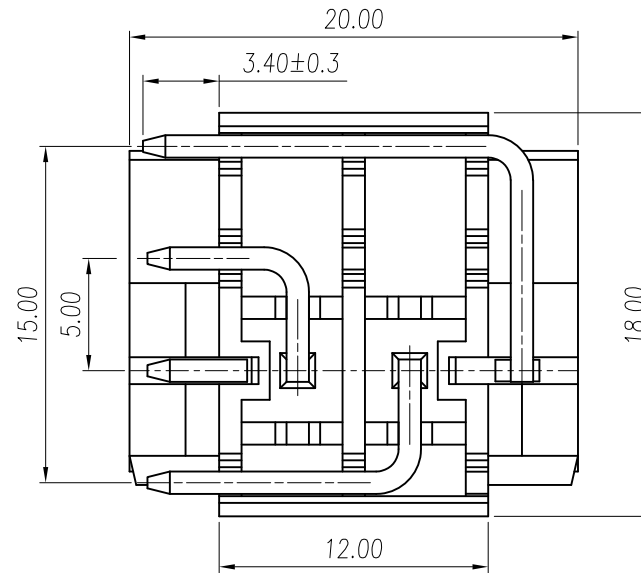

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

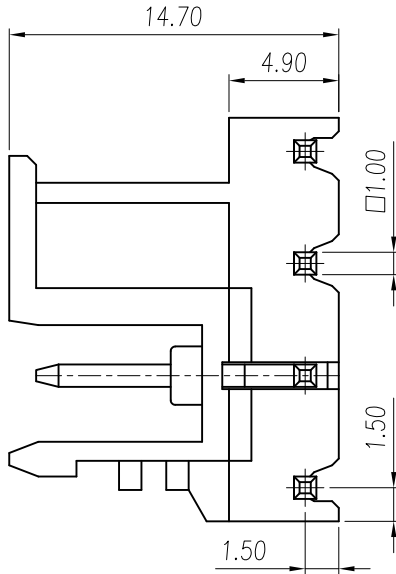

UL/CUL		cULus		
UL/CUL Technical Data				
Use Group		B	C	D
Rated Voltage [V]		300	-	300
Rated Current [A]		15	-	10
Wire Range Solid/Stranded [AWG]		-		
Withstanding Voltage		1600V/1Min		
IEC				
IEC Technical Data				
Overtoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage [V]		250	320	400
Rated Current [A]		16	16	16
Impulse withstand voltage [KV]		4.0	4.0	4.0
Conductor cross section Solid/ flexible [mm²]		-		
Material				
Insulation Material		PA66		
Imflammability		UL94V-0		
Contactor Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch / Poles [mm] / [P]		5.0 / 04P		
Stripping Length [mm]		-		
Screw/ Torque(Max) [N.m]		-		
Operating temperature [°C]		-40~105		
Soldering temperature		250°C/5S		
Pin Dimensions [mm]		1.0*1.0		
PCB Hole Diameter [mm]		Ø1.7		

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION		REV	V0
CIXI WANJIE ELECTRONIC CO., LTD						WJ2EDGLF-5.0-04P-1YY-00A			