

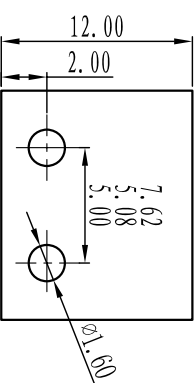


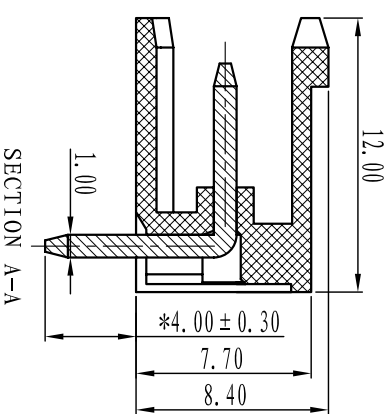

CIXI WANJIE ELECTRONIC CO., LTD

product specification

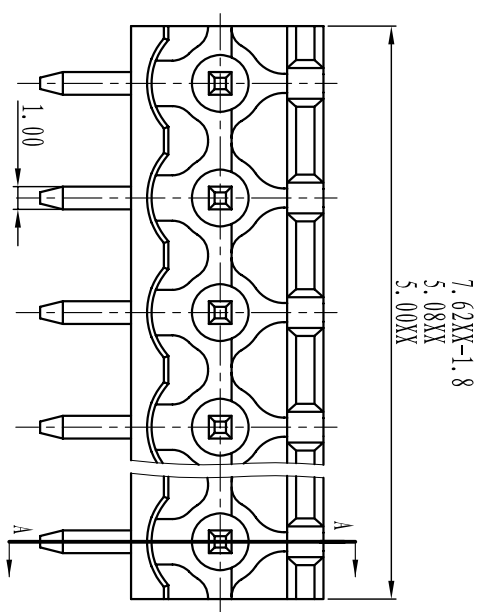

Electrical

Standard: UL IEC

Rated voltage: 250V 320V

Rated current: 10A 20A

Contact resistance: 20mΩ

Withstanding voltage: AC2000V/1Min

Insulation resistance: 5000MΩ/DC1000V

Mechanical

Temp.Range: -40° C~+105° C

MAX Soldering: +250° C, for 5 Sec

Dimensions

Pitch: 5.00mm, 5.08mm, 7.62mm

Poles: 2P-24P

Material

-housing: PA66, UL94V-0

Pin header: Brass, Tin plated

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid										
variable range	6 to	6 to	30 to	over 120 to 480	all to 6	over 6 to 10	over 10 to 50	over 50 to 120	all to 5	over 5 to 30	over 30 to 120	over 120 to 120	over 120 to 120	over 120 to 120	over 120 to 120	over 120 to 120	over 120 to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

HOW TO ORDER

Model: - - P - - -

Poles:

0 未定义/No definition
1 单间距/Sing pitch
2 双间距/Double pitch

Customer Request

灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	橙色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

UNITS: mm SIZE: A4 SCALE:

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME

WJ2EDQR-XXP-11Y-00A