

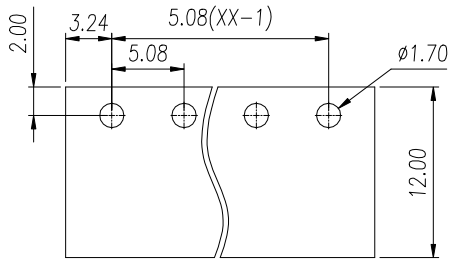
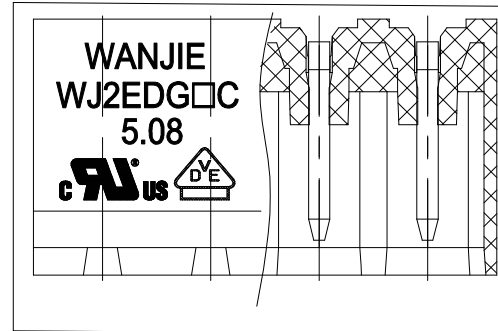
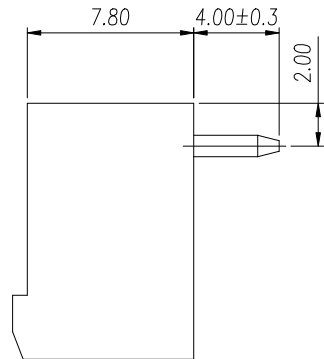


# CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

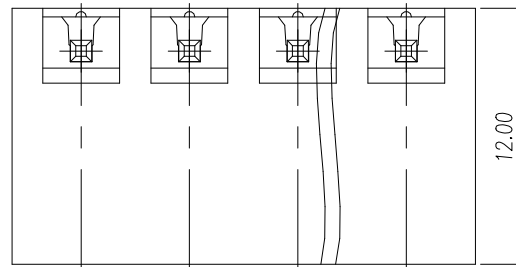

P.C.B. LAYOUT

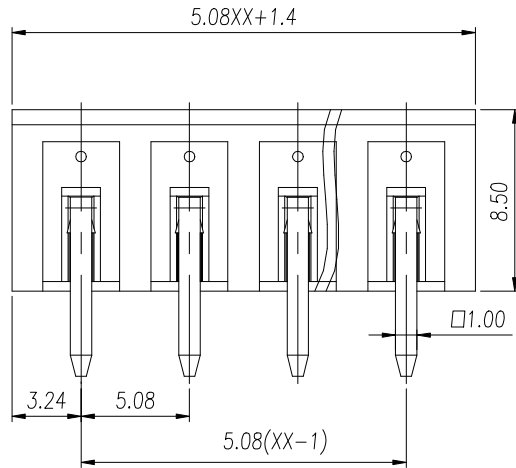

UL/CUL Technical Data			
Use Group	B	C	D
Rated Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range Solid/Stranded [AWG]	-		
Withstanding Voltage	1600V/1Min		
IEC Technical Data			
Oversoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	250	320	400
Rated Current [A]	10	10	10
Impulse withstand voltage [KV]	4.0	4.0	4.0
Conductor cross section Solid/ flexibl [mm <sup>2</sup> ]	-		
Material	PA66		
Insulation Material	PA66		
Imflammability	UL94V-0		
Contactore Material	Copper alloy		
Contactive Coating	Sn Plated		
Other Data			
Pitch / Poles [mm] / [P]	5.08 / 02-24		
Stripping Length [mm]	~		
Screw/ Torque(Max)[N.m]	-		
Operating temperature [°C]	-40~105		
Soldering temperature	260°C/5S		
引针尺寸 Pin Dimensions [mm]	1.0*1.0		
PCB板孔径 PCB Hole Diameter [mm]	Ø1.7		

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS	mm	SIZE	A4	SCALE	2:1	THIRD ANGLE PROJECTION	REV	V0
							<b>TITLE</b> WJ2EDGRC-5.08-XXP-1YY-00A	