

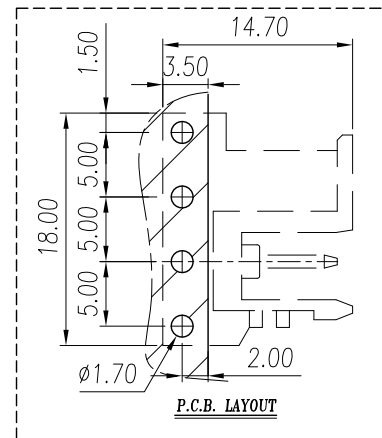


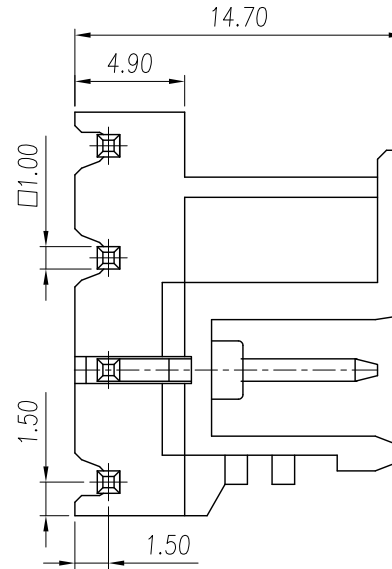

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

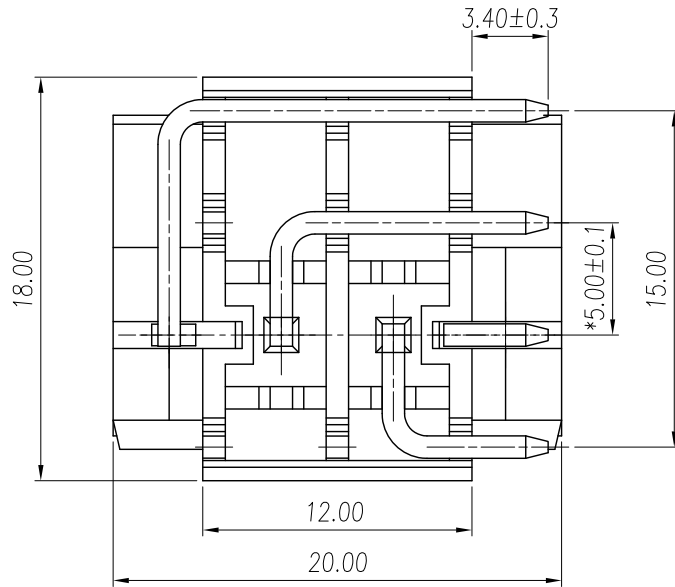

UL/CUL	cULus			
UL/CUL	Technical Data			
Use Group	B	C	D	
Rated Voltage [V]	300	-	300	
Rated Current [A]	15	-	10	
Wire Range				
Solid/Stranded [AWG]	-			
Withstanding Voltage	1600V/1Min			
IEC	IEC61984			
IEC Technical Data				
Overvoltage Category	III	III	II	
Contamination Class	3	2	2	
Rated Voltage [V]	250	320	400	
Rated Current [A]	16	16	16	
Withstand voltagea [KV]	4.0	4.0	4.0	
Conductor cross section				
Solid/ flexible [mm²]	-			
Material				
Insulation Material	PA66			
Inflammability	UL94V-0			
Contact Material	Copper alloy			
Contactive Coating	Sn Plated			
Other Data				
Pitch / Poles [mm] / [P]	5.0 / 04P			
Stripping Length [mm]	-			
Screw Torque(Max) [N.m]	-			
Operating temperatur [°C]	-40~105			
Pin Dimensions [mm]	1.0*1.0			
PCB Hole Diameter [mm]	Ø1.7			

linear dimension(Tolerances Standard GB/T 14486-2008)										—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000	to 10	over 10 to 100	over 100 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±2.00	±2.50	0.10	0.30	0.60

UNITS	mm	SIZE	A4	SCALE	3:1	THIRD ANGLE PROJECTION		REV	V0
								TITLE	WJ2EDGRF-5.0-04P-1YY-00A