




SHUI YUNPU ®

CIXI WANJIE ELECTRONIC CO., LTD

product specification

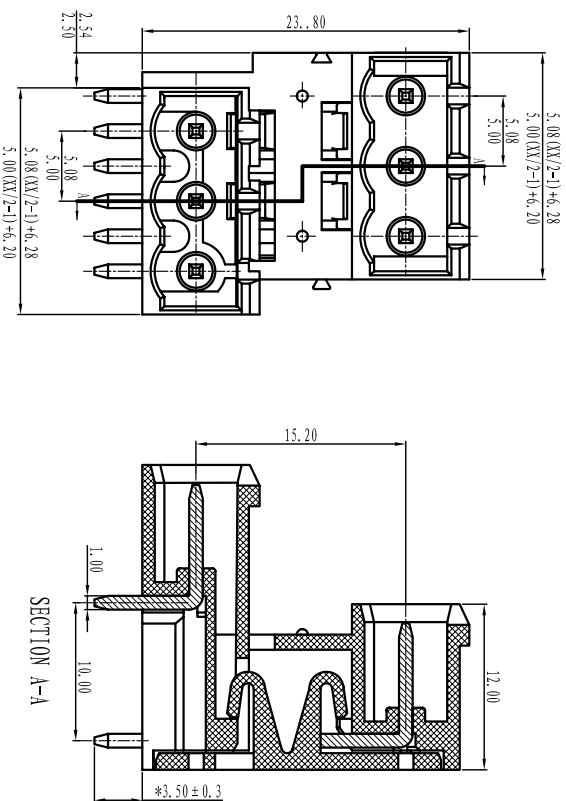

Electrical

Standard: UL IEC

Rated voltage: 300V 320V

Rated current: 15A 10A

Contact resistance: 20mΩ

Withstanding voltage: AC2000V/1Min

Insulation resistance: 5000MΩ/DC1000V

Mechanical

Temp.Range: -40° C~+105° C

MAX Soldering: +250° C, for 5 Sec

Dimensions

Pitch: 5.08mm/5.00mm

Poles: 2P~XYP

Material

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid	≡		—		□		//		⊥
variable	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
range	6	30	120	480	all	6	10	50	120	all	5	30	120	to	to	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30°	20°	10°	0.5	0.025	0.06	0.12

HOW TO ORDER

Model: - P - - -

Units: POLE

0: 未定义/No definition
1: 单插脚/Sing pinch
2: 双插脚/Double pinch

Customer Request:

灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

UNITS mm SIZE A4 SCALE

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME WJ2EDDRTC-XYP-1YV-00A