

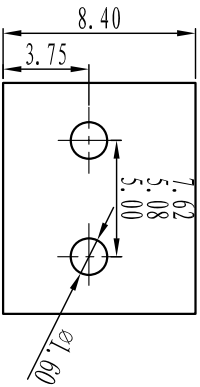


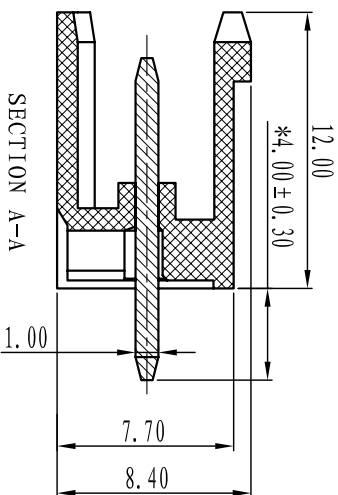

CIXI WANJIE ELECTRONIC CO., LTD

product specification

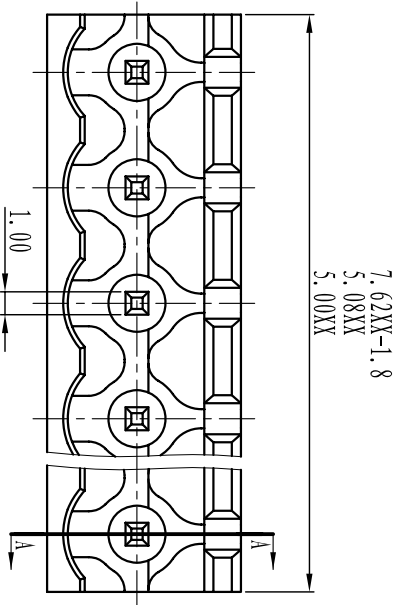

- Electrical
- Standard: UL IEC
- Rated voltage: 250V 320V
- Rated current: 10A 20A
- Contact resistance: 20mΩ
- Withstanding voltage: AC2000V/1Min
- Insulation resistance: 5000MΩ/DC1000V
- Mechanical
- Temp.Range: -40° C~+105° C
- MAX Soldering: +250° C, for 5 Sec

Dimensions

Pitch: 5.00mm, 5.08mm, 7.62mm

Poles: 2P-24P

Material

Housing: PA66, UL94V-0

Pin header: Brass, Tin plated

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid				
variable range	over 6 to 6	over 30 to 30	over 120 to 120	over 480 to 480	all to 6	over 6 to 6	over 10 to 10	over 50 to 50	over 120 to 120	all to 5	over 30 to 30
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'

HOW TO ORDER

Model: - P - -

Poles: POLE

0. 未定义/No definition
1. 单间距/Sing pitch
2. 双间距/Double pitch

Customer Request

灰色/Grey	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	WJ2ED6V-XXP-1YY-00A