

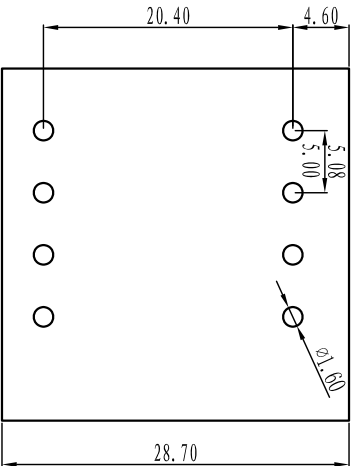


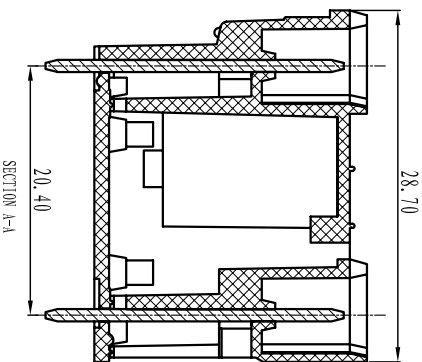

CIXI WANJIE ELECTRONIC CO., LTD

product specification

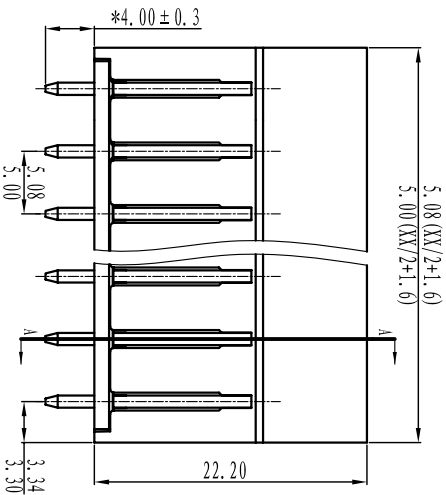

Electrical

Standard: UL IFC
Rated voltage: 300V 320V
Rated current: 15A 10A
Contact resistance: 20mΩ
Withstanding voltage: AC2000V/1Min
Insulation resistance: 5000MΩ/DC1000V

Mechanical

Temp.Range: -40° C~+105° C
MAX Soldering: +250° C, for 5 Sec

Dimensions

Pitch: 5.08mm/5.00mm
Poles: 2P-24P

Material

Housing: PA66, UL94V-0
Pin header: Brass, Tin plated

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid						
variable range	6 to 30	over 30 to 120	over 120 to 480	over 480 to 6	all to 6	over 6 to 10	over 10 to 50	over 50 to 120	all to 5	over 5 to 30	over 30 to 120	over 120 to 6	
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5 0.025 0.06 0.12 0.4

HOW TO ORDER

Model: - P - - - -

Pin pitch: (Single pitch) (Double pitch)

Customer Request:

灰色/Grey	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

UNITS mm SIZE A4 SCALE

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME

WJ2EDC7H-XP-1Y-00A