




CIXI WANJIE ELECTRONIC CO., LTD

product specification

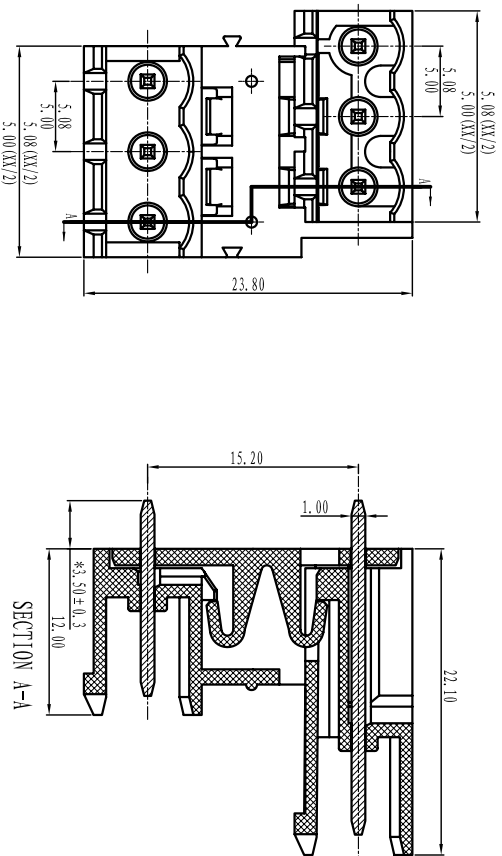

Electrical

Standard: UL IEC

Rated voltage: 300V 320V

Rated current: 15A 10A

Contact resistance: $20\text{m}\Omega$

Withstanding voltage: AC2000V/1Min

Insulation resistance: 5000M Ω /DC1000V

Mechanical

Temp.Range: $-40^{\circ}\text{C}^{\sim}+105^{\circ}\text{C}$

MAX Soldering: +250° C, for 5 Sec

Dimensions


Pitch: 5.08mm/5.00mm

Poles: $2P-XXP$


Material

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0



HOW TO ORDER

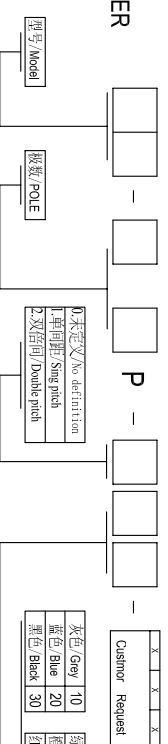

	linear dimension				fillet	chanfer	$\angle$	short angle sid	$\equiv$	—	$\square$	//	$\perp$			
	over	over	over	over		over		over	over	over	over	over	over			
variable range	6 to	30 to	120 to	480 to		6 to		10 to	50 to	120 to		5 to	30 to	120 to		
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	$\pm 1^\circ$	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

 UNITS mm SIZE A4 SCALE	FIRST ANGLE PROJECTION 	
	NAME WJ2EDC7T-XP-1YT-00A	