

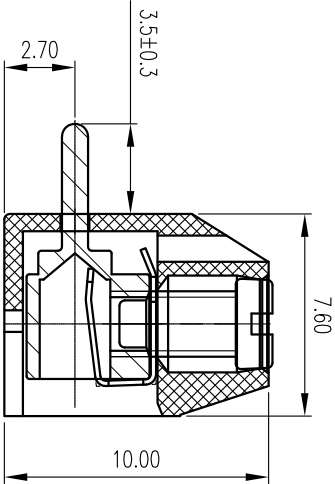
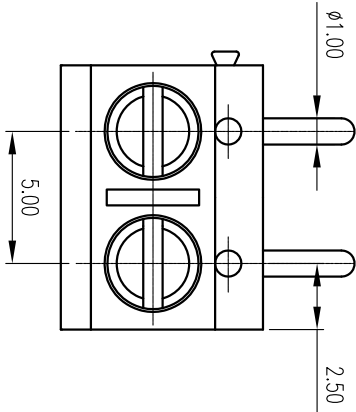


慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

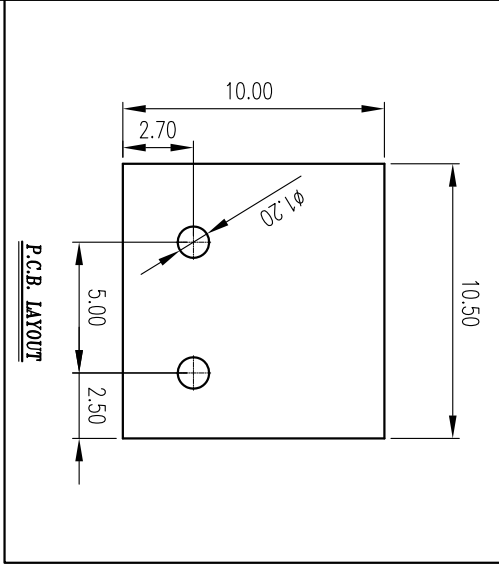

SECTION A-A

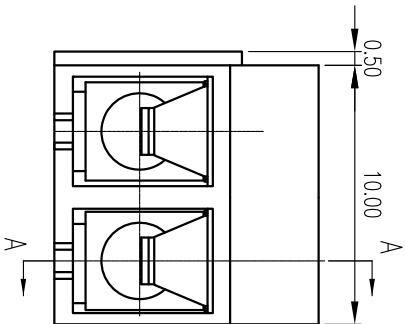

linear dimension(Tolerances Standard GB/T 14486-2008)														≡	—	□	//	⊥
	over	over	over	over	over	over	over	over	over	over	over		over	over	over			
variable range	6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	250 to all	all to 5	5 to 30	30 to 120	120 to				
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4		

电 气 性 能 / Electrical

参考标准 / Standard	UL	IEC
额定电压 / Rated voltage	250V	250V
额定电流 / Rated current	16A	17.5A
接触电阻 / Contact resistance	20mΩ	
绝缘电阻 / Insulation resistance	500MΩ / DC500V	
使用线径 / Wire range	22~14AWG	1.5mm ²
耐 电 压 / With standing voltage	AC 2000V/1 Min	

机 械 性 能 / Mechanical

扭矩 / Torque	0.4Nm(2.2lb.in)
剥线长度 / Steip Length	4.5-5mm
温度范围 / Temp.Range	-40°C~+120°C
瞬时温度 / MAX Soldering	+250°C, for 5 Sec

尺 寸 / Dimensions

间 距 / Pitch	5.0mm
极 数 / Poles	02p

材 质 及 电 镀 / Material

塑 件 / Housing	PA66, UL94V-0
螺 丝 / Screws	M2.5, Steel Zn plated
焊 脚 / Pin header	Copper alloy, Sn plated
弹片 / Shrapnel	Phosphor bronze, Ni plated



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 /
TITLE
WJ301R-5.0-02P-1YY-00A



第三视角 / THIRD ANGLE PROJECTION