




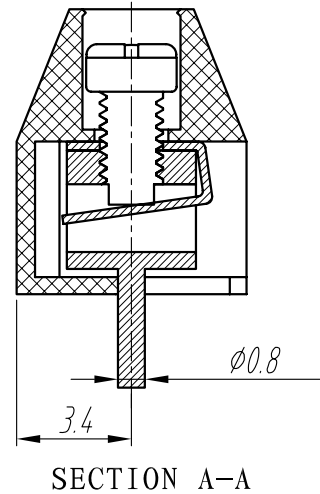

CIXI WANJIE ELECTRONIC CO., LTD

product specification

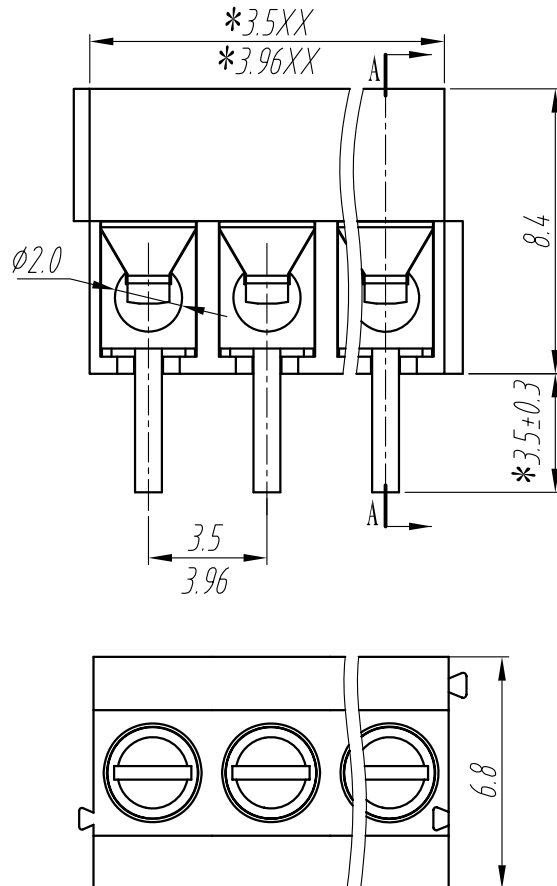

Electrical

Standard	UL	IEC
Rated voltage	125V	130V
Rated current	10A	10A
Contact resistance	20mΩ	
Insulation resistance	5000MΩ/DC1000 V	
Wire range	24-18A WG 1.0mm ²	
Withstanding voltage	AC 2000V/1 Min	

Mechanical

Temp.Range	-40℃~+105℃
MAX Soldering	+250℃ for 5 Sec
Torque	0.2Nm(1.7lb.in)
Strip length	4.5-5mm

Dimensions


Pitch	3.5mm, 3.96mm
Poles	2p. xxp

Material

Housing	PA66,UL94 V-0
Screws	M2 steel Zinc plated
Pin housing	Brass,Tin plated
Wire guard	Phosphor bronze, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	short angle sid	≡	—	□	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	to 6	over 6 to 10	to 10 to 30'	to 30' to 120'	to 120' to 10'	to 10' to 5	to 5 to 30	to 30 to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
 CIXI WANJIE ELECTRONIC CO., LTD						
					NAME	WJ350-3.50 WJ396-3.96