



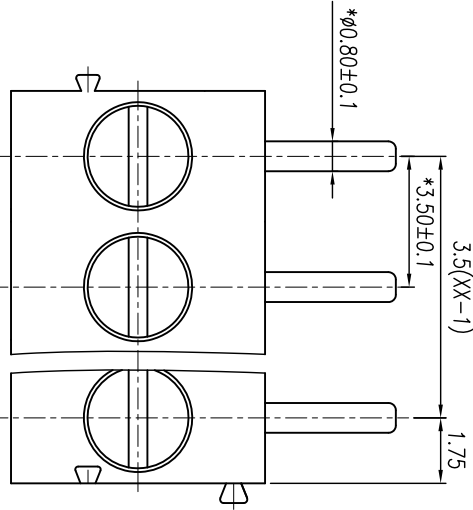

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

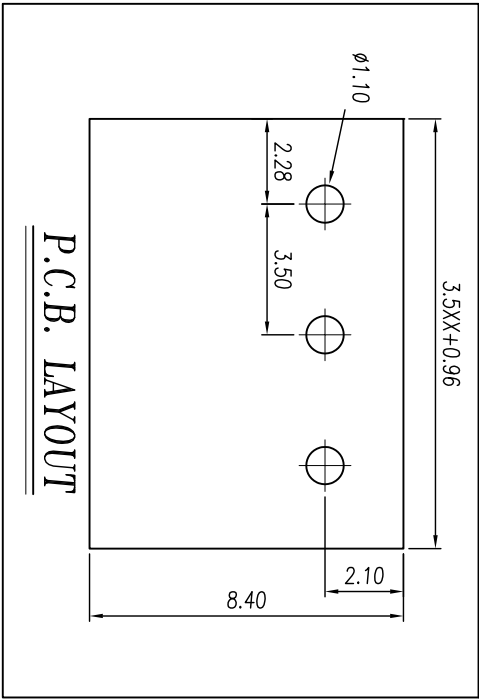

Electrical

Standard	UL	IEC
Rated voltage	125V	250V
Rated current	10A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	24~18AWG	0.75mm²
Wrth standing voltage	AC 2000V/1 Min	

Mechanical



Torque	0.2Nm(1.77Lb.in)
Steip Length	4.5-5mm
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C, for 5 Sec

Dimensions

Pitch	3.5mm
Poles	2~24p

Material

Housing	PA66, UL94V-0
Screws	M2.0 Steel Zn plated
Pin header	Brass, Tin plated
Shrapnel	Phosphor bronze,Ni plated

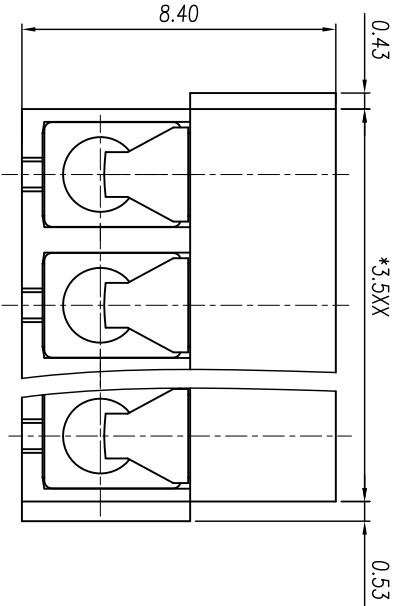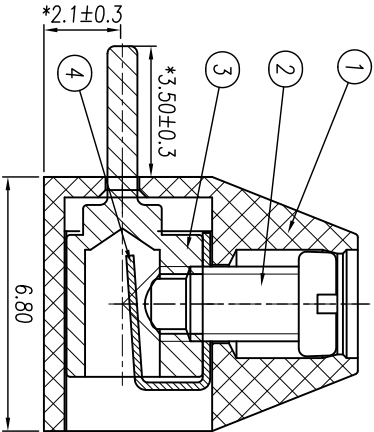

linear dimension(Tolerances Standard GB/T 14486-2008)													
	over	over	over	over	over	over	over	over	over	over	over	over	over
variable range	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all	5 to	5 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025

UNITS	mm	SIZE	A4	SCALE	6:1	THRD ANGLE PROJECTION	
CIXI WANJIE ELECTRONIC CO., LTD						TITLE	WJ350R-3.5-XXP-1YY-00A