



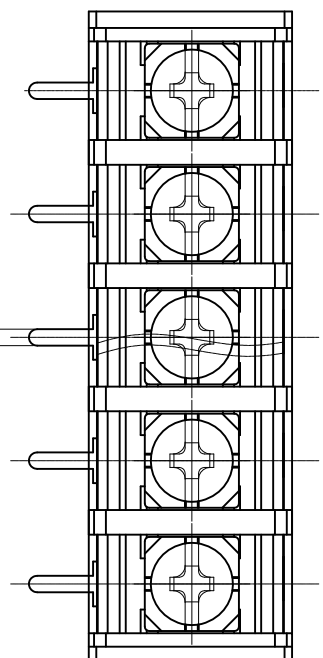

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

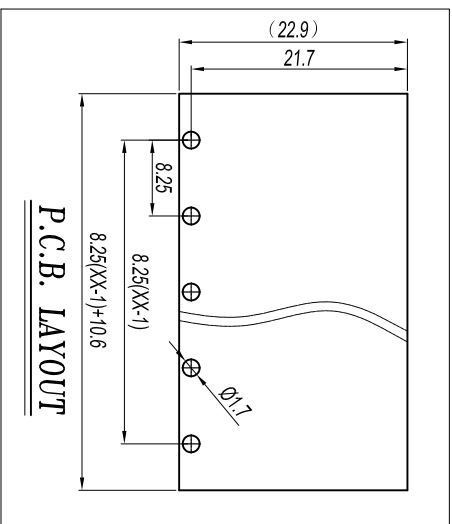

Electrical	
Standard	UL
Rated voltage	300V
Rated current	15A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wire range	22~14AWG
Wrth standing voltage	AC 2000V/1 Min

Mechanical



Torque	0.5Nm(4.5Lb.in)
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C, for 5 Sec

Dimensions

Pitch	8.25mm
Poles	2~22p

Material

Housing	PA66, UL94V-0
Screws	M3.0 Steel Ni plated
Pin header	Brass 0.8t Tin plated
Cover	PC,UL94V-2

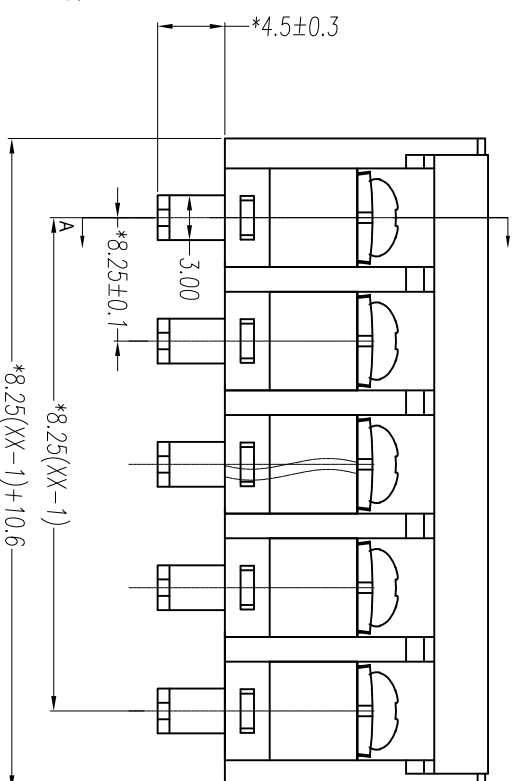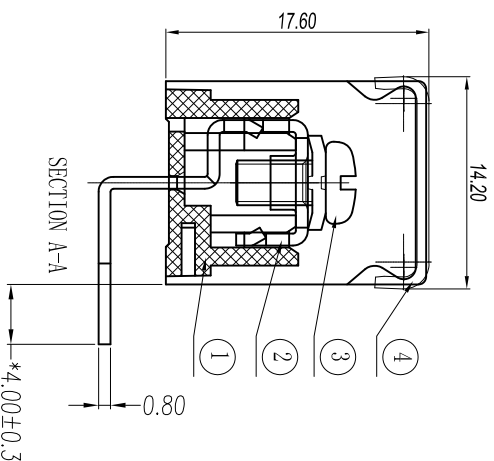

linear dimension(Tolerances Standard GB/T 14486--2008)														
	over	over	over	over	over	over	over	over	over	over	over	over	over	over
variable range	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all	5 to	30 to	120 to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06

UNITS	mm	SIZE	A4	SCALE	2:1
CIXI WANJIE ELECTRONIC CO., LTD					

TITLE	THIRD ANGLE PROJECTION
WJ38R-XXP-1YY-00A	