

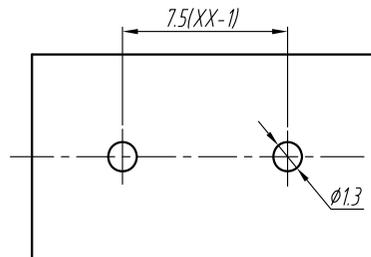
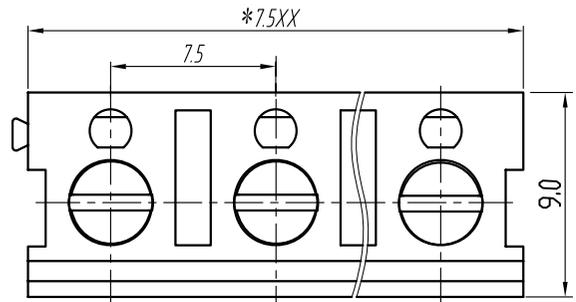


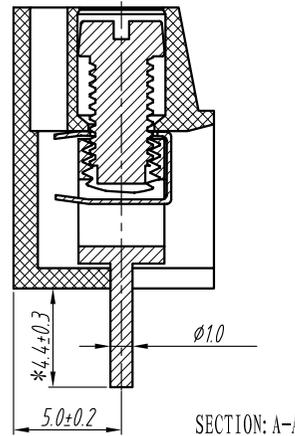

CIXI WANJIE ELECTRONIC CO., LTD

product specification

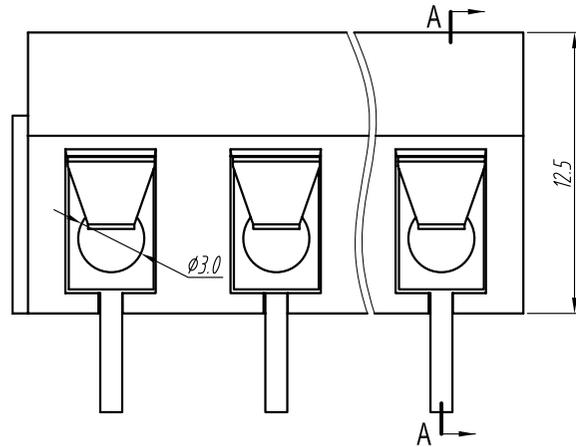

Electrical

| | | |
|-----------------------|------------------------------|------|
| Standard | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 15A | 24A |
| Contact resistance | 20mΩ | |
| Insulation resistance | 5000MΩ/DC1000V | |
| Wire range | 22-14 AWG 2.5mm ² | |
| Withstanding voltage | AC 2000V/1 Min | |

Mechanical

| | |
|---------------|-----------------|
| Temp.Range | -30℃ ~ +120℃ |
| MAX Soldering | +250℃ for 5 Sec |
| Torque | 0.5Nm(4.5lb.in) |
| Strip length | 4.5-5mm |

Dimensions

| | |
|-------|----------------|
| Pitch | 7.5mm , 15.0mm |
| Poles | 2p. xxp |

Material

| | |
|-------------|----------------------------|
| Housing | PA66,UL94V-0 |
| Screws | M3 steel Zinc plated |
| Pin housing | Brass,Tin plated |
| Wire guard | Phosphor bronze, Ni plated |

TOLERANCES EXCEPT AS NOTED

| | linear dimension | | | | fillet | chamfer | ∠ short angle sid | | | | ≡ | - | □ | // | ⊥ | |
|-----------|------------------|-------|--------|--------|--------|---------|-------------------|-------|--------|------|------|-------|--------|------|-------|-------|
| | over | over | over | over | | | over | over | over | over | | | | | | |
| variable | 6 | 30 | 120 | 480 | all | to 6 | to 10 | to 50 | to 120 | all | to 5 | to 30 | to 120 | to | | |
| range | to 6 | to 30 | to 120 | to 480 | | | | | | | | | | | to 10 | to 50 |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.2 | ±0.5 | ±1 | 1° | 30' | 20' | 10' | 0.5 | 0.025 | 0.06 | 0.12 | 0.4 |

| | | | | | | |
|---------------------------------|----|------|----|-------|------------------------|-----------|
| UNITS | mm | SIZE | A4 | SCALE | FIRST ANGLE PROJECTION | |
| CIXI WANJIE ELECTRONIC CO., LTD | | | | | | |
| | | | | | NAME | WJ370-7.5 |