




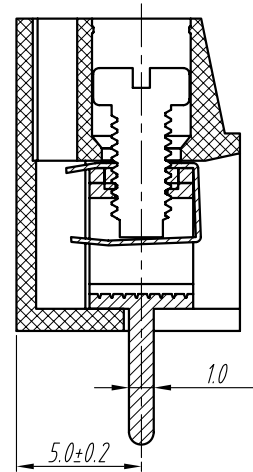


CIXI WANJIE ELECTRONIC CO., LTD

product specification

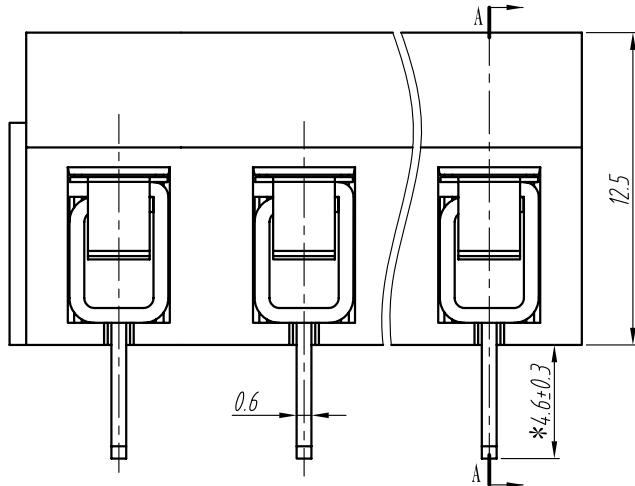

SECTION A-A

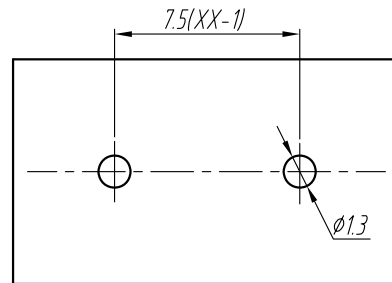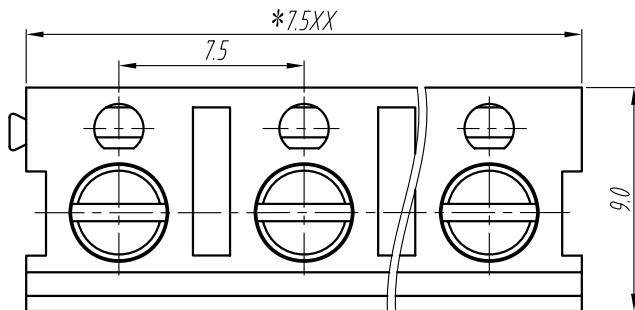

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Contact resistance	20mΩ	
Insulation resistance	5000MΩ/DC1000V	
Wire range	22-14 A WG	2.5mm ²
Withstanding voltage	AC 2000V/1 Min	

Mechanical

Temp.Range	-30℃~+120℃
MAX Soldering	+250℃ for 5 Sec
Torque	0.5Nm(4.5lb .in)
Strip length	4.5-5mm

Dimensions

Pitch	7.5mm , 15.0mm
Poles	2p. xpx

Material

Housing	PA66,UL94V-0
Screws	M3 steel Zinc plated
Pin housing	Brass,Tin plated
Wire guard	Phosphor bronze, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid				≡	—	□	//	⊥
variable	over	over	over	over		over	over	over	over		over	over	over	over	over
range	6	30	120	480	all	6	10	50	120	all	5	30	120	120	120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12

UNITS


mm

SIZE

A4

SCALE

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME

WJ375-7.5