

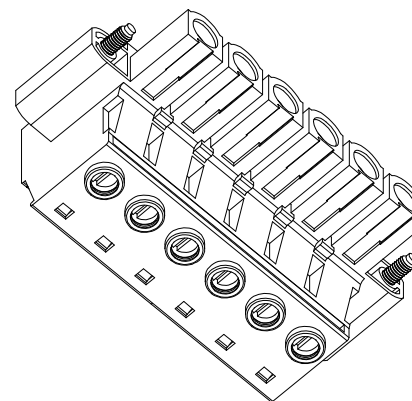


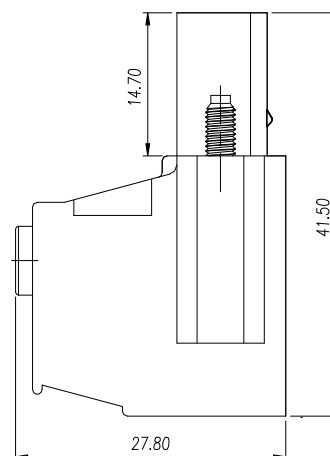

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

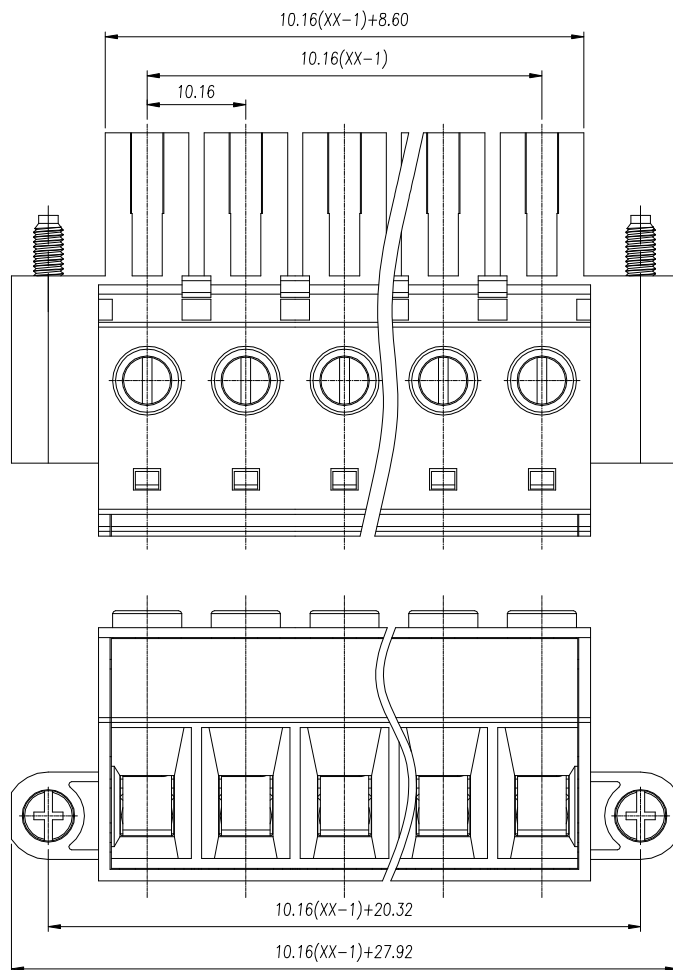

UL/CUL		cUL [®] us		
UL/CUL Technical Data				
Use Group		B	C	D
Rated Voltage	[V]	600	600	600
Rated Current	[A]	55	55	5
Wire Range		20-6		
Solid/Stranded	[AWG]			
Withstanding Voltage		2200V/1Min		
IEC		IEC61984		
IEC Technical Data				
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage	[V]	1000	1000	1000
Rated Current	[A]	76	76	76
Impulse withstand voltage	[KV]	8.0	8.0	6.0
Conductor cross section		0.5-16		
Solid/ flexible	[mm ²]			
Material				
Insulation Material		PA66		
Imflammability		UL94V-0		
Contactor Material		铜合金 Copper alloy		
Contactive Coating		镀锡 Sn Plated		
Other Data				
Poles [mm] / [P]		10.16 / 02~18		
Stripping Length [mm]		13-14		
Screw/ Torque(Max)	[N.m]	M4/1.2		
Operating temperature [°C]		-40~105		
Soldering temperature		-		
		[mm]		
PCB Hole Diameter [mm]		-		


linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 60
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

UNITS mm SIZE A4 SCALE 1:3.1

/THIRD ANGLE PROJECTION



REV V0



CIXI WANJIE ELECTRONIC CO., LTD

TITLE

WJ3EDGKM-10.16-XXP-1YY-00A