








慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书

THE SPEC SHEET

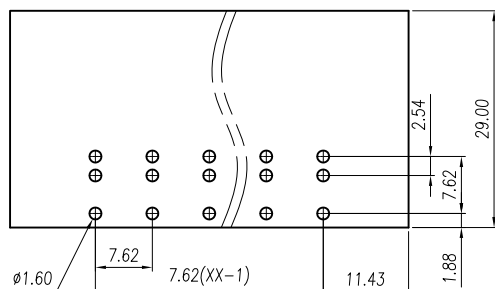

P.C.B. LAYOUT

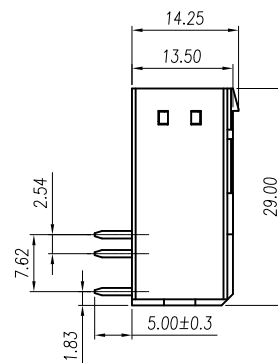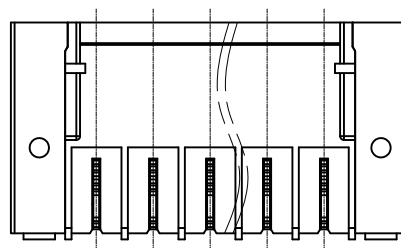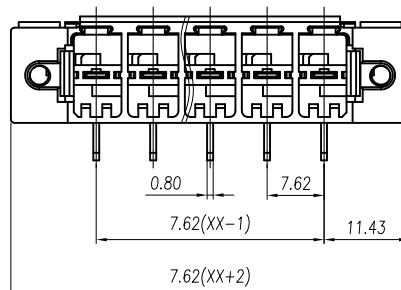

UL/CUL	技术 参数			
UL/CUL	Technical Data			
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	41	41	10
接线范围	Wire Range	-		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数		IEC61984		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	630	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltagea [KV]	6	6	6
导线截面积	Conductor cross section	-		
硬质/柔性导线	Solid/ flexible [mm ²]			
材 料	Material			
绝缘材料	Insulation Material	PA		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contactor Material	铜合金 Copper alloy		
导体镀层	Contactive Coating	镀锡 Sn Plated		
一般参数		Other Data		
间距	Pitch [mm]	7.62		
极数	Poles [P]	02~12P		
剥线长度	Stripping Length [mm]	-		
螺丝	Screw	-		
扭矩	Torque(Max) [N.m]	-		
工作温度	Operating temperatur [°C]	-40~105		

	linear dimension(Tolerances Standard GB/T 14486-2008)											≡	—		//	
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE WJ3EDGRHM-7.62-XXP-1YY-00A