








CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

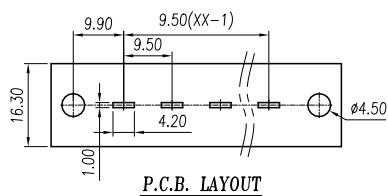

P.C.B. LAYOUT

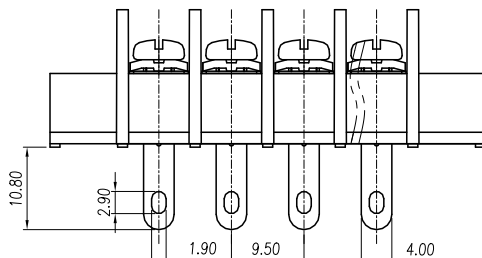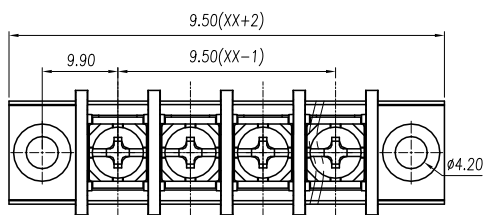

Electrical

Rated voltage	300V
Rated current	20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wire range	22~12AWG
Wrth standing voltage	AC1600V/1 Min

Mechanical

Torque	1.2Nm(10.6Lb.in)
Temp.Range	-40°C~+105°C
MAX Soldering	+260°C, for 5 Sec

Dimensions

Pitch	9.5mm
/Poles	2~22P

Material

Housing	PA66, UL94V-0
Screws	M4.0 Steel Ni plated
Pin header	Copper alloy, Sn plated

linear dimension(Tolerances Standard GB/T 14486-2008)										—	□	⊥
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

UNITS	mm	SIZE	A4	SCALE	1:5	THIRD ANGLE PROJECTION	REV	V0
 CIXI WANJIE ELECTRONIC CO., LTD							TITLE	WJ45HM-XXP-1YY-00A