







CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

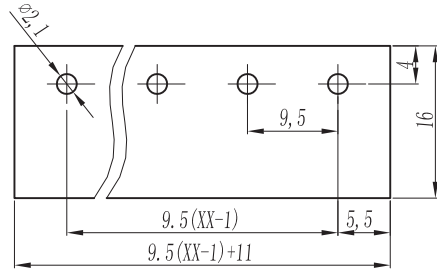

P.C.B. LAYOUT

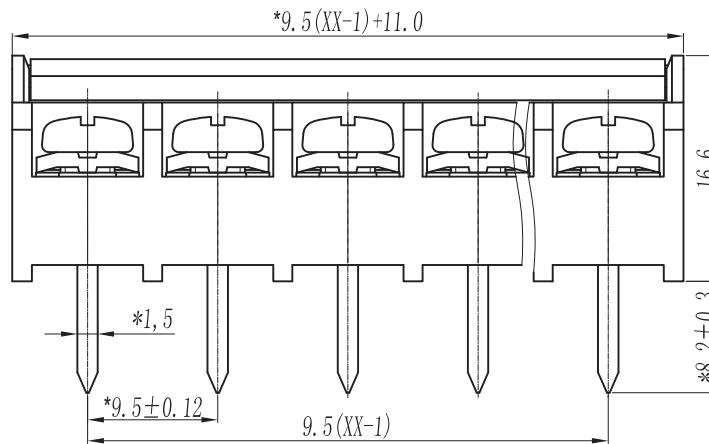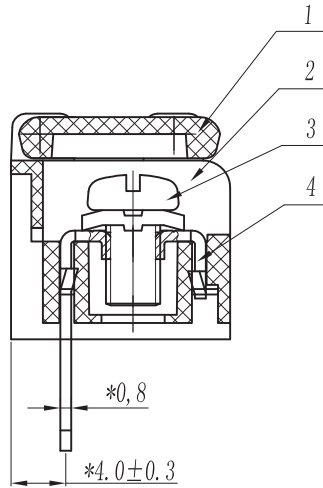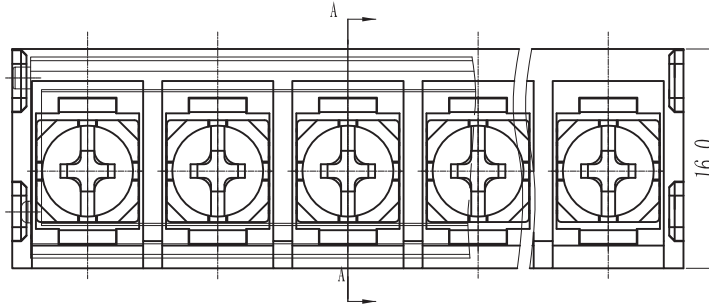

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	20A	24A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	22~12AWG	2.5mm ²
Wrth standing voltage	AC 2000V/1 Min	

Mechanical

Torque	1.2Nm(10.6Lb.in)
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C, for 5 Sec

Dimensions

Pitch	9.5mm
Poles	2~12p

Material


Housing	PA66, UL94V-0
Screws	M4.0 Steel Ni plated
Pin header	Brass 0.8t Tin plated
Cover	PC,UL94V-2

		linear dimension(Tolerances Standard GB/T 14486-2008)										≡		—		□		//		⊥	
variable range	to 6	over 6	over 10	over 18	over 30	over 50	over 80	over 120	over 160	over 200	over 250	all		to 5	over 5	over 30	over 120	to to	to	to	
		to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250					to 30	to 120	to	to			
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025		0.06	0.12	0.4				



CIXI WANJIE ELECTRONIC CO., LTD

THIRD ANGLE PROJECTION



TITLE WJ46G-XXP-1YY-00A