



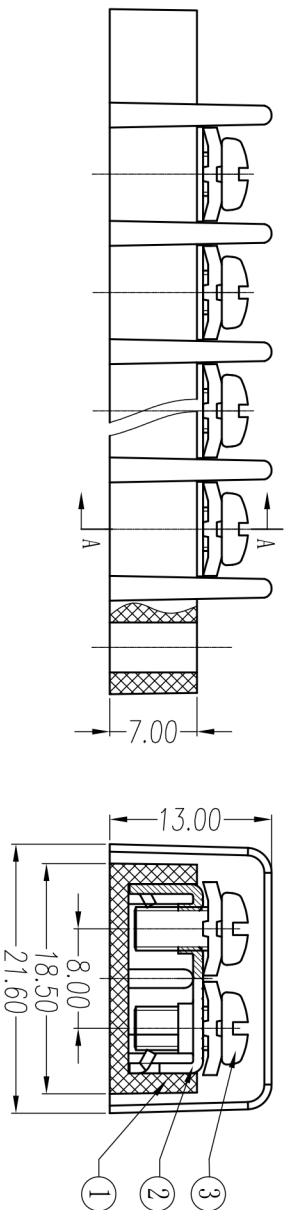

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

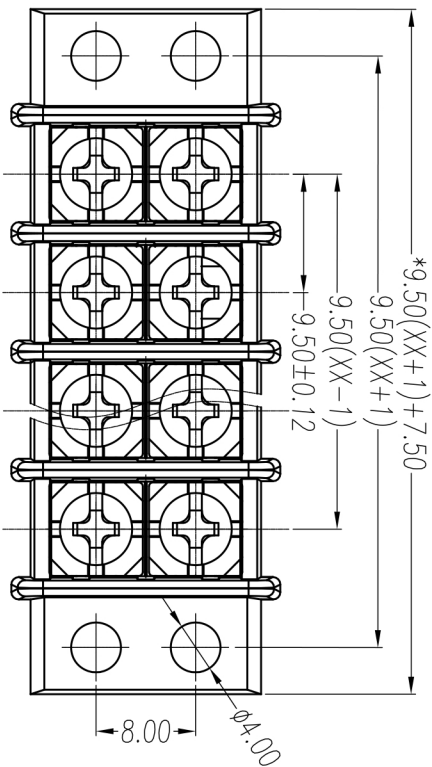

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	24A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	22~12AWG	2.5mm ²
With standing voltage	AC 2000V/1 Min	

Mechanical

Torque	0.8Nm(7.11Lb.in)
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C, for 5 Sec
Dimensions	
Pitch	9.5mm
Poles	2~26p
Material	PA66, UL94V-0
Housing	M3.5 Steel Ni plated
Screws	Brass 0.8t Tin plated
Pin header	

linear dimension(Tolerances Standard GB/T 14486-2008)											
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25
variable range	6 to 6	6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	250 to 250
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25



CIXI WANJIE ELECTRONIC CO., LTD

WJ49M-2*XXP-1YY-00A