

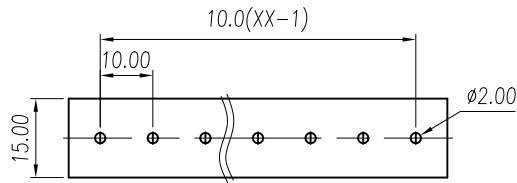


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担侵权责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

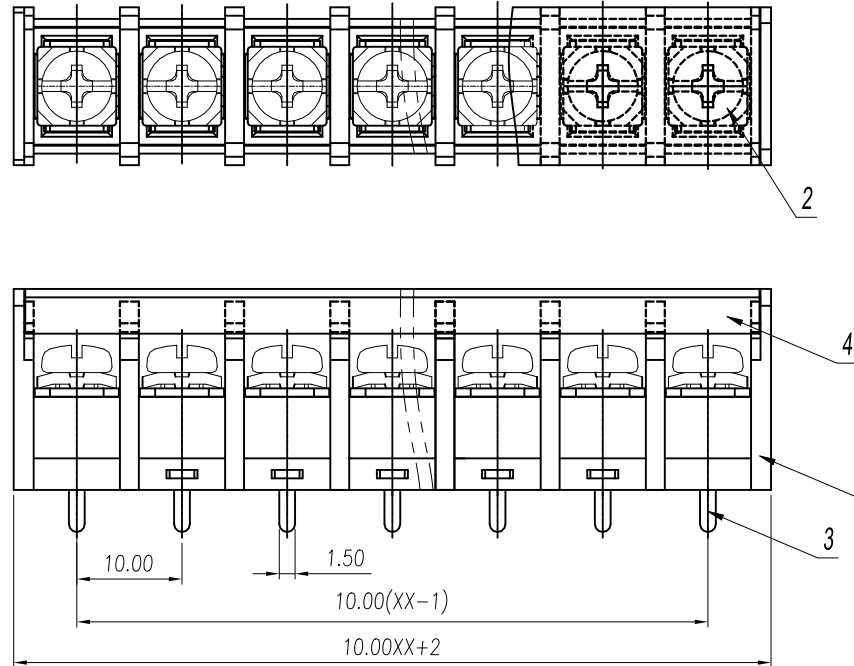

P.C.B. LAYOUT

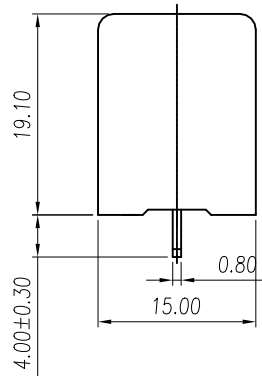

/Electrical	
/Rated voltage	300V
/Rated current	20A
/Contact resistance	20mΩ
/Insulation resistance	500MΩ/DC500V
/Wire range	22~12AWG
/With standing voltage	AC 1600V/1 Min
/Mechanica	
/Torque	1.2Nm(10.6Lb.in)
/Temp.Range	-40°C~+105°C
/MAX Soldering	+260°C, for 5 Sec
/Dimensions	
距/Pitch	10.0mm
/Poles	2~24p

4	Cover	PC	UL94V-2
3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ58C-XXP-1Y-00A	

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60