

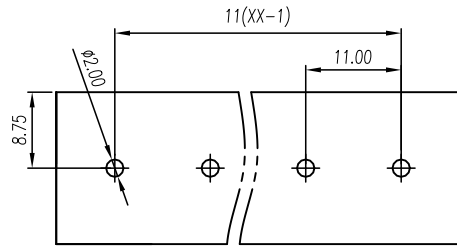
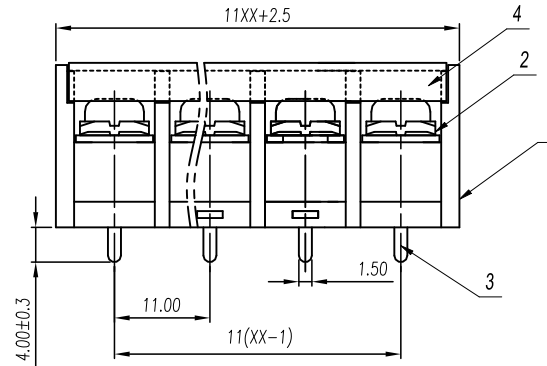


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非給予明確授權，否則禁止轉讓、複製、利用、交流本文档的内容。 侵權者將負賠償責任。 本公司保留對涉及發明、實用新穎和外觀設計的所有權利。

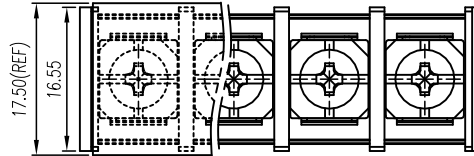

P.C.B. LAYOUT



REVISION RECORD

REV.	ESCRPTION	ECN No.	APPROVED	DATE
V0			ZhaoXY	24.04.01

/Electrical	
/Rated voltage	300V
/Rated current	20A
/Contact resistance	20mΩ
/Insulation resistance	500MΩ/DC500V
/Wire range	22~12AWG
/With standing voltage	AC 1600V/1 Min
/Mechanica	
/Torque	1.2Nm(10.6Lb.in)
/Temp.Range	-40°C~+105°C
/MAX Soldering	+260°C, for 5 Sec
/Dimensions	
/Pitch	11mm
/Poles	2~22p

4	Cover	PC	UL94V-2
3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1



CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ68C-XXP-1Y-00A

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60