


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations.

除经书面明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯专利等侵权责任，使用者和复制者均须承担。实用型专利和外观设计专利的权利。

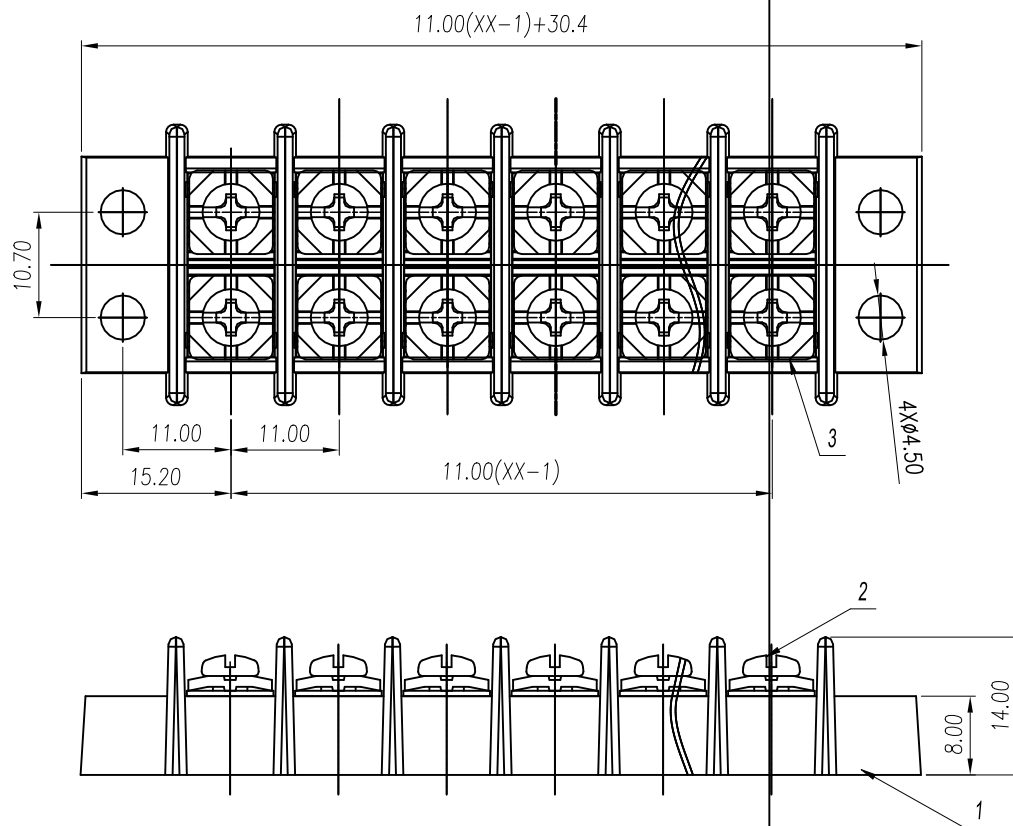

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

/Electrical	
/Rated voltage	300V
/Rated current	25A
/Contact resistance	20mΩ
/Insulation resistance	500MΩ/DC500V
/Wire range	22~12AWG
/With standing voltage	AC 1600V/1 Min
/Mechanica	
/Torque	0.8Nm(7.0Lb.in)
/Temp.Range	-40°C~+105°C
/MAX Soldering	+260°C, for 5 Sec
/Dimensions	
/Pitch	11mm
/Poles	2~26p

3	current-carrying part	Copper Alloy	Ni Plated
2	Screws	Steel	M3.5 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV	V1
 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ69M-XXP-1Y-00A		

FOR-0371 Rev.1.0