

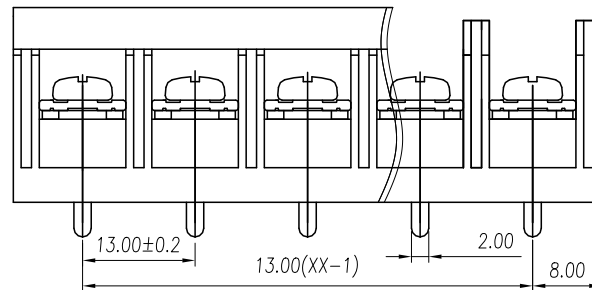
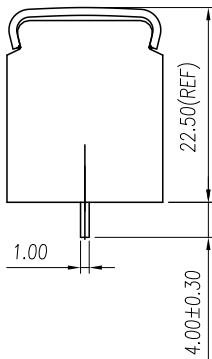


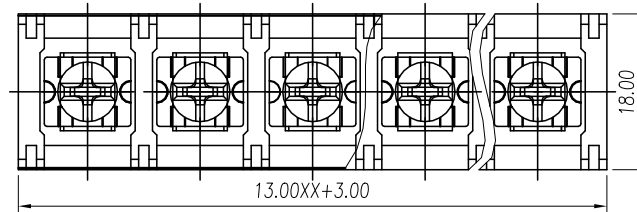

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

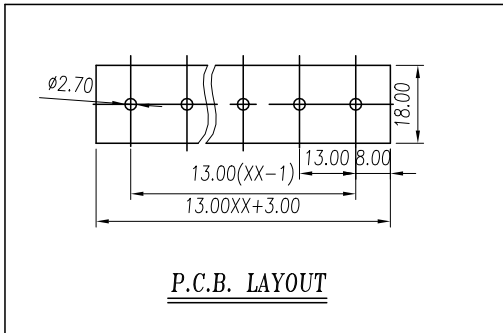

- Electrical**
- Rated voltage: 600V
 - Rated current: 40A
 - Contact resistance: 20mΩ
 - Insulation resistance: 500MΩ/DC500V
 - Wire range: 18~10AWG
 - Wrth standing voltage: AC 2200V/1 Min

- Mechanical**
- Torque: 1.2Nm(10.6Lb.in)
 - Temp.Range: -40°C~+105°C
 - /MAX Soldering: +260°C, for 5 Sec

- Dimensions**
- Pitch: 13mm
 - /Poles: 2~20p

- Material**
- Housing: PA66, UL94V-0
 - Screws: M4.0 Steel Ni plated
 - Pin header: Copper alloy 1.0t Sn plated
 - Cover: PC,UL94V-2

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS	mm	SIZE	A4	SCALE	1:1	THIRD ANGLE PROJECTION		REV	V0
								TITLE	WJ78C-XXP-1YY-00A