




Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations.
除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担赔偿责任。本公司保留所有专利及发明权、实用新型和外观设计权。

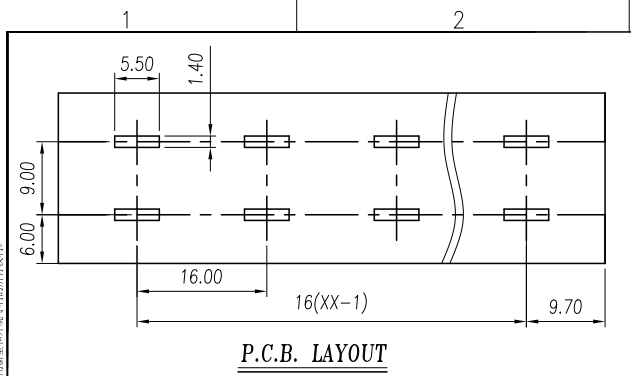

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

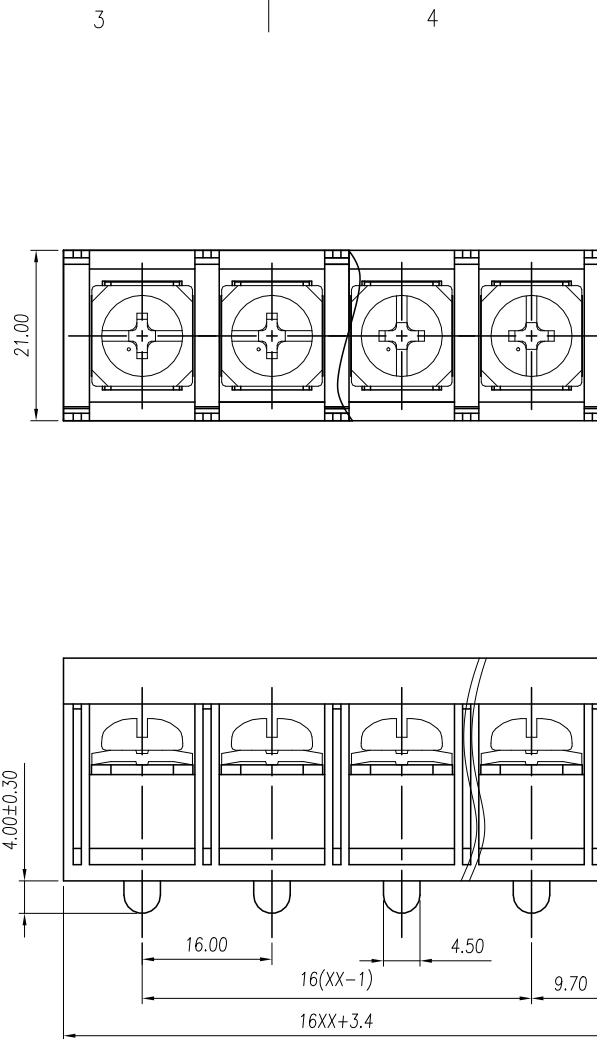

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0			ZhaoXY	24.04.01

/Rated voltage	600V
/Rated current	100A
/Contact resistance	20mΩ
/Insulation resistance	500MΩ/DC500V
/Wire range	14~3AWG
/With standing voltage	AC 2200V/1 Min
/Mechanica	
/Torque	3.0Nm(26Lb.in)
/Temp.Range	-30°C~+120°C
/MAX Soldering	+260°C, for 5 Sec
尺寸/Dimensions	
/Pitch	16mm
/Poles	2~16p

5	Nut	Steel	M6 Steel Zn plated
4	Cover	PC	UL94V-2
3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M6 Steel Zn plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	⌀ ▯
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ88-XXP-1Y-00A	

FOR-0371 Rev.1.0