

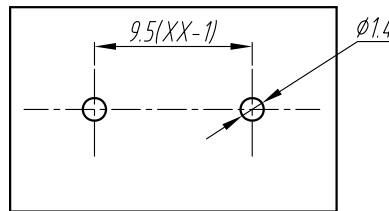
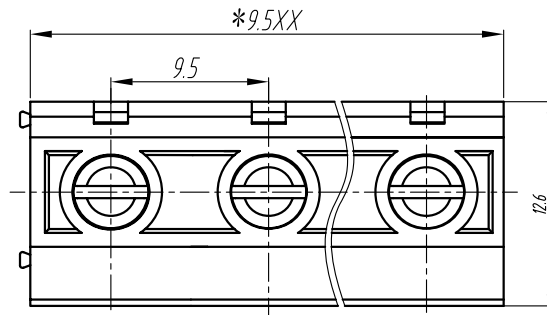


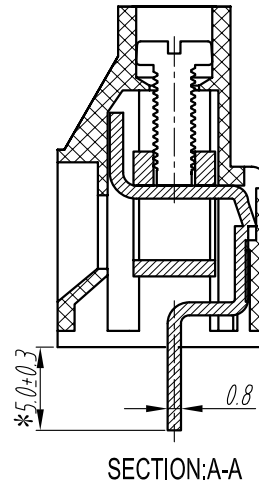

CIXI WANJIE ELECTRONIC CO., LTD

product specification

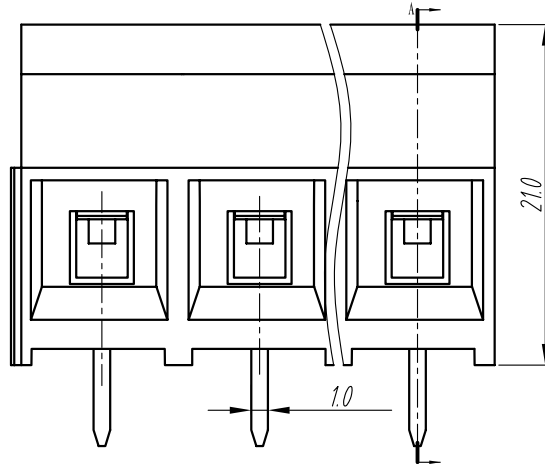

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	30A	35A
Contact resistance	20mΩ	
Insulation resistance	5000MΩ/DC1000V	
Wire range	26-10A WG 6.0mm ²	
Withstanding voltage	AC 2000V/1 Min	

Mechanical

Temp.Range	-40℃ ~+105℃
MAX Soldering	+250℃ for 5 Sec
Torque	0.5Nm(4.5lb .in)
Strip length	6-7mm

Dimensions

Pitch	9.5mm
Poles	2p. xxp

Material

Housing	PA66,UL94V-0
Screws	M3 steel Zinc plated
Pin housing	Brass,Tin plated
Clamp	Brass, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer			short angle sid			≡	—			
variable range		over 6	over 30	over 120	over 480			over 6		over 10	over 50	over 120			over 5	over 30	over 120
	to 6	to 30	to 120	to 480		all	to 6	to	to 10	to 50	to 120	to	all	to 5	to 30	to 120	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30′	20′	10′	0.5	0.025	0.06	0.12	0.4

UNITS


mm

SIZE

A4

SCALE

FIRST ANGLE PROJECTION



CIXI WANJIE ELECTRONIC CO., LTD

NAME

WJ950-9.5