




慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

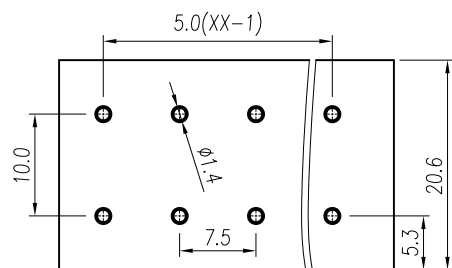

P.C.B. LAYOUT

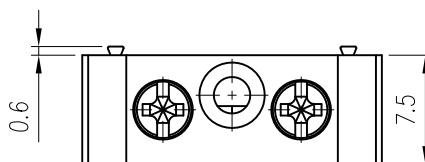

Material

Housing: PA66, UL94V-0

Pin header: Brass, Sn plated

Screws: M3, Steel, Zinc plated

Wire guard: Brass, Ni plated

Pitch: 7.5mm

Poles: 01~XXP

Electrical

Standard: UL IEC

Rated voltage: 300V 320V

Rated current: 30A 32A

Contact resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstanding voltage: AC 2000V/1 Min

Wire range: 24~10AWG(UL) 4.0mm²(IEC)





Mechanical

Temp. Range: -40°C~+105°C

MAX Soldering: +250°C, for 5 Sec

Torque: 0.5Nm(4.4lb.in)

Strip length: 6~7mm

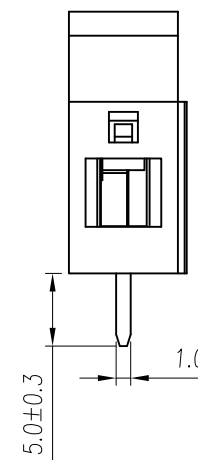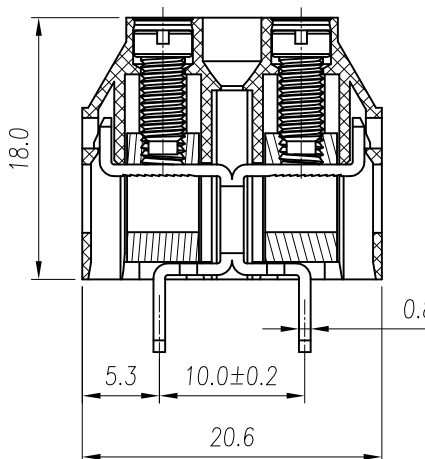

	linear dimension(Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	
						名称 / TITLE	WJDS4-7.5-XXP-1YY-00A
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							