

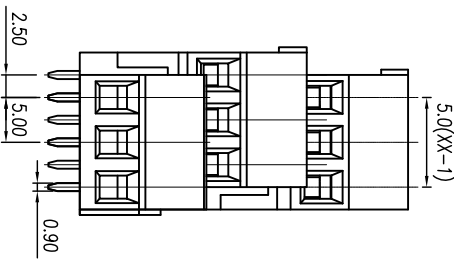
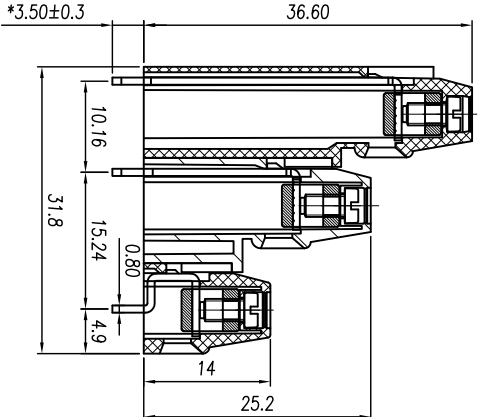


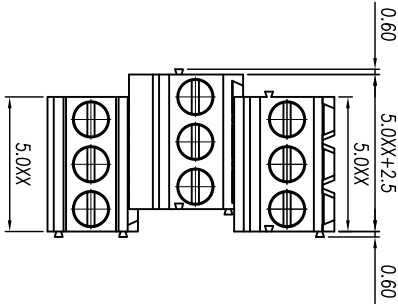

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

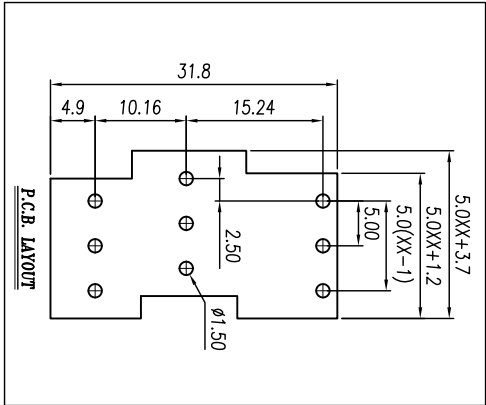

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	30~12AWG	2.5mm²
With standing voltage	AC 2000V/1 Min	

Mechanical

Torque 0.4Nm(3.6lb.in)

Steip Length 6-7mm

Temp.Range -40°C~+105°C

MAX Soldering +250°C, for 5 Sec

Dimensions

Pitch 5.0mm

Poles 2~24p

Material

Housing PA66, UL94V-0

Screws M2.5, Steel, Zn plated

Pin header Brass, Tin plated

Cage Brass, Ni plated

		linear dimension(Tolerances Standard GB/T 14486-2008)														≡		—		□		//		⊥	
		over		to		over		to		over		to		over		to		over		to					
variable range	6 to 10	6	10	10	18	30	50	80	120	160	200	250	all to 5		5	0.025	0.06	0.12	0.4						
	6 to 10	6	10	18	30	50	80	120	160	200	250			5	0.025	0.06	0.12	0.4							
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4									



CIXI WANJIE ELECTRONIC CO., LTD

WJEX600A-5.0-XXP-1YY-00A

