







CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

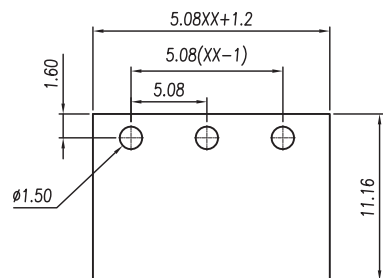

P.C.B. LAYOUT

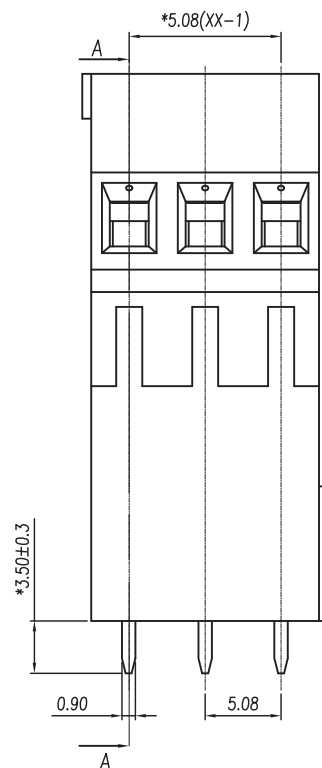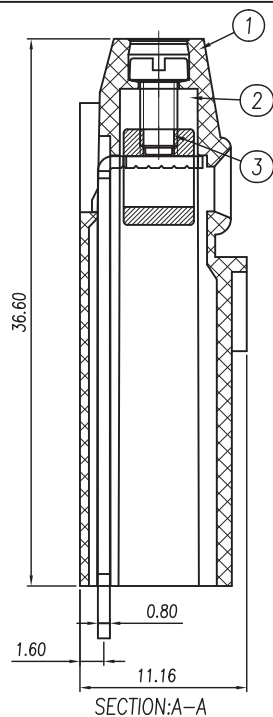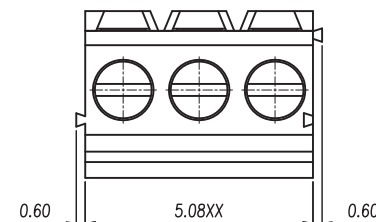

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wire range	30~14AWG	1.5mm ²
Wrth standing voltage	AC 2000V/1 Min	

Mechanical

Torque	0.4Nm(3.6Lb.in)
Steip Length	6-7mm
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C, for 5 Sec

Dimensions

Pitch	5.08mm
Poles	2~24p

Material

Housing	PA66, UL94V-0
Screws	M2.5 Steel Zn plated
Pin header	Brass 0.8t Tin plated
Cage	Brass, Ni plated


linear dimension(Tolerances Standard GB/T 14486-2008)

		over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
variable range	to 6															
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4



CIXI WANJIE ELECTRONIC CO., LTD

THIRD ANGLE PROJECTION



TITLE WJE3K508-5.08-XXP-1YY-00A