

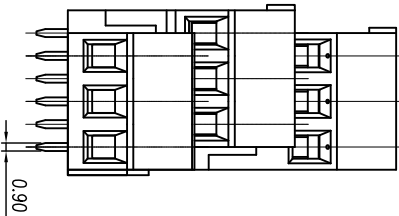
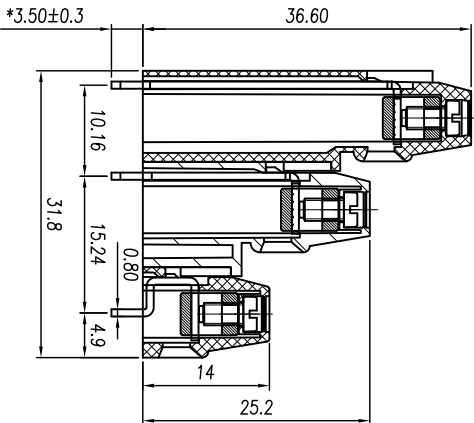


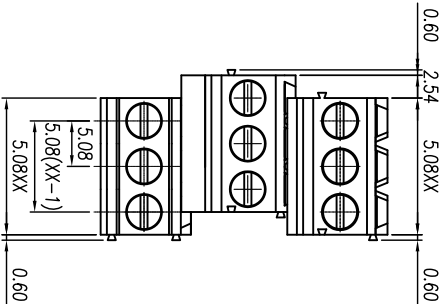

CIXI WANJIE ELECTRONIC CO., LTD

THE SPEC SHEET

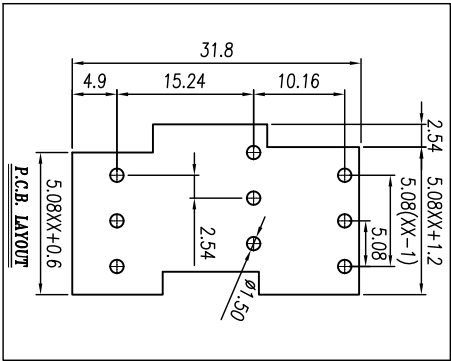

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ /DC500V	
Wire range	30~12AWG	2.5mm²
With standing voltage	AC 2000V/1 Min	

Mechanical

Steip Length	0.4Nm(3.6Lb.in)
Temp.Range	6-7mm
MAX Soldering	-40°C~+105°C
Dimensions	+250°C, for 5 Sec
Pitch	5.08mm
Poles	2~24p
Material	
Housing	PA66, UL94V-0
Screws	M2.5 ,Steel, Zn plated
Pin header	Brass, Tin plated
Cage	Brass, Ni plated

linear dimension(Tolerances Standard GB/T 14486--2008)											
variable range	to	over	to	over	to	over	to	over	to	over	to
	6	6	10	10	18	30	50	80	120	160	200
	to	to	to	to	to	to	to	to	to	to	to
	10	10	18	30	50	80	120	160	200	250	250
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

UNITS	mm	SIZE	A4	SCALE	1:2.1	THIRD ANGLE PROJECTION	
 CIXI WANJIE ELECTRONIC CO., LTD						TITLE	WJ/E3/K508A-5.08-XXP-1YY-00A