

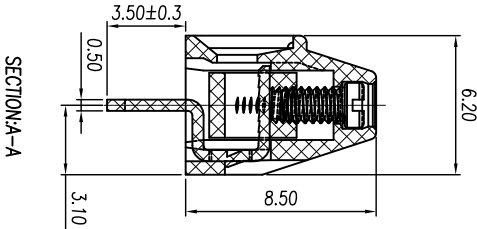
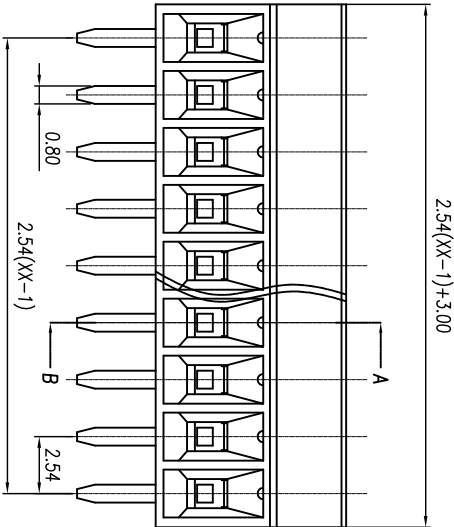


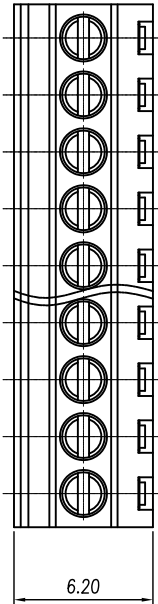

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

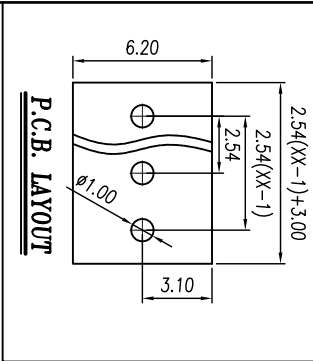

参考标准/Standard	UL	IEC
额定电压/Rated voltage	150V	130V
额定电流/Rated current	6A	8A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	26~18AWG	1.0mm ²
耐电压/With standing voltage	AC 1300V/1 Min	
机械性能/Mechanical		
扭矩/Torque	0.1Nm(1.02Lb.in)	
温度范围/Temp.Range	-40°C~+105°C	
瞬时温度/MAX Soldering	+250°C, for 5 Sec	
尺寸/Dimensions		
间距/Pitch	2.54mm	
极数/Poles	2-24P	
材质及电镀/Material		
塑件/Housing	PA66, UL94V-0	
螺丝/Screws	M1.6 Steel Zn plated	
焊脚/Pin header	Brass Tin plated	
方块/Cage	Brass Ni plated	

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over	over	over	over	over	over	over	over	over	over	over
variable range	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	3:1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					
名称/TITLE	WJEK254-2.54-XXP-1YY-00A				