

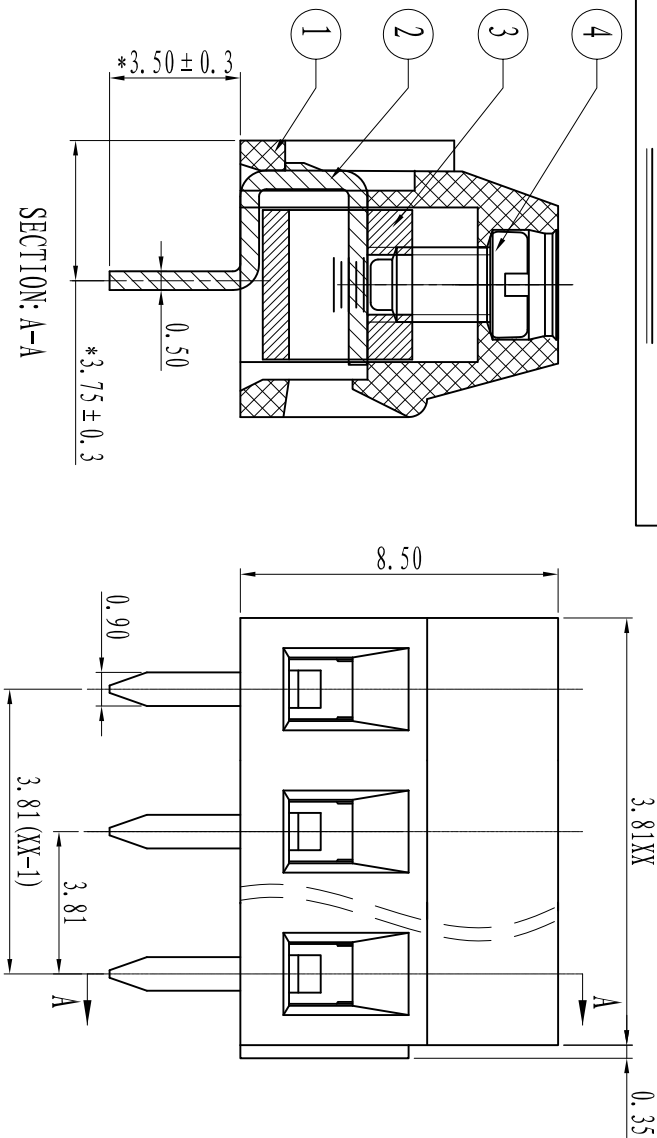


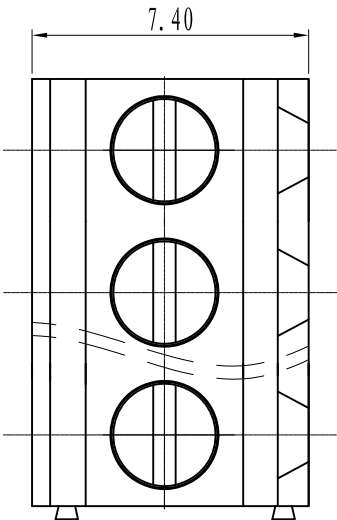

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

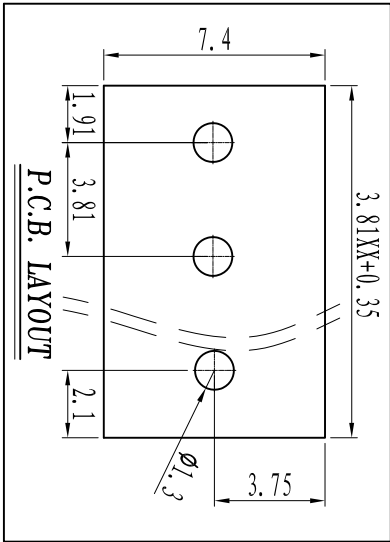

电 气 性 能/Electrical

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	10A	13.5A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28~16AWG	1.0mm ²
耐 电 压/Wrth standing voltage	AC 2000V/1 Min	
机 械 性 能/Mechanical		
扭矩/Torque	0.2Nm(1.8Lb.in)	
温度范围/Temp.Range	-40°C~+105°C	
瞬时温度/MAX Soldering	+250°C, for 5 Sec	
剥线长度/Steip Length	4-5mm	
尺 寸/Dimensions		
间距/Pitch	3.81mm	
极 数/Poles	2-24p	
材 质 及 电 镀/Material	PA66, UL94V-0	
塑 件/Housing	M2.0, Steel Zn plated	
螺 丝/Screws	Brass, Tin plated	
焊 脚/Pin header		

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over	over	over	over	over	over	over	over	over	over	over
variable	6	10	18	30	50	80	120	160	200	250	all
range	to	to	to	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:1
第三视图/THIRD ANGLE PROJECTION					
名称 / TITLE	W/EK381-3.81-XXP-1YY-00A				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD