

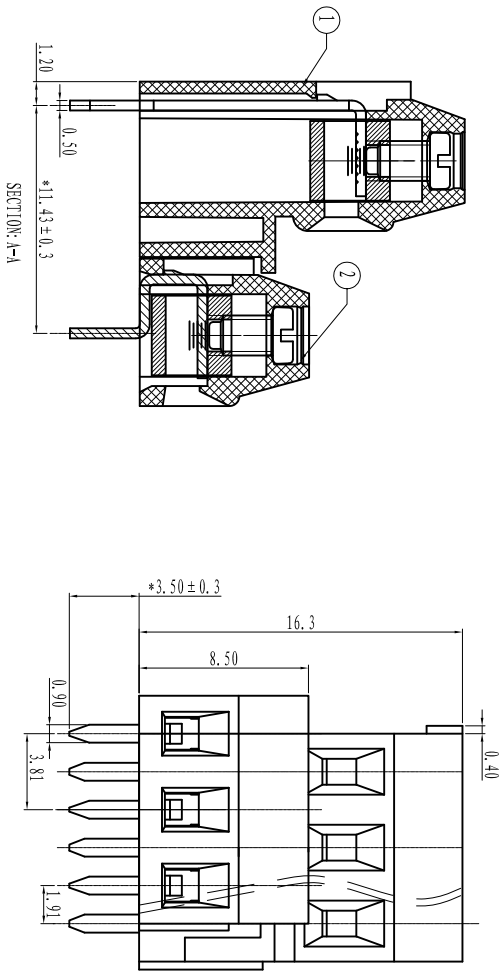


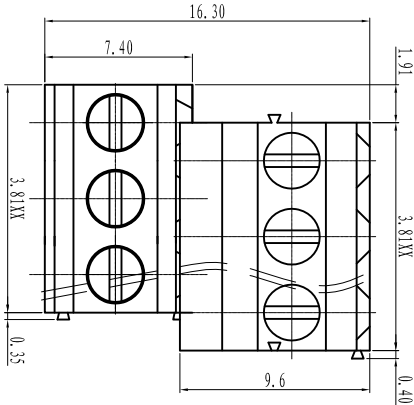

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

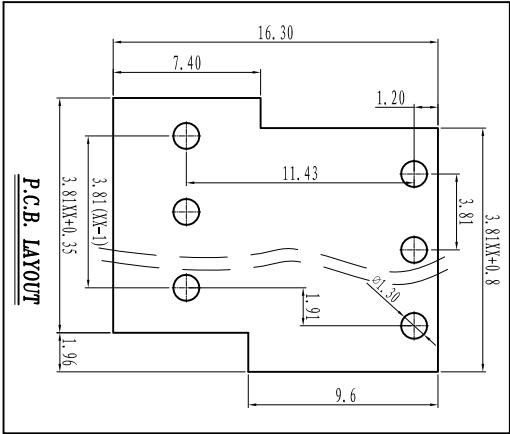

电 气 性 能/ Electrical

参考标准/ Standard	UL	IEC
额定电压/ Rated voltage	300V	250V
额定电流/ Rated current	10A	13.5A
接触电阻/ Contact resistance	20mΩ	
绝缘电阻/ Insulation resistance	500MΩ/ DC500V	
使用线径/ Wire range	28~16AWG	1.0mm ²
耐 电 压/ With standing voltage	AC 2000V/1 Min	

机 械 性 能/ Mechanical

扭矩/ Torque	0.2Nm(1.8Lb.in)
剥线长度/ Steip Length	4.5mm
温度范围/ Temp.Range	-40°C~+105°C
瞬时温度/ MAX Soldering	+250°C, for 5 Sec

尺 寸/ Dimensions

间 距/ Pitch	3.81mm
极 数/ Poles	2X2~2X24p

材 质 及 电 镀/ Material

塑 件/ Housing	PA66, UL94V-0
螺 丝/ Screws	M2.0 Steel Zn plated
焊 脚/ Pin header	Brass, Tin plated
方块/ Cage	Brass, Ni plated

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over	over	over	over	over	over	over	over	over	all	over
variable range	6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	5 to 30	30 to 120
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位/ UNITS	mm	尺寸/ SIZE	A4	比例/ SCALE	8:2
第三视角/THIRD ANGLE PROJECTION					
名称/ TITLE	WJEK38B-3.81-2*XXP-1YY-00A				