






CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE


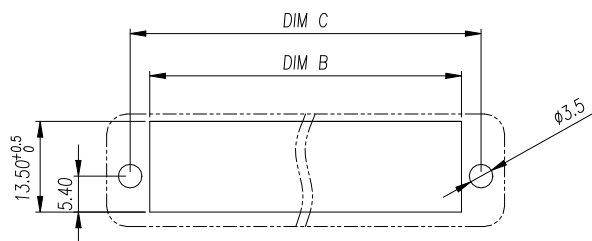


P.C.B. LAYOUT



Note

Temp.Range	-40°C~+105°C
Pitch	5.08mm
/ Poles	2-24p
/Housing	PA66, UL94V-0

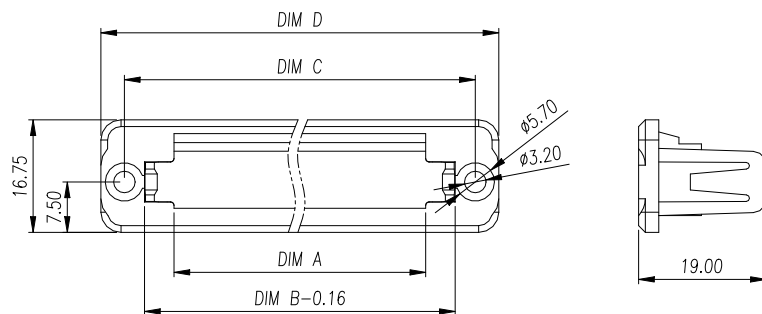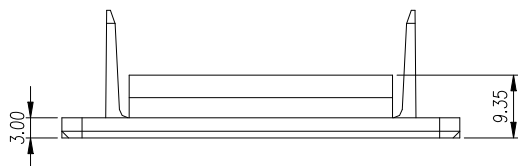

DIM A=5.08*XXP+1.9
DIM B=5.08*XXP+10.84
DIM C=5.08*XXP+16.67
DIM D=5.08*XXP+23.67

Poles	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	
DIMA	12.06	17.14	22.22	27.3	32.38	37.46	42.54	47.62	52.7	57.78	62.86	
DIMB	21.0	26.08	31.16	36.24	41.32	46.4	51.48	56.56	61.64	66.72	71.64	
DIMC	26.38	31.91	36.99	42.07	47.15	52.23	57.31	62.39	67.47	72.55	77.63	
DIMD	33.83	38.91	43.99	49.07	54.15	59.23	64.31	69.39	74.47	79.55	84.63	
TOL	±0.15					±0.25						
Poles	13P	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P
DIMA	67.94	73.02	78.1	83.18	88.26	93.34	98.42	103.5	108.58	113.66	118.74	123.82
DIMB	76.88	81.96	87.04	92.12	97.2	102.28	107.36	112.44	117.52	122.6	127.68	132.76
DIMC	82.71	87.79	92.87	97.95	103.03	108.11	113.19	118.27	123.35	128.43	133.51	138.59
DIMD	89.71	94.79	99.87	104.95	110.03	115.11	120.19	125.27	130.35	135.43	140.51	145.59
TOL	±0.30					±0.40						

linear dimension(Tolerances Standard GB/T 14486-2008)

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS	mm	SIZE	A4	SCALE	1:5	THIRD ANGLE PROJECTION	REV	V0
						TITLE	WJM01-5.08-XXP-1YY-00A	