



**CIEL LIGHT CO., LTD.**

**PRODUCT SPECIFICATION**

Model No.: CLSS-30A1AUR-21

Drawing No.: \_\_\_\_\_

Customer: \_\_\_\_\_


Customer's Model No.: \_\_\_\_\_

Customer's Drawing No.: \_\_\_\_\_

Descriptions


1. Emitting Color: Ultra Red
2. Lens Color: White Diffuse
3. Surface Black Color : Gray
4. Dice Material: AlGaInP/GaAs

Outline Drawing

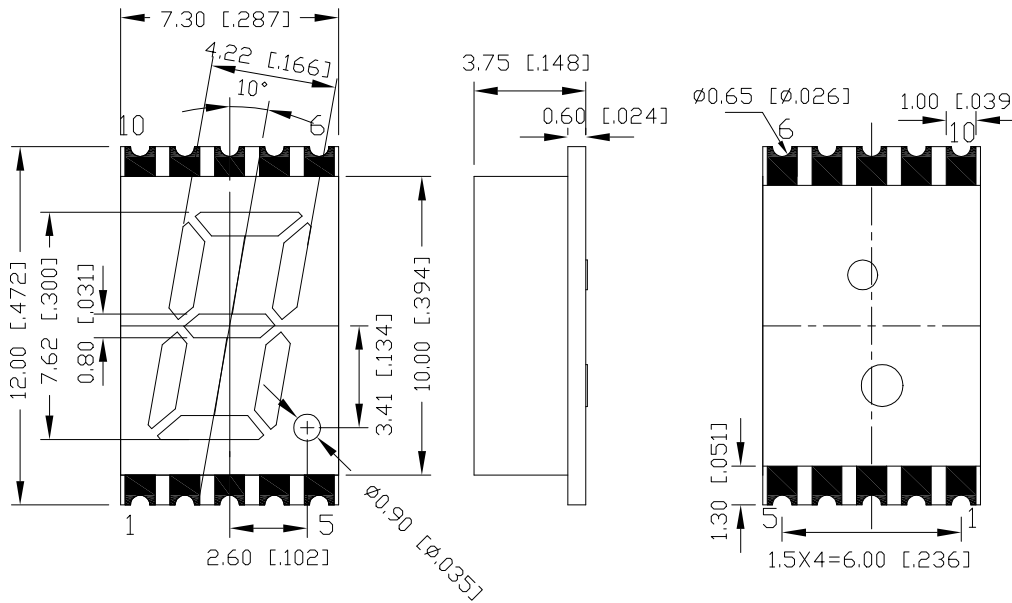

Tolerance is  $\pm 0.25\text{mm}$  unless otherwise noted, Unit=mm  
Pin bending  $\leq \text{length} * 1\%$

Internal Circuit Diagram(C.C.)

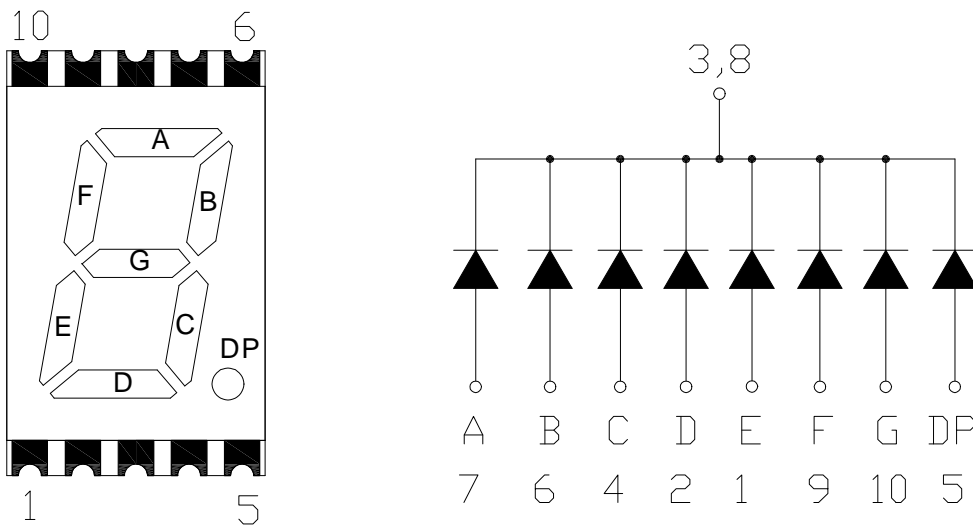





Electrical Optical Characteristics(Ta=25°C)

| Parameter                | Symbol         | Ultra Red |      |      | Unit | Test Condition |
|--------------------------|----------------|-----------|------|------|------|----------------|
|                          |                | Min       | Typ  | Max  |      |                |
| Forward Voltage          | V <sub>F</sub> | ---       | 2.00 | 2.40 | V    | IF=20mA        |
| Luminous Intensity       | I <sub>V</sub> | ---       | 9.8  | ---  | mcd  | IF=10mA        |
| Peak Wavelength          | λ <sub>P</sub> | ---       | 645  | ---  | nm   | IF=20mA        |
| Dominant Wavelength      | λ <sub>d</sub> | ---       | 635  | ---  | nm   | IF=20mA        |
| Spectral Line half-width | Δλ             | ---       | 20   | ---  | nm   | IF=20mA        |
| Reverse Leakage Current  | I <sub>R</sub> | ---       | ---  | 50   | μA   | VR=5V          |

Absolute Maximum Parameters(Ta=25°C)

| Parameter                   | Symbol           | Condition      | Rating     | Unit  |
|-----------------------------|------------------|----------------|------------|-------|
| Power Dissipation           | P <sub>D</sub>   | ---            | 80         | mW    |
| Reverse Voltage             | V <sub>R</sub>   | ---            | 5          | V     |
| Forward Average Current     | I <sub>F</sub>   | ---            | 30         | mA    |
| Temperature Coefficient     | I/C              | ---            | 0.33       | mA/°C |
| Pulse Current               | I <sub>FP</sub>  | Duty=1/10,1kHz | 100        | mA    |
| Operating Temperature Range | T <sub>opr</sub> | ---            | -25 ~ +85  | °C    |
| Storage Temperature Range   | T <sub>stg</sub> | ---            | -30 ~ +100 | °C    |
| Soldering Condition         | T <sub>sd</sub>  | ---            | 260°C/5sec | °C    |

Typical Electro/Optical Characteristic Curves(Ta=25°C)

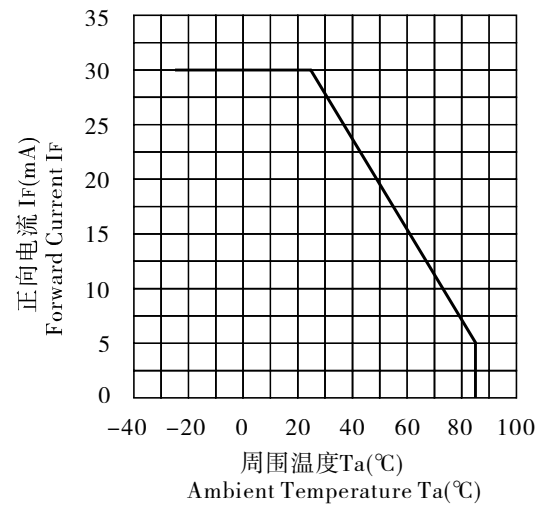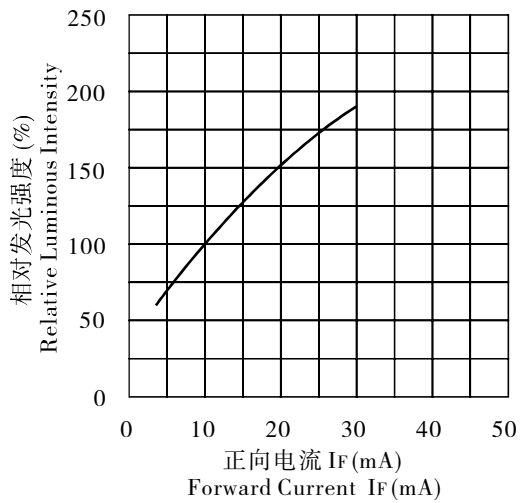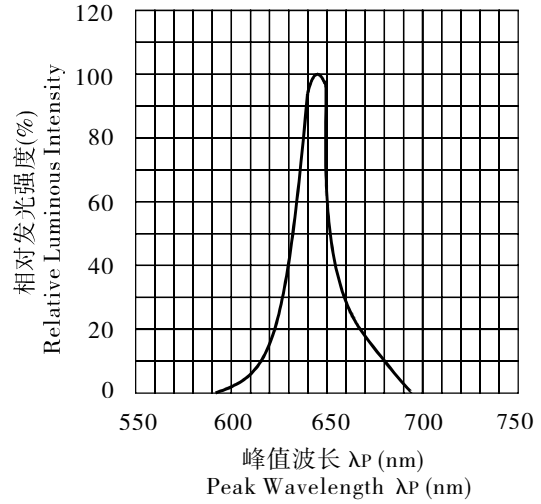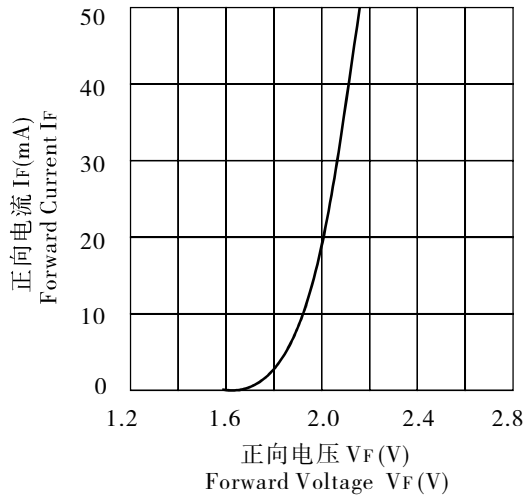

Reliability Test Conditions

| Test Item                                   | Test Condition                                | Result | Judgment Criteria   |
|---|---|--------|---|
| Consecutive operating life test             | IF=20mA, T=25°C, t=168h                       | 0/10   | Forward Voltage<br>VF(V)= Upper Limit × 1.2<br>Reverse Leakage Current<br>IR(μ A)=Upper Limit × 2.0<br>Luminous Intensity IV<br>(mcd)=Lower Limit × 0.7 |
| High temperature storage life test          | T=100°C, t=168h                               | 0/10   |   |
| Low temperature storage life test           | T=-25°C, t=168h                               | 0/10   |   |
| High temperature humidity storage life test | T=85 ± 2°C, RH=85% ± 3, t=168h                | 0/10   |   |
| Temperature cycle test                      | -25°C~25°C~100°C<br>30min 5min 30min 10cycles | 0/10   |   |
| Thermal shock test                          | 100°C 0°C<br>5min 5min 20cycles               | 0/10   |   |
| Soldering heat test                         | T=260 ± 5°C, t=10s ± 1s                       | 0/10   |   |
| Solderability test                          | T=235 ± 5°C, t=5s ± 0.5s                      | 0/10   | Steeped Part ≥ 95%  |
| Fall test                                   | h=100cm, 50times                              | 0/10   | Surface Appearance<br>Photoelectric<br>Properties Intact  |
| Terminal strength test                      | W=9.8N, t=30 ± 5s                             | 0/10   |   |
| Lead bending test                           | W=4.9N, 2times                                | 0/10   |   |