



CIEL LIGHT CO.,LTD.

PRODUCT SPECIFICATION

Customer:_____

Customer's Model No.:_____

Customer's Drawing No.:_____

Model No.: CL-5014UWCZ-001(6500K)

Drawing No.:_____



Features

Low Power Consumption
High Efficiency
Round Type
T1 (5mm) Diameter
With Flange
Solder Leads Without Stand-off
Compliant With RoHS

Descriptions

Chip Material: InGaN/GaN
Emitting Color: Warm White
Lens Color: Water Clear


Outline Drawing

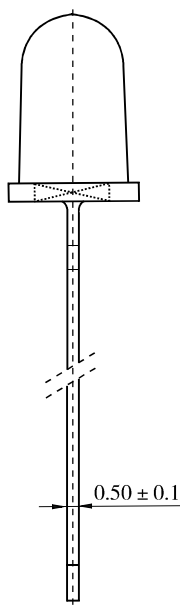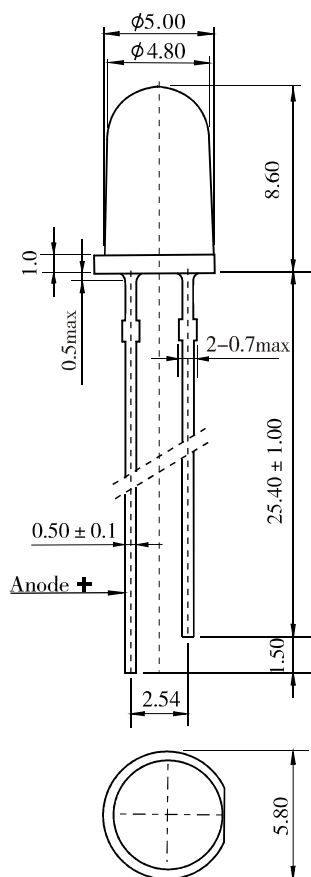

ATTENTION



OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE DEVICES



Tolerance is $\pm 0.25 \text{ mm}$ unless otherwise noted, Unit=mm
Pin bending $\leq \text{length} \times 1\%$

Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Warm White			Unit	Test Condition
		Min	Typ	Max		
Forward Voltage	V_F	---	3.20	3.60	V	IF=20mA
Luminous Intensity	I_V	12000	20000	---	med	IF=20mA
Chromaticity Coordinates (Tolerance: ± 0.01)	X	---	0.315	---	nm	IF=20mA
	Y	---	0.315	---	nm	IF=20mA
Spectral Line half-width	$\Delta \lambda$	---	30	---	nm	IF=20mA
Reverse Leakage Current	I_R	---	---	50	μA	VR=5V
Viewing Angle	$2\theta_{1/2}$	---	15	---	Deg	IF=20mA

Absolute Maximum Parameters (Ta=25°C)

Parameter	Symbol	Condition	Rating	Unit
Power Dissipation	P_D	---	120	mW
Reverse Voltage	V_R	---	5	V
Forward Average Current	I_F	---	30	mA
Temperature Coefficient	I/C	---	0.4	mA/ °C
Pulse Current	IFP	Duty=1/10,1kHz	100	mA
Operating Temperature Range	T_{opr}	---	-25 ~ +85	°C
Storage Temperature Range	T_{stg}	---	-30 ~ +100	°C
Soldering Condition	T_{sd}	---	260°C/5sec	°C






NOTE:

Luminous Intensity Measurement allowance is $\pm 10\%$.

$2\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.


The dominant wavelength is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Typical Electro/Optical Characteristic Curves ($T_a=25^{\circ}\text{C}$)

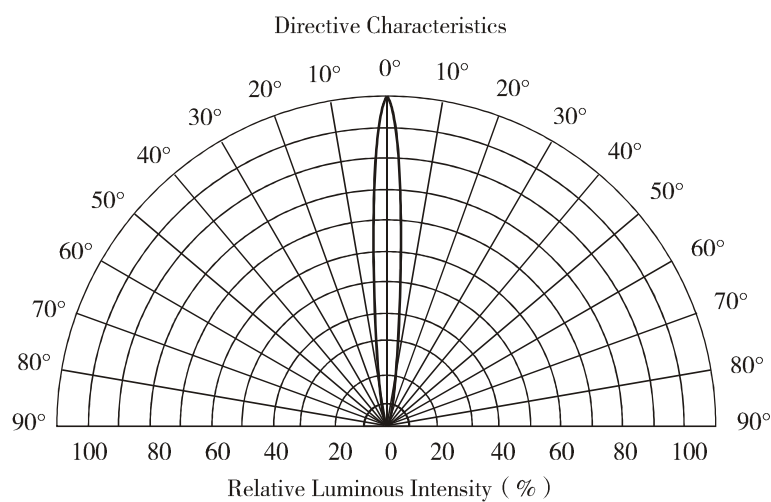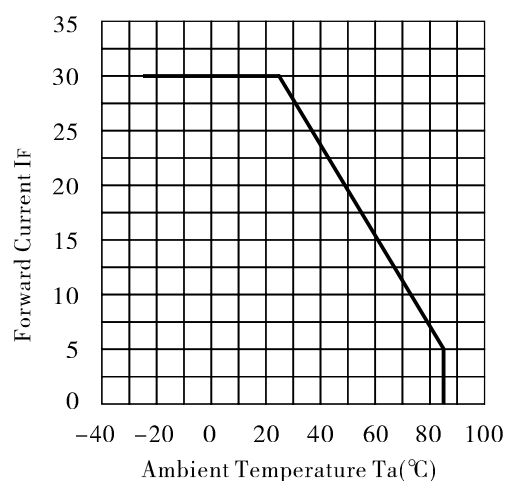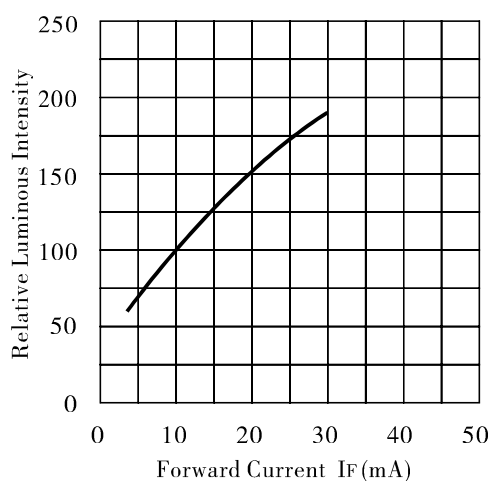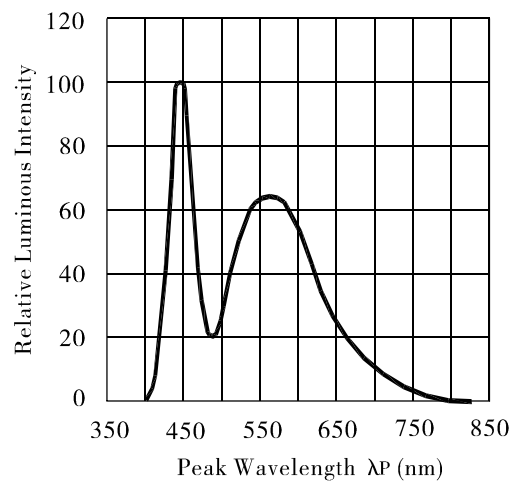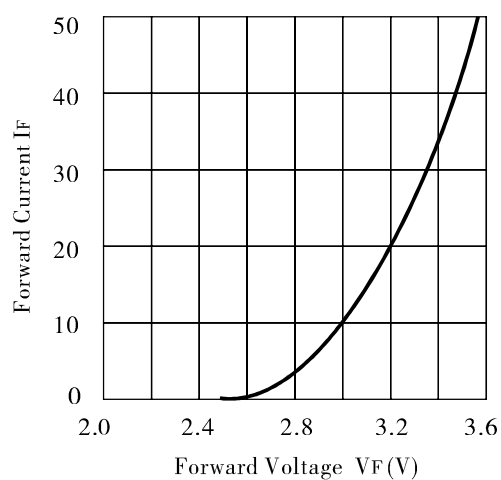

Color distinguishes Bin specifications

BIN	P4		P5		O4		O5	
CODE	X	Y	X	Y	X	Y	X	Y
	0.3011	0.3127	0.303	0.305	0.311	0.323	0.3124	0.3142
	0.311	0.323	0.3124	0.3142	0.3222	0.3331	0.3229	0.324
	0.3124	0.3142	0.3136	0.306	0.3229	0.324	0.3234	0.3151
	0.303	0.305	0.305	0.2972	0.3124	0.3142	0.3136	0.306
	0.3011	0.3127	0.303	0.305	0.311	0.323	0.3124	0.3142

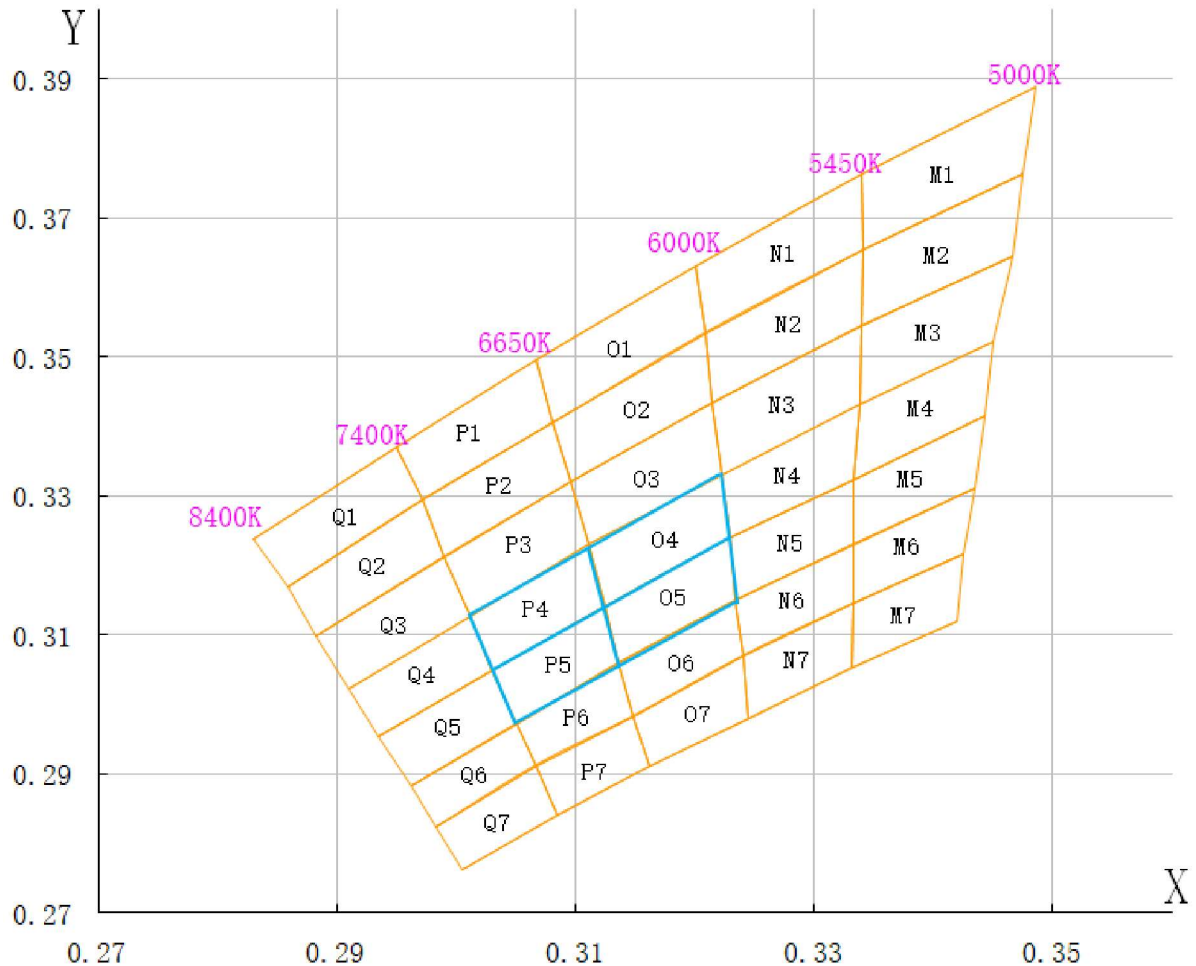

Reliability Test Conditions

Test Item	Test Condition	Result	Judgment Criteria
Consecutive operating life test	IF=20mA, T=25℃, t=168h	0/100	Forward Voltage $V_F(V) = \text{Upper Limit} \times 1.2$ Reverse Leakage Current $I_R(\mu A) = \text{Upper Limit} \times 2.0$ Luminous Intensity IV $(mcd) = \text{Lower Limit} \times 0.7$
High temperature storage life test	T=100℃, t=168h	0/100	
Low temperature storage life test	T=-25℃, t=168h	0/100	
High temperature humidity storage life test	T=85 ± 2℃, RH=85% ± 3, t=168h	0/100	
Temperature cycle test	-25℃~25℃~100℃ 30min 5min 30min 10cycles	0/100	
Thermal shock test	100℃ 0℃ 5min 5min 20cycles	0/100	
Soldering heat test	T=260 ± 5℃, t=10s ± 1s	0/100	
Solderability test	T=235 ± 5℃, t=5s ± 0.5s	0/100	Steeped Part ≥ 95%
Fall test	h=100cm, 50times	0/100	Surface Appearance Photoelectric Properties Intact
Terminal strength test	W=9.8N, t=30 ± 5s	0/100	
Lead bending test	W=4.9N, 2times	0/100	