

Data Sheet

Customer: _____

Part No: CL-SFC285UHRIR-660,850-02


Sample No: _____

Description: 2835 Red, IR SMD


Item No: _____

Customer			
Check	Inspection	Approval	Date

Package Dimensions

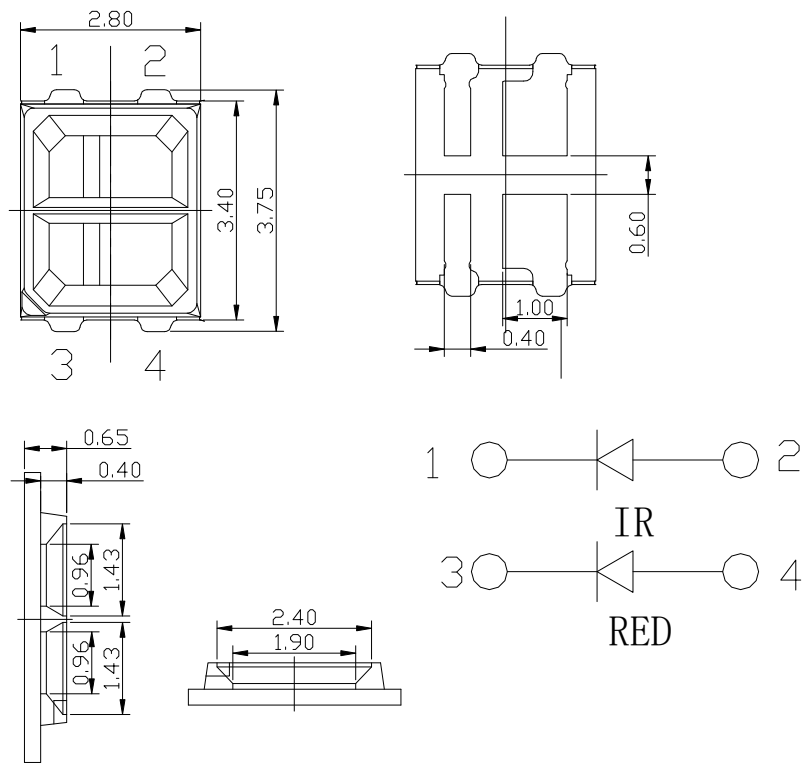

Recommended Soldering Pattern

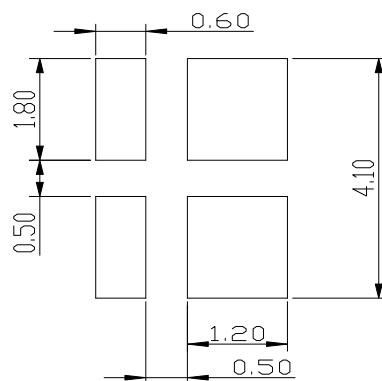

(NOTES) :

All dimensions are in millimeters
Tolerances are $\pm 0.1\text{mm}$ unless otherwise note.

Absolute maximum ratings

(Ta=25°C)


Parameter	Symbol	Value	Unit
Forward current	If	30	mA
Reverse voltage	Vr	--	V
Power dissipation	Pd	105	MA
Operating temperature range	Top	-25~+80	°C
Storage temperature range	Tstg	-30~+85	°C
Peak pulsing current (1/8 duty f=1KHz)	Ifp	50	mA
Junction Temperature	Tj	115	°C
Electrostatic Discharge(HBM)	ESD	1000	V

Electro-Optical characteristics

(TA=25°C)

Parameter	Test Condition	Symbol	Color	Value			Unit
				Min	Typ	Max	
Color Temperature	IF=30mA	CCT	--	--	--	--	K
Forward voltage	IF=30mA	Vf	R IR	2.0 1.4	--	2.2 1.6	V
luminous flux	IF=30mA	φ	R IR	300 10	--	500 15	MCD MW
Viewing angle at 50% IV	IF=30mA	2θ1/2	R IR	--	120	--	Deg
Dominant wavelength	IF=30mA	λd	R IR	--	660 850	--	nm
Reverse current	VI=5V	Ir	--	--	--	--	μA
Color Rendering Index	IF=30mA	CRI	--	--	--	--	Ra

Typical photo-electricity characteristic curve chart

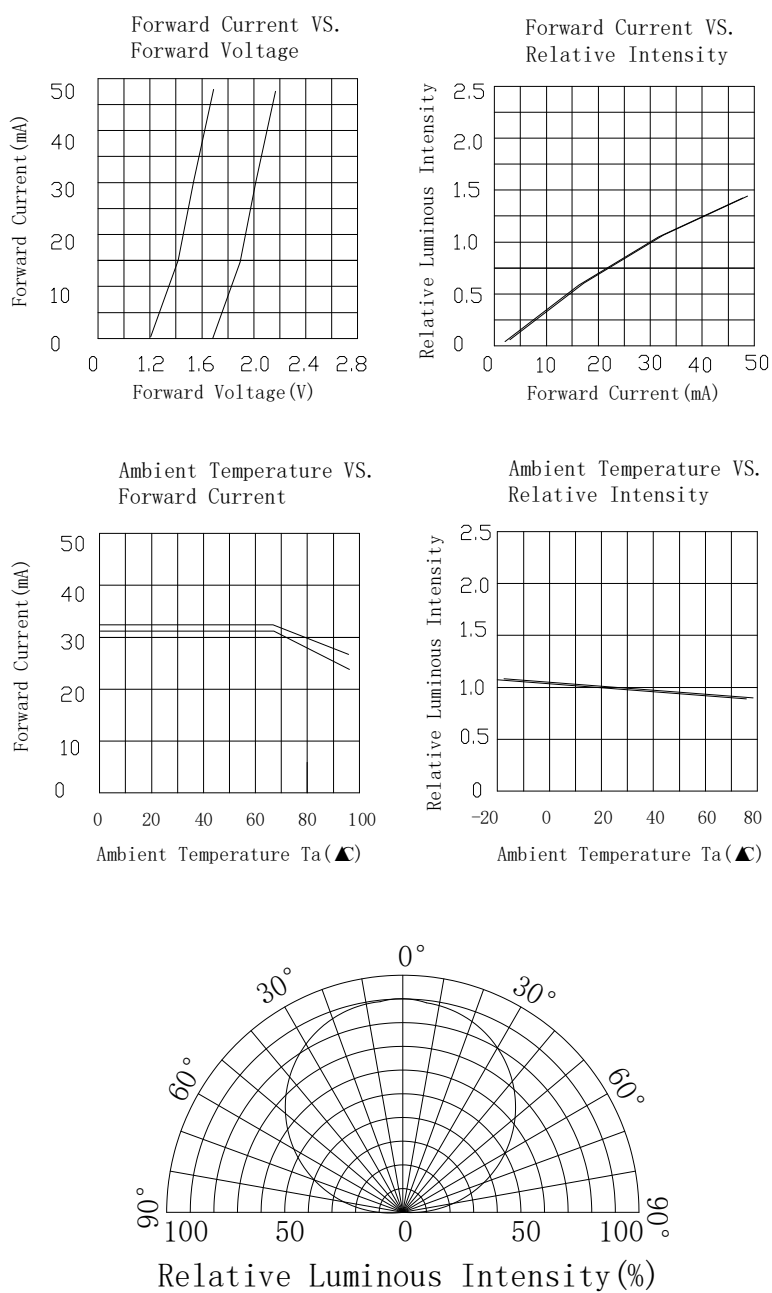

Test items and results of reliability						
Type	Test item	Standard	Test Conditions	Note	Quantity	Number of Damaged
Environmental Sequence	Temperature Cycle	JIS C 7021 (1977)A-4	-25°C 30min ↑↓5min 80°C 30min	100 cycle	22	0
	Thermal Shock	MIL-SLD-107D	-25°C 15min ↑↓5min 80°C 15min	50 cycle	22	0
	High Humidity Heat Cycle	JIS C 7021 (1977)A-5	30°C <=> 65°C 90%RH 24hrs/1cycle	10 cycle	22	0
	High Temperature Storage	JIS C 7021 (1977)B-10	T _a =80°C	1000hrs	22	0
	Humidity Heat Storage	JIS C 7021 (1977)B-11	T _a =60°C RH=90%	1000hrs	22	0
	Low Temperature Storage	JIS C 7021 (1977)B-12	T _a =-30°C	1000hrs	22	0
Operation Sequence	Life Test	JIS C 7035 (1985)	T _a =25°C I _F =30mA	1000hrs	22	0
	High Humidity Heat Life Test	*	60°C RH=90% I _F =30mA	500hrs	22	0
	Low Temperature Life Test	*	T _a =-25°C I _F =30mA	1000hrs	22	0

* to reliability test standard specification for in this line.

Criteria For Judging Damage

Test item	Symbol	Test Condition	Standard
Forward Voltage	V _F	I _F =I _{FT}	Initial Data±10%
Reverse Current	I _R	V _R =5V	I _R ≤10μA
Luminous Intensity	I _V	I _F =I _{FT}	Average I _V degradation ≤ 30% Single LED I _V degradation ≤ 50%
Resistance to Soldering Heat	--	--	Material without internal cracks, no material between stripped, no dead light.


*

The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.

Guideline for Soldering

Reflow Soldering: Use the conditions shown in the under Figure of Pb-Free Reflow Soldering.

SMD-Reflow Soldering Profile for lead free soldering(Acc.to J-STD-020B)

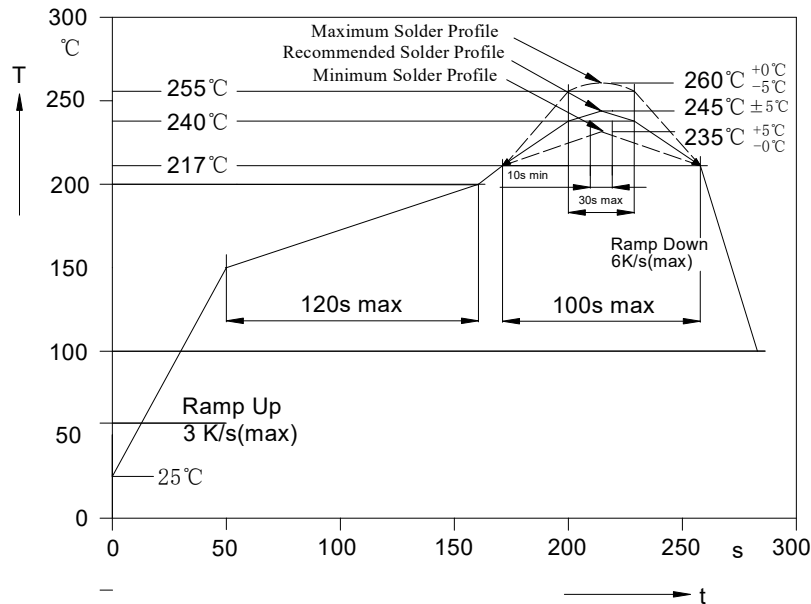

Remark: If not lead free soldering, the recommended solder profile is 230 °C and max solder profile is 245 °C.

1、 Hand Soldering

1)、

A soldering iron of less than 20W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering iron under 360 °C while soldering. Each terminal of the LED is to go for less than 3 seconds and for onetime only.

2)、

Be careful because the damage of the product is often started at the time of the hand soldering.

2、 Cleaning

1)、


It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30 °C for 3 minutes or 50 °C for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

2)、


Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be higher than 300W. Before cleaning, a pre-test should be done to confirm whether any damage to LEDs will occur.

Tape and Packaging

1、 Tape leader and reel

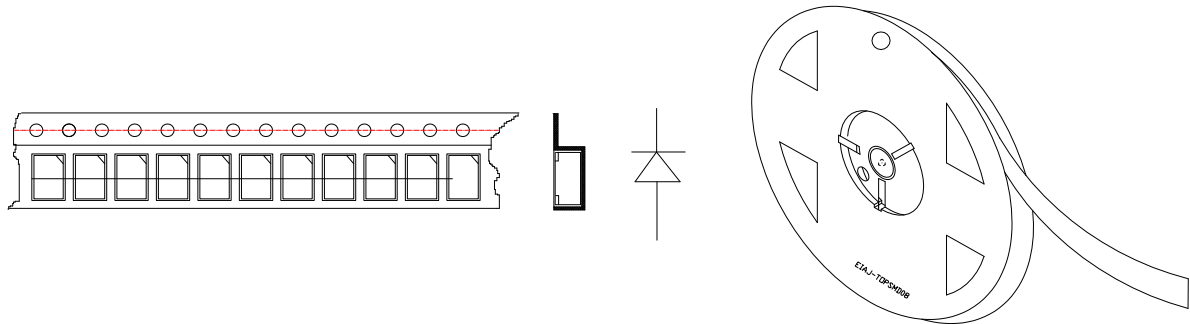

2、 Moisture Resistant Packaging

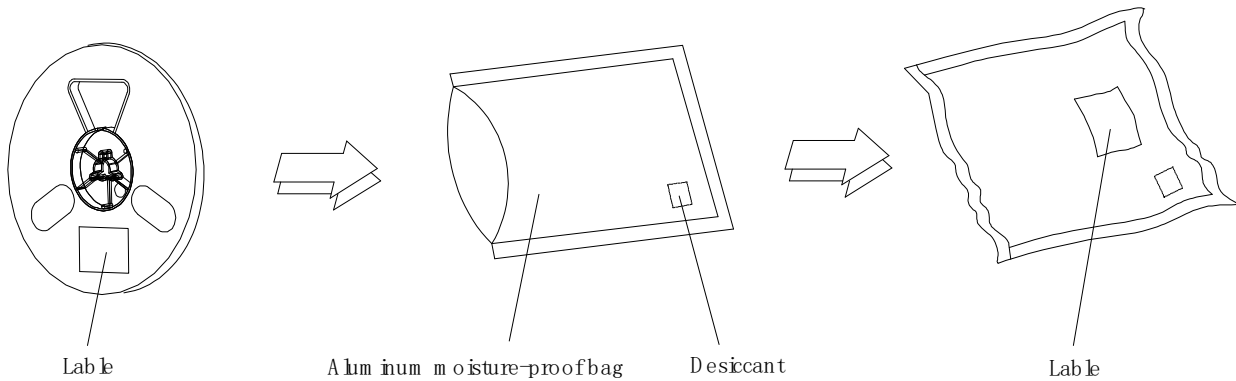


3、 Cautions

1)、

The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when use the picking up nozzle, the pressure on the silicone resin should be proper.

2)、




The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible. pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.



Handling Precautions

1、

Handle the component along the side surface by using forceps or appropriate tools; do not directly touch or Handle the silicone lens surface, it may damage the internal circuitry.

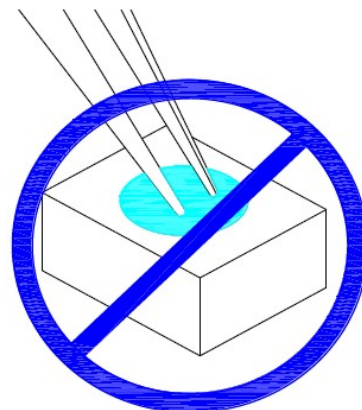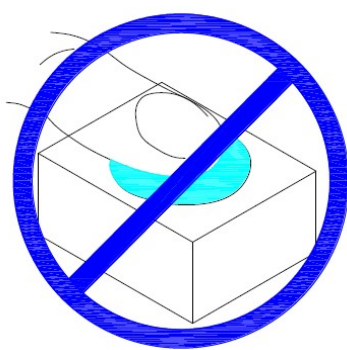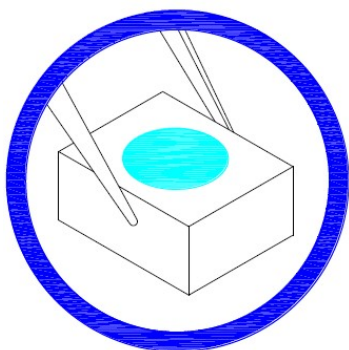

2、 Do not stack together assembled PCBs containing LEDs.

3、 Not suitable to operate in acidic environment, $\text{PH} < 7$ Impact may scratch the silicone lens or damage the internal circuitry

