

Data Sheet

Customer: _____

Part No: _____ CL-SFC506RGY-01 _____

Sample No: _____

Description: _____ 5050 Red/Green/Yellow SMD _____

Item No: _____




Customer			
Check	Inspection	Approval	Date

Features:

- . Reflow Solderable
- . High Luminous Intensity and Low Power Dissipation
- . Good Reliability and Long Life
- . Complied With RoHS Directive

Applications

- Optical indicator
- Indoor display
- Backlighting in dashboard and switch
- Flat backlighting for LCD, symbol and display
- General use

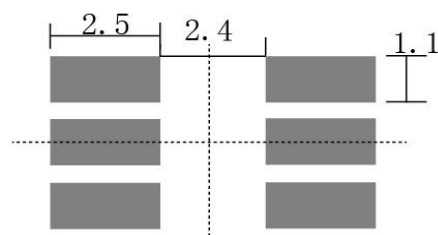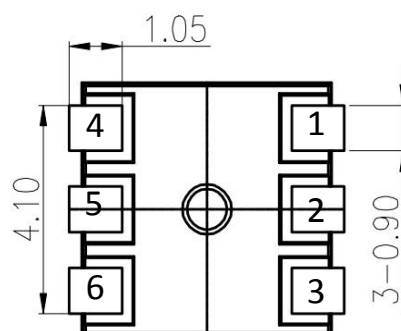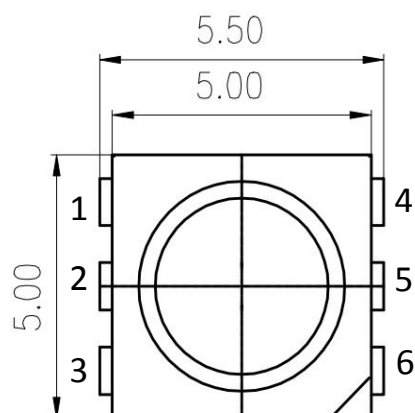

Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is $\pm 0.2\text{mm}$ unless otherwise noted.

Selection Guide

Part No.	Dice	Lens Type	Luminous intensity(mcd) @ 20mA			Viewing Angle
			Min	Typ	Max	
CL-SFC506RGY-01	(R) AlGaInP	Water Clear	600	--	1300	120
	(G) InGaIn		780	--	1700	
	(Y) AlGaInP		210	--	460	

Note:

- 1.1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
- 2.the above luminous intensity measurement allowance tolerance $\pm 10\%$

Electrical / Optical Characteristics at Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Units	test conditions
Forward Voltage	R	1.8	--	2.4	V	IF=20mA
	G	2.8	--	3.4		
	Y	1.8	--	2.4		
Reverse Current	IR	--	--	10	uA	VR = 5V
Dominate Wavelength	R	617	--	626	nm	IF=20mA
	G	515	--	527		
	Y	585	--	594		

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating	Units
Power Dissipation	R	48	mW
	G	68	
	Y	48	
DC Forward Current	IF	20	mA
Peak Forward Current [1]	R	75	mA
	G	100	
	Y	75	
Reverse Voltage	VR	5	V
Electrostatic Discharge (HBM)	ESD	2000	V
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+100	°C

Note:

1. 1/10 Dut cycle,0.1ms pulse width.
2. The above forward voltage measurement allowance tolerance $\pm 0.1V$.
3. The tolerance of wave length: $\pm 1nm$.

BIN CODE LIST(Red)

Luminous Intensity(IV)				
BIN CODE	MIN	MAX	Unit	IF
N	600	780	mcd	20mA
O	780	1000		
P	1000	1300		

Tolerance on each Intensity bin is: +/-10%

Forward Voltage(VF)				
BIN CODE	MIN	MAX	Unit	IF
VA3	1.8	1.9	V	20mA
VA4	1.9	2.0		
VB1	2.0	2.1		
VB2	2.1	2.2		
VB3	2.2	2.3		
VB4	2.3	2.4		

Tolerance on each Forward Voltage bin is: +/-0.05V

Dominant Wavelength(Hue)				
BIN CODE	MIN	MAX	Unit	IF
PA	617	620	nm	20mA
PB	620	623		
PC	623	626		

Tolerance for each Dominate Wavelength bin is: +/- 1nm

BIN CODE LIST(Green)

Luminous Intensity(IV)				
BIN CODE	MIN	MAX	Unit	IF
O	780	1000	mcd	20mA
P	1000	1300		
Q	1300	1700		

Tolerance on each Intensity bin is: +/-10%

Forward Voltage(VF)				
BIN CODE	MIN	MAX	Unit	IF
VD1	2.8	2.9	V	20mA
VD2	2.9	3.0		
VD3	3.0	3.1		
VD4	3.1	3.2		
VE1	3.2	3.3		
VE2	3.3	3.4		

Tolerance on each Forward Voltage bin is: +/-0.05V

Dominant Wavelength(Hue)				
BIN CODE	MIN	MAX	Unit	IF
PF	515	518	nm	20mA
PG	518	521		
PH	521	524		
PI	524	527		

Tolerance for each Dominate Wavelength bin is: +/- 1nm

BIN CODE LIST(Y)

Luminous Intensity(IV)				
BIN CODE	MIN	MAX	Unit	IF
J	210	270	mcd	20mA
K	270	350		
L	350	460		

Tolerance on each Intensity bin is: +/-10%

Forward Voltange(VF)				
BIN CODE	MIN	MAX	Unit	IF
VA3	1.8	1.9	V	20mA
VA4	1.9	2.0		
VB1	2.0	2.1		
VB2	2.1	2.2		
VB3	2.2	2.3		
VB4	2.3	2.4		






Tolerance on each Forward Voltage bin is: +/-0.05V

Dominant Wavelength(Hue)				
BIN CODE	MIN	MAX	Unit	IF
PD	585	588	nm	20mA
PE	588	591		
PF	591	594		


Tolerance for each Dominate Wavelength bin is: +/- 1nm

Typical optical characteristics curves

Ambient Temperature VS. Forward Current

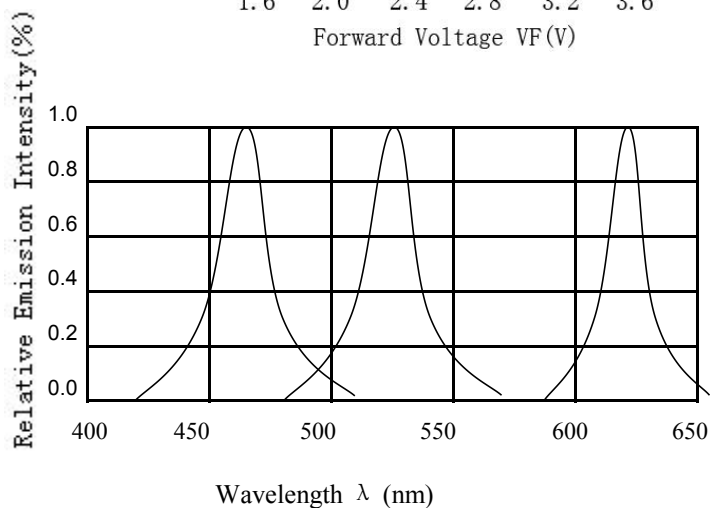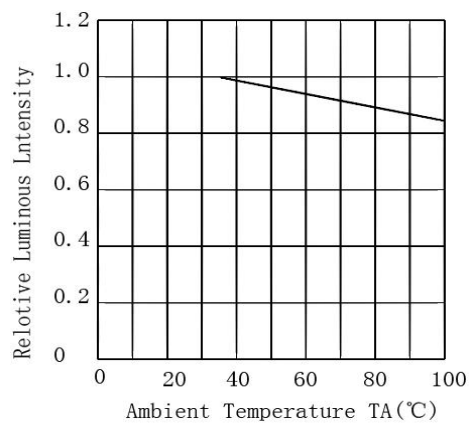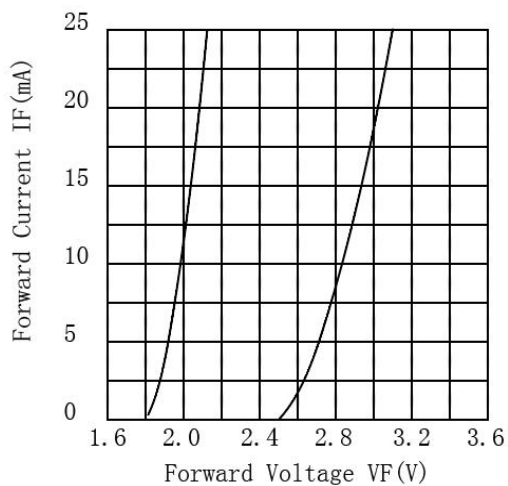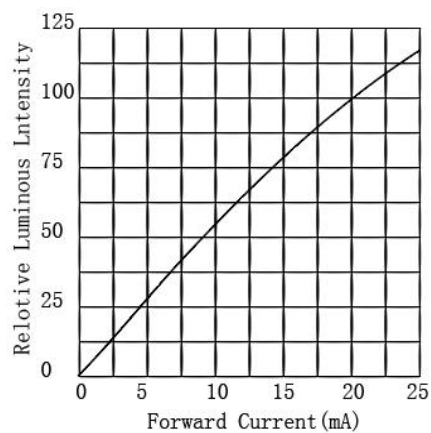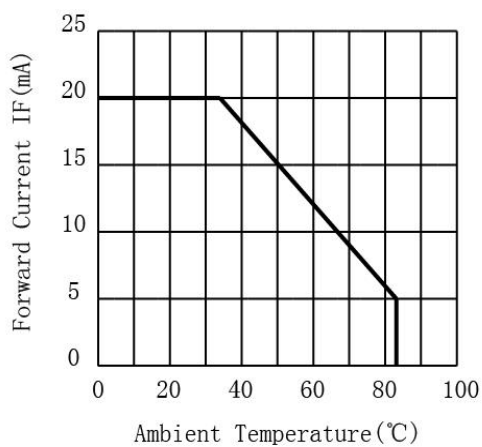

Radiation Diagram $T_a = 25^\circ\text{C}$

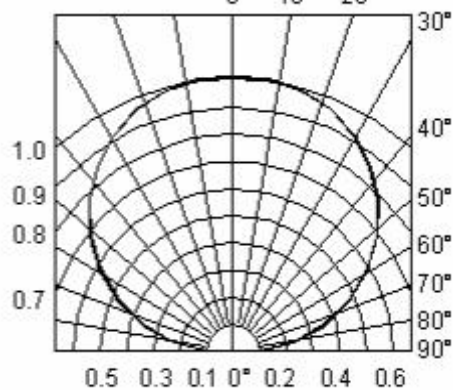

Reliability Test Items And Conditions

Test Items	Ref.Standard	Test conditions	Time	Quantity	Ac/Re
Reflow Soldering	JESD22-B106	Temp.:260°C±5°C Min.5sec.	3 times.	22Pcs.	0/1
Temperature Cycle	JESD22-A104	100°C±5°C 30 min. ↑↓5 min -40°C±5°C 30 min.	100 Cycles	22Pcs.	0/1
High Temperature Storage	JESD22-A103	Temp:100°C±5°C	1000Hrs	22Pcs.	0/1
Low Temperature Storage	JESD22-A119	Temp:-40°C±5°C	1000Hrs	22Pcs.	0/1
Life Test	JESD22-A108	Ta=25°C±5°C IF=20mA	1000Hrs	22Pcs.	0/1
High temperature and high humidity storage experiment	JESD22-A101	85°C±5°C / 85%RH	1000Hrs	22Pcs.	0/1

Criteria For Judging Damage

Test Items	Symbol	Test conditions	Criteria For Judgement	
			Min.	Max.
Forward Voltage	VF	IF=20mA		U.S.L*)x1.1
Reverse Current	IR	VR = 5V		U.S.L*)x2.0
Luminous intensity	IV	IF=20mA	L.S.L*)x0.7	

U.S.L: Upper standard level


L.S.L: Lower standard level

The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products.It does not constitute the warranting of industrial property nor the granting of any license.

SMT Reflow Soldering Instructions

1. The number of reflow soldering shall not exceed two times, and the time from the second processing to the first completion shall not exceed 24H
2. When soldering, do not put stress on the LEDs during heating.
3. Reflow temperature distribution (Acc.to J-STD-020D)

Profile Feature	Sn-Pb Eutectic Assembly		Pb-Free Assembly	
	Large Body	Small Body	Large Body	Small Body
Average ramp-up rate (TL to Tp)	3 °C/second max.		3 °C/second max.	
Preheat				
-Temperature Min(TSmin)	100 °C		150 °C	
-Temperature Max(TSmax)	150 °C		200 °C	
-Time(min to max)(ts)	60-120 seconds		60-180 seconds	
Tsmax to TL				
-Ramp-up Rate			3 °C/second max.	
Time maintained above:				
-Temperature(TL)	183 °C		217 °C	
-Time(tL)	60-150 seconds		60-150 seconds	
Peak Temperature(Tp)	225+0/-5 °C	240+0/-5 °C	245+0/-5 °C	260+0/-5 °C
Time within 5 °C of actual Peak Temperature(tp)	10-30 seconds	10-30 seconds	10-30 seconds	20-40 seconds
Ramp-down Rate	6 °C/second max.		6 °C/second max.	
Time 25 °C to Peak Temperatur	6 minutes max.		8 minutes max.	

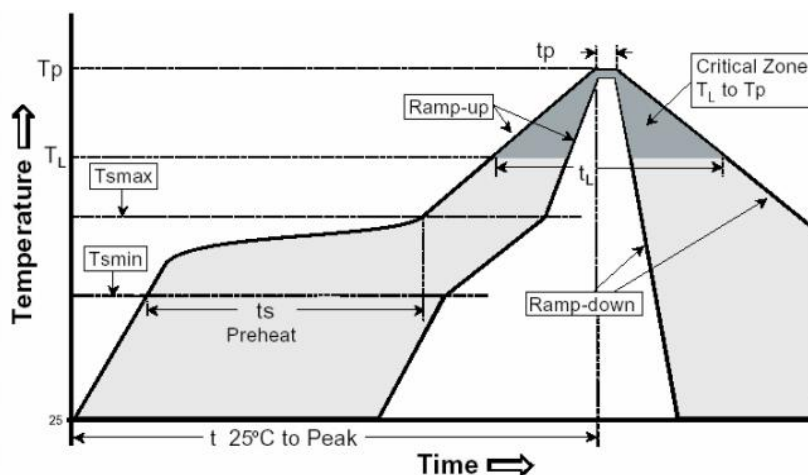


Soldering iron

1. When hand soldering, the temperature of the iron must be less than 350 °C for 3 seconds
2. The hand solder should be done only one time

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed in advance whether the characteristics of LEDs will or will not be damaged by repairing.

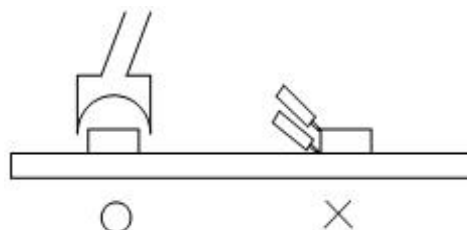

Storage

This product uses sealing anti-moisture antistatic packaging, and with desiccant, humidity card.

Before packaging is opened:

1. The storage environment is: the ambient temperature should be maintained between 5 ° C and 30 ° C, and the relative humidity should be kept within 60% RH. (The storage period is 2 months. If more than two months, please return the product to our company to help dehumidify)
2. Please check the package for leaks before opening. If there is a leak, return to the factory for dehumidification.

After opening the package:

1. After opening the package, check whether the humidity card has a discoloration phenomenon. Please remove the material from the bag and use it after dehumidifying 24H at 65 ° C.
2. Environmental conditions: The ambient temperature should be kept between $\leq 30^{\circ}\text{C}$ and relative humidity The lower 60 % RH should be maintained.
3. if the material is not produced after exposure in the workshop for more than 24 hours, the product must be put back in the oven, dehumidified with 65 ° C 24H, and then can be used again. If the material is not produced after 48 hours of exposure in the workshop, return the material to the SMD plant for high temperature dehumidification.
4. When the material is dehumidified, please do not open the oven in the middle, so that the oven temperature will not drop to the dehumidification effect.

Please refer to the following operating methods when the material needs to be dehumidified



Correct way: material desiccant need to remove the bag, use the way of hanging baked

正确的方法：材料需要去掉袋子，使用挂烤的方式烘烤。



Wrong way: the material is dehumidified without removing the bag, in a stacking manner

错误的做法是：以堆叠方式或材料不取出袋子烘烤。

ESD


Static Electricity will damage the LED.

The following steps can reduce the likelihood of ESD causing product damage

1. All productive machinery and test instruments must be electrically grounded.
2. Use a conductive wrist band or anti-electrostatic glove when handling these LEDs.
3. Maintain a humidity level of 50%RH or higher in production areas.
4. Use anti-static packaging for transport and storage.

Handling Precautions

1. Do not stack the assembled PCB together. This may scratch the surface of the product or damage the circuit.




2. Not available in the situation of acidity for PH.




3. Electrostatic sensitive device



Package: 1000pcs/reel

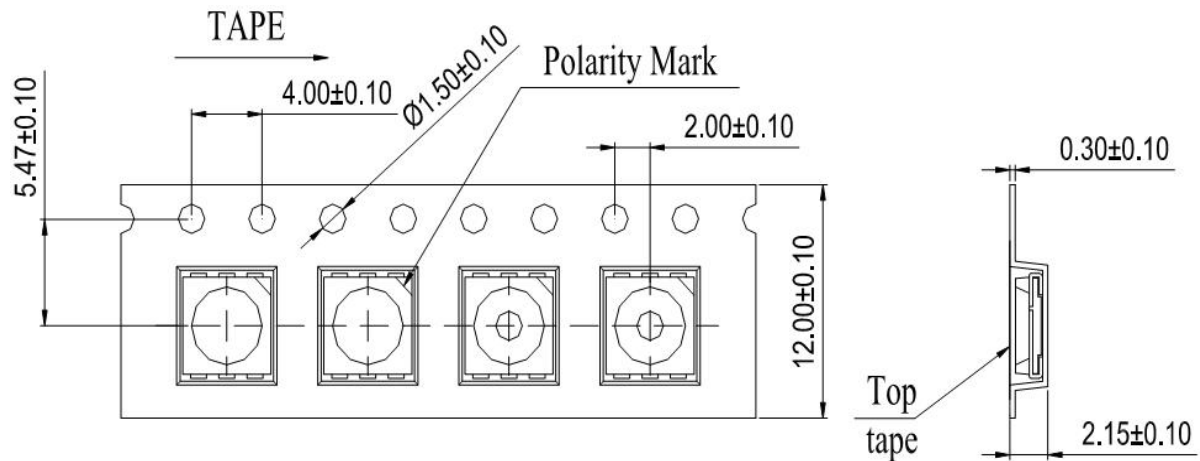


Moisture Resistant Packaging

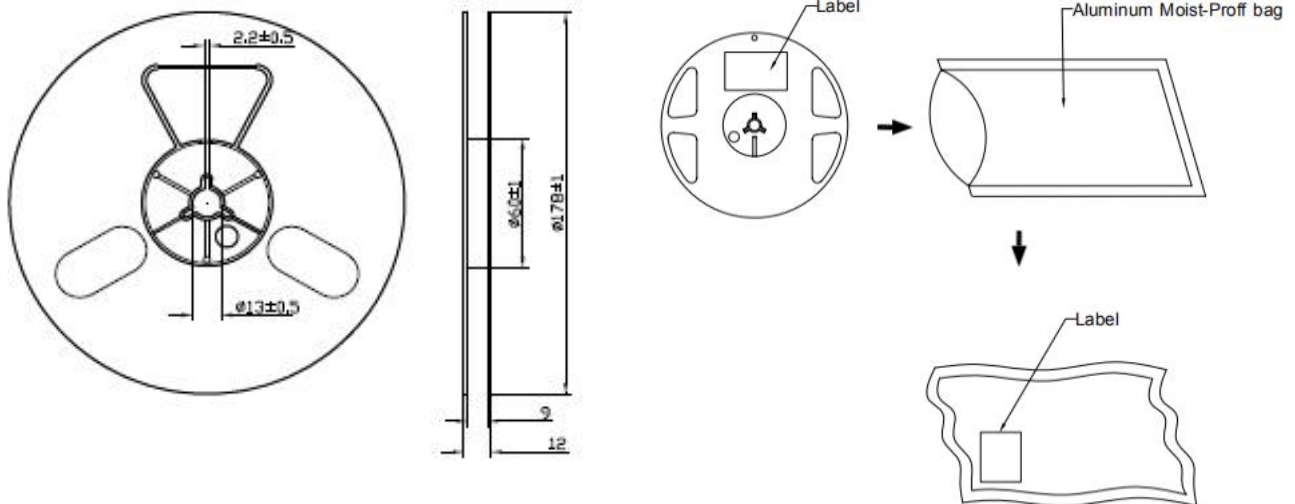

Cardboard Box

Maximum packing quantity (5 packs of material)

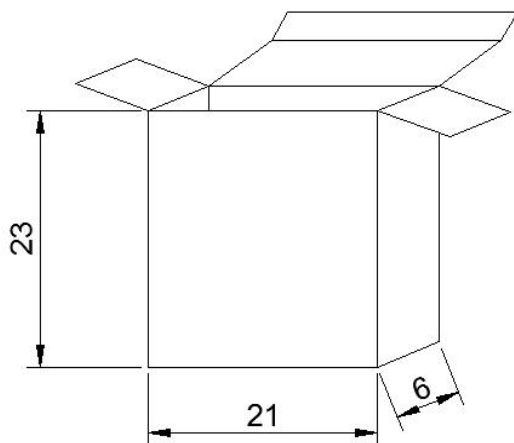

Maximum packing quantity (27 bags of material or 5 small boxes)

