



BNC


TE Internal #: 5-1634514-1

TE Internal Description: BNC Str Jk Hex 75Ohm Nickel Pltd RG59B

/U

[View on TE.com >](#)

Connectors > RF Connectors > Coax Connectors

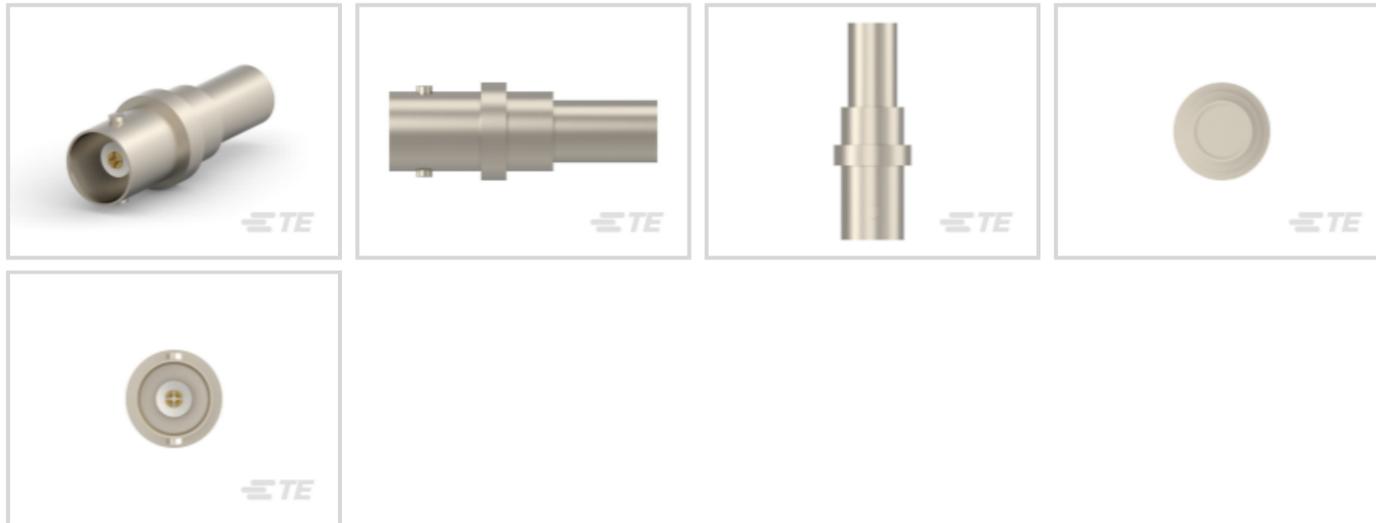

RF Interface: **BNC**

RF Connector Style: **Jack**

RF Connector Mated Outer Diameter (Approximate): **14.53 mm [.572 in]**

Impedance: **75 Ω**

Compatible With RF Cable Type: **RG 140, RG 210, RG 59B, RG 62A, URM 90**

Features

Product Type Features

| | |
|-----------------------------------|--|
| Connector Shape | Circular |
| RF Interface | BNC |
| RF Connector Style | Jack |
| Compatible With RF Cable Type | RG 140, RG 210, RG 59B, RG 62A, URM 90 |
| Connector System | Cable-to-Cable |
| Sealable | No |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| | |
|----------------------------|---|
| Number of Positions | 1 |
| Number of Coaxial Contacts | 1 |

Electrical Characteristics

| | |
|-----------|------|
| Impedance | 75 Ω |
|-----------|------|

Body Features

| | |
|---------------|------|
| Body Material | Zinc |
|---------------|------|

| | |
|----------------------|--------|
| Body Material Finish | Plated |
|----------------------|--------|

| | |
|-----------------------|--------|
| Body Plating Material | Nickel |
|-----------------------|--------|

Contact Features

| | |
|------------|--------------------|
| Crimp Type | Hexagonal Crimping |
|------------|--------------------|

| | |
|---|----------------|
| RF Connector Center Contact Underplating Material | Copper, Nickel |
|---|----------------|

| | |
|--|-----------|
| RF Connector Center Contact Plating Material | Gold (Au) |
|--|-----------|

| | |
|--------------------------------------|-----------------|
| RF Connector Center Contact Material | Phosphor Bronze |
|--------------------------------------|-----------------|

Termination Features

| | |
|------------------------------------|-------|
| Termination Method to Wire & Cable | Crimp |
|------------------------------------|-------|

Mechanical Attachment

| | |
|---------------------------------|---------|
| RF Connector Coupling Mechanism | Bayonet |
|---------------------------------|---------|

| | |
|-------------------------------|------------|
| RF Contact Captivation Method | Mechanical |
|-------------------------------|------------|

| | |
|--------|------|
| Detent | With |
|--------|------|

Housing Features

| | |
|------------------|----------|
| Body Orientation | Straight |
|------------------|----------|

Dimensions

| | |
|---|-------------------|
| RF Connector Mated Outer Diameter (Approximate) | 14.53 mm[.572 in] |
|---|-------------------|

Usage Conditions

| | |
|-------------------|-------------|
| Insulation Option | Uninsulated |
|-------------------|-------------|

Operation/Application

| | |
|---------------------------|-------|
| Operating Frequency Range | 2 GHz |
|---------------------------|-------|

Packaging Features

| | |
|------------------|--------|
| Packaging Method | Carton |
|------------------|--------|

Other

| | |
|-------|------------|
| Grade | Commercial |
|-------|------------|

| | |
|---------------------|-------------------|
| Dielectric Material | Polymethylpentene |
|---------------------|-------------------|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|------------------------------|---------------------------|
| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|------------------------------|---------------------------|

| | |
|-----------------------------|---------------------------|
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
|-----------------------------|---------------------------|



| | |
|---|--|
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量超出标准 Restricted Substance(s) Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (3.1% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | **BNC**



Coax Connectors(165)





RF Cable Assemblies(25)



RF Terminators(1)

Customers Also Bought

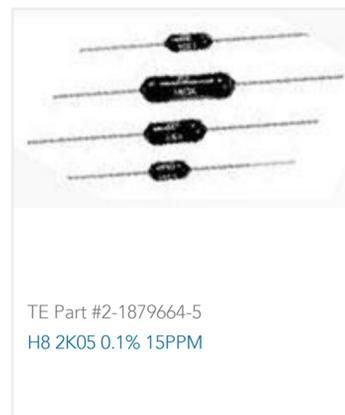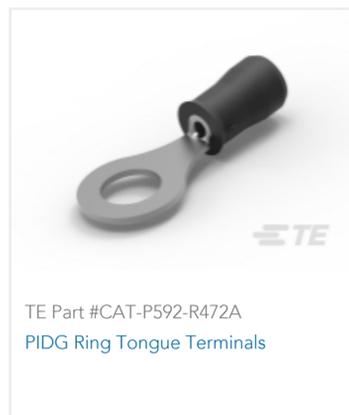

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5-1634514-1_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-1634514-1_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-1634514-1_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ZDC_RF_COAX_CONNECTOR_SERIES_50&75_OHM](#)

English

Product Specifications

[Economy RF Coaxial Connectors](#)

English

[Product Specification](#)

English